

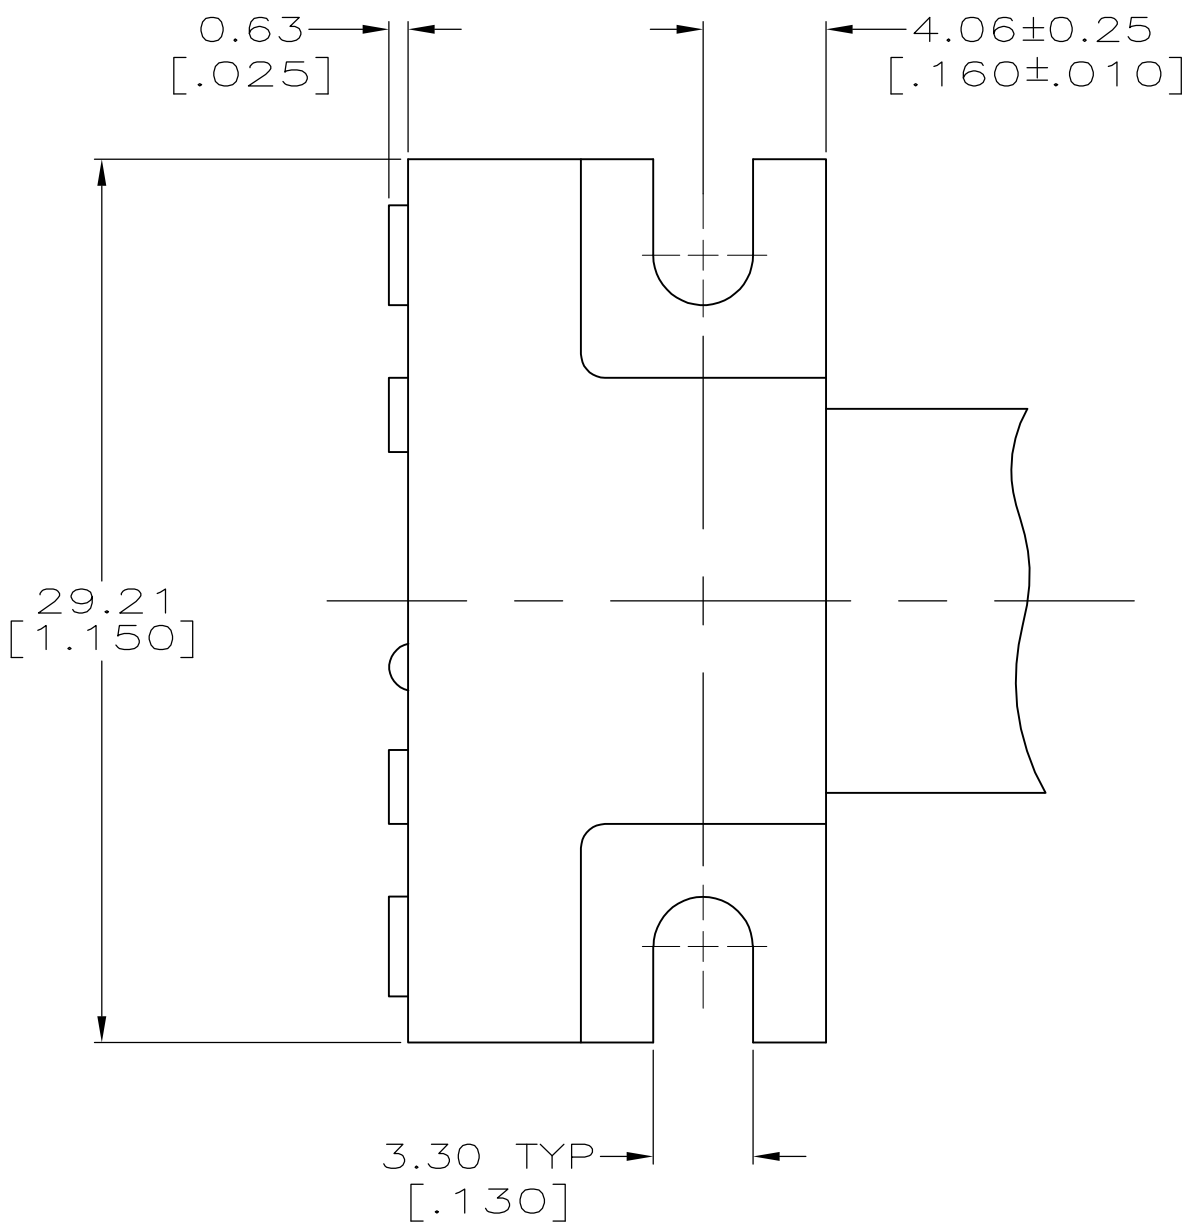
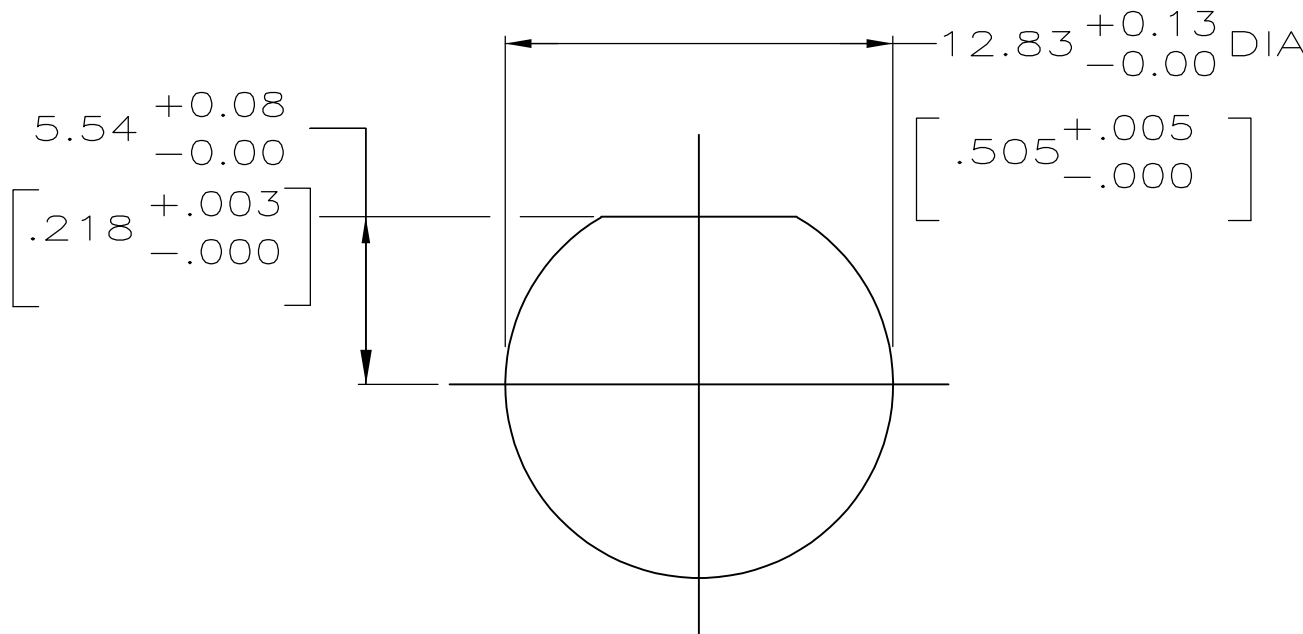



LOC	DIST	REVISIONS					
AJ	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			T	REV PER ECO 08-009474	7/18/2008	DW	JL

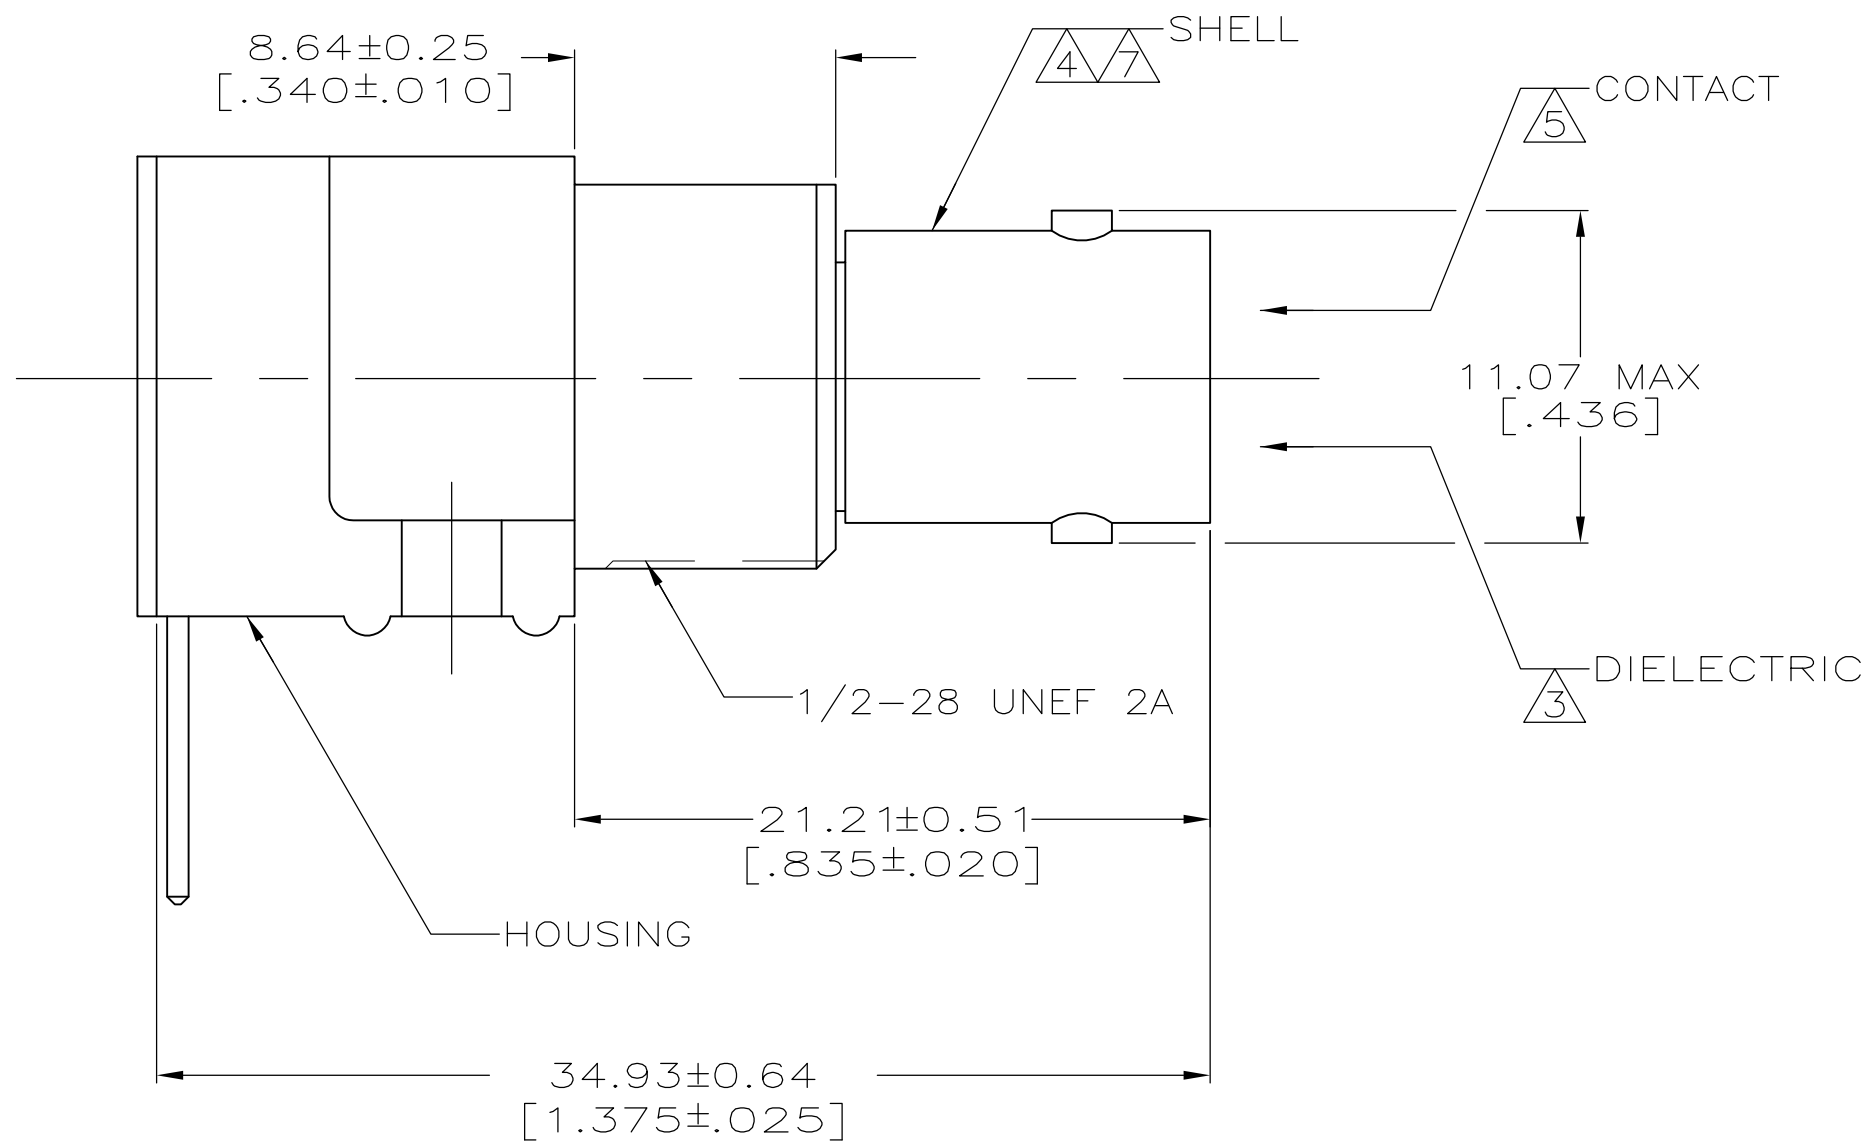

- 1 POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-O RATED, COLOR:NATURAL
- 2 POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-O RATED, COLOR:BLACK
- 3 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 4 ZINC PER QQ-Z-363.
- 5 PHOSPHOR BRONZE PER QQ-B-750.
- 6 BRASS PER ASTM-B-453.
- 7 NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- 8 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 9 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUN THICK.
- 10 SILVER PLATE PER QQ-S-365, 2.54 μm [.000100] MINIMUN THICK.
- 11 SILVER PLATE PER QQ-S-365, 5.08 μm [.000200] MINIMUN THICK.
12. SEE INSTRUCTION SHEET 2769.

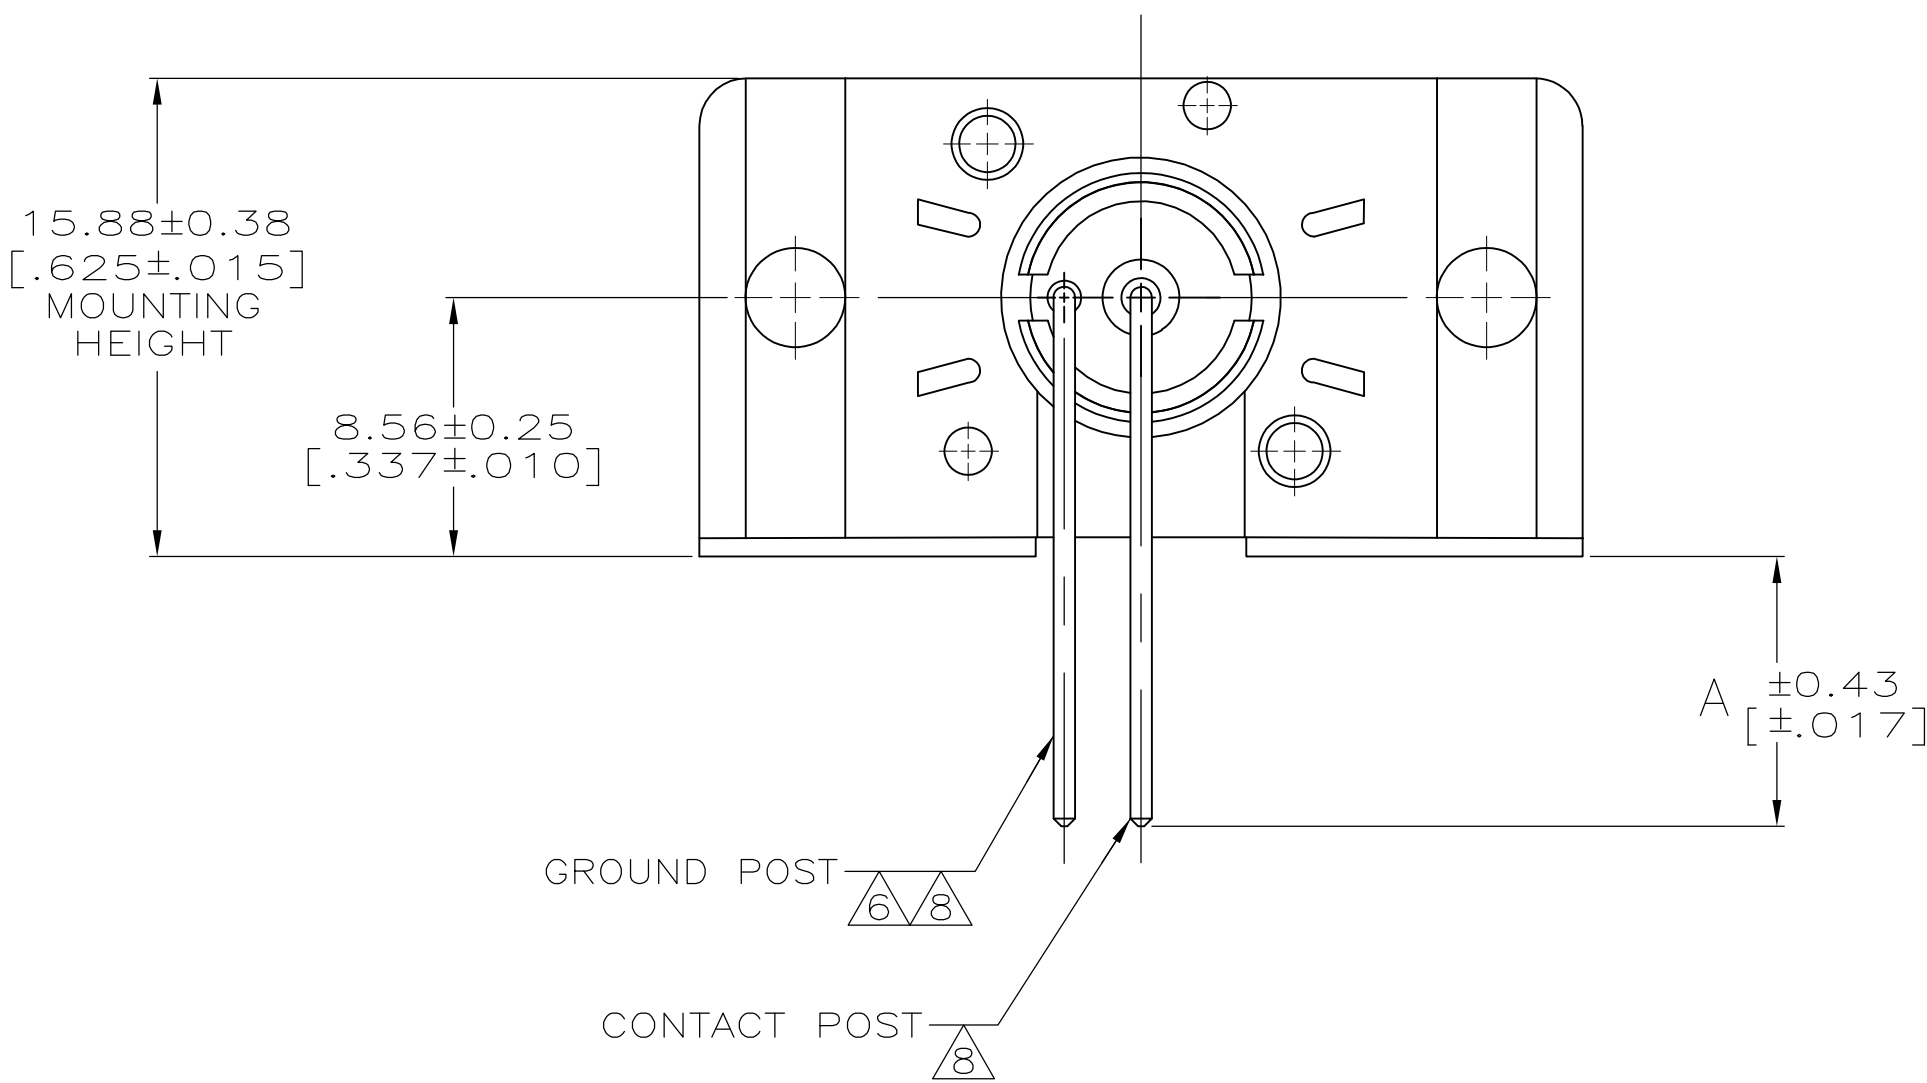

RECOMMENDED PANEL CUTOUT

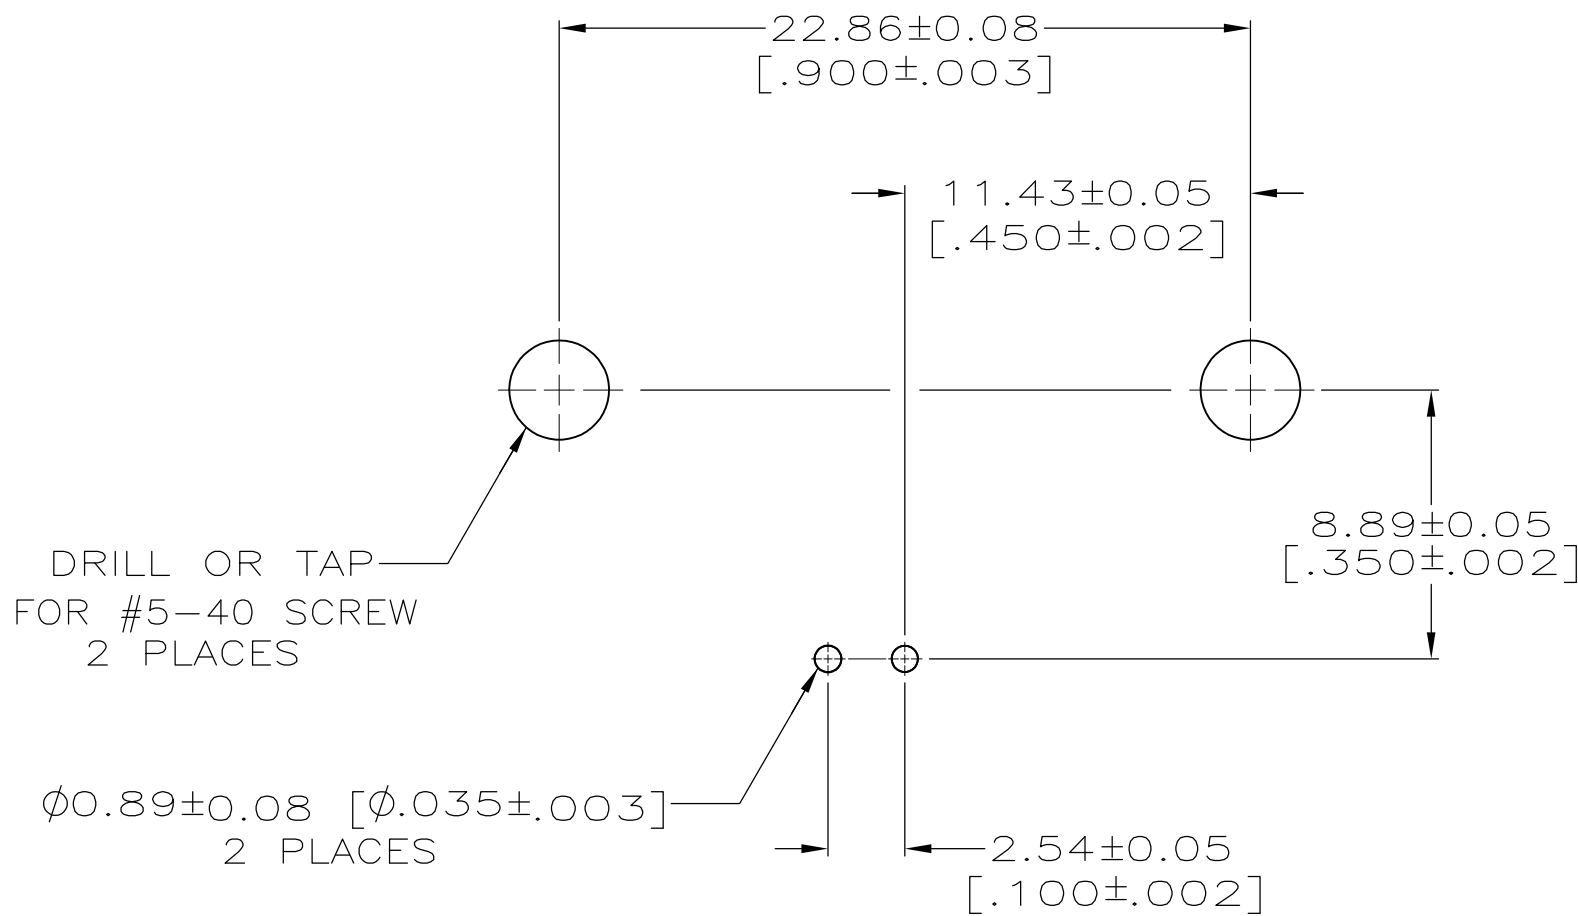

PCB CONFIGURATION

SUPERSEDED BY 226978-3	8.89 [.350]	1	1	226978-7
SUPERSEDED BY 226990-6 OR 227161-6	4.11 [.162]	9	1	226978-6
SUPERSEDED BY 226978-3	4.11 [.162]	10	1	226978-5
SUPERSEDED BY 226990-6 OR 227161-6	4.11 [.162]	10	1	226978-4
	4.11 [.162]	9	1	226978-3
SUPERSEDED BY 226990-2 OR 227161-2	4.11 [.162]	8	1	226978-2
	4.11 [.162]	8	1	226978-1

A	CONTACT PLATING	HOUSING MATERIAL	PART NUMBER
---	-----------------	------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. SCOTT CHK J. LIPPERT APVD A. GARANY	05-06-91 6-7-91 8-7-91	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	PRODUCT SPEC	
		1 PLC	± -	108-12078	
		2 PLC	± 0.20 [.008]	APPLICATION SPEC	
		3 PLC	± -	-	
MATERIAL SEE NOTES 1-6		FINISH SEE NOTES 7-11		SIZE A1	CAGE CODE 00779
				DRAWING NO 226978	RESTRICTED TO -
				CUSTOMER DRAWING	
				SCALE 4:1	SHEET 1 OF 1
				REV T	