



THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	2006
© COPYRIGHT 2006	BY -	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APV
AI	-		J4	REVISED PER ECO-11-005030	24MAR2011	RK	HMR
			J5	ECR-15-003938	26MAR2015	RK	MKO
			J6	ECR-16-016696	15SEP2017	GA	MKO

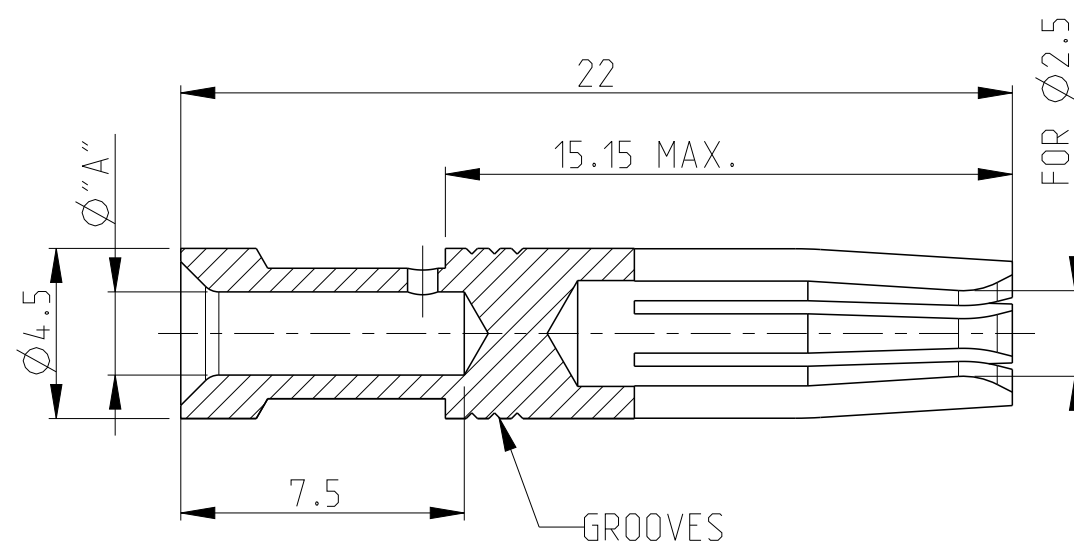


SCALE 2:1

Notes

- | | |
|----|---|
| 1 | MATERIAL: BRASS |
| 2 | FINISH SILVER PLATING: 2 µm Ag MIN. OVER Cu |
| 3 | FINISH GOLD PLATING: 0.75 µm Au MIN. OVER Ni |
| 4 | FINISH TIN PLATING: 0.6 µm Sn. MIN. OVER Cu |
| 5 | VENTILATION HOLE PRESENT ON ALL PARTS |
| 6 | WEIGHT: 0.00160 kg, PER PIECE (APPROX.) |
| 7 | PACKAGING: 50 PIECES IN POLYBAG |
| 8 | PACKAGING: 500 PIECES IN POLYBAG & CARTON |
| 9 | PACKAGING: 20000 PIECES IN POLYBAGS & CARTONS |
| 10 | SUITABLE PIN CONTACT: PN 1105100 |
| 11 | SUITABLE INSERTS: SERIES HA, HE, HVE, HVS |
| 12 | SUITABLE CRIMP TOOL: PN 1-1105851-8 |
| 13 | SUITABLE INSERTION TOOL: PN 0-1102855-6 |
| 14 | SUITABLE EXTRACTION TOOL: PN 0-1102855-7 |
| 15 | STANDARDS: DIN EN 61984, DIN EN 60664-1 |
| 16 | OBSOLETE |

					7	8	9
HE/HA-C-Bu.Sn 4,0mm ²	TIN 4	4.0	2.8	-	-	5-0 16	5-3
HE/HA-C-Bu.Sn 2,5mm ²		2.5	2.2	3	-	4-0	4-3
HE/HA-C-Bu.Sn 1,5mm ²		1.5	1.7	2	-	3-0	3-3
HE/HA-C-Bu.Au 4,0mm ²	GOLD 3	4.0	2.8	-	5-2	5-9 16	-
HE/HA-C-Bu.Au 2,5mm ²		2.5	2.2	3	4-2	4-9 16	-
HE/HA-C-Bu.Au 1,5mm ²		1.5	1.7	2	3-2	3-9 16	-
HE/HA-C-Bu.Au 0,75-1,0mm ²		0.75-1.0	1.4	1	2-2	2-9 16	-
HE/HA-C-Bu.Au 0,5mm ²		0.5	1.1	-	1-2	1-9 16	-
HE/HA-C-Bu.Au 0,14-0,37mm ²		0.14-0.37	0.9	3	6-2	6-9 16	-
HE/HA-C-Bu.Ag 4,0mm ²	SILVER 2	4.0	2.8	-	5-1	5-8 16	-
HE/HA-C-Bu.Ag 2,5mm ²		2.5	2.2	3	4-1	4-8 16	-
HE/HA-C-Bu.Ag 1,5mm ²		1.5	1.7	2	3-1	3-8 16	-
HE/HA-C-Bu.Ag 0,75-1,0mm ²		0.75-1.0	1.4	1	2-1	2-8 16	-
HE/HA-C-Bu.Ag 0,5mm ²		0.5	1.1	-	1-1	1-8 16	-
HE/HA-C-Bu.Ag 0,14-0,37mm ²		0.14-0.37	0.9	3	6-1	6-8 16	-
		[MM ²]	"A"	NO.OF GROOVES	P.U.=50	P.U.=500	P.U.=20000
ORDERING TEXT	PLATING	CROSS SECTION	DIMS		BAG	BOX	BOX
				MARKINGS	PACKAGING UNIT		
		PARTS LIST					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20SEP2007 G.WROBLEWSKI CHK 20SEP2007 H.BRAUN APVD 20SEP2007 T. SCHNURPFIL		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 8075 DIN ISO 2768 mH-E DIN 16901-120		NAME SOCKET CONTACT SERIES HA, HE, HVE	
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±			
MATERIAL 		FINISH 		PRODUCT SPEC 108-74004 APPLICATION SPEC 114-74003 WEIGHT -	
Customer Drawing				SIZE A3	CAGE CODE 00779
				DRAWING NO C-1105101	RESTRICTED TO -
				SCALE 5:1	SHEET 1 OF 1
				REV 16	