
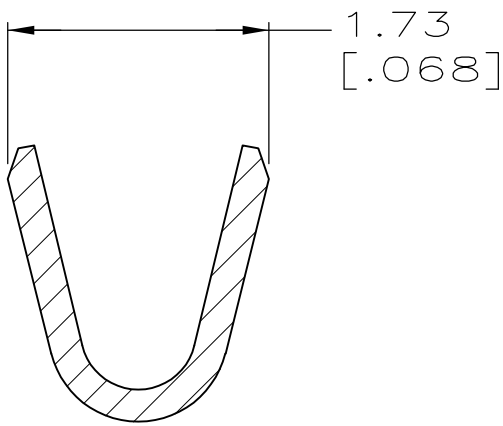
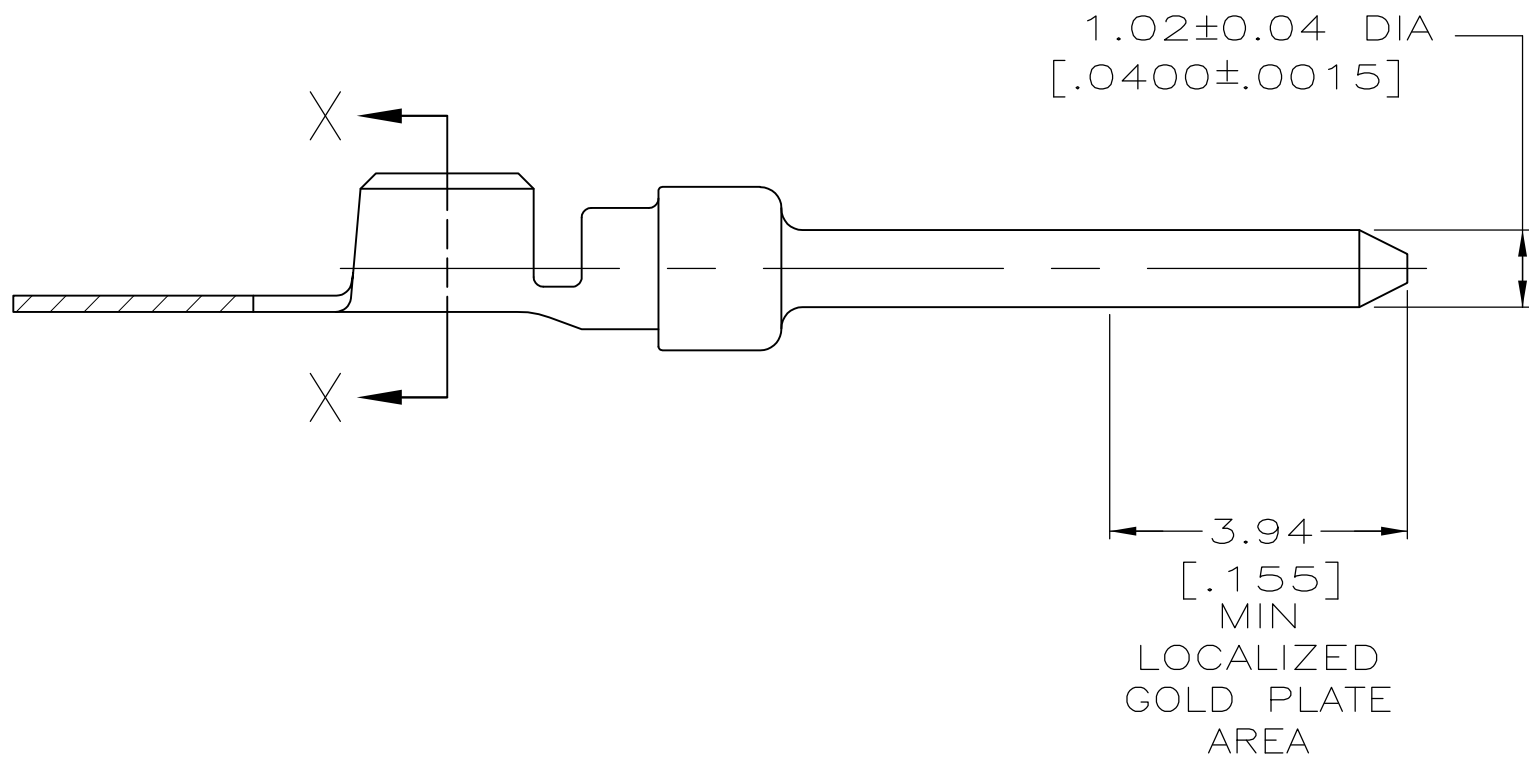


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00		BC1	REVISED PER ECO-11-004835	11MAR11	RK
						HMR

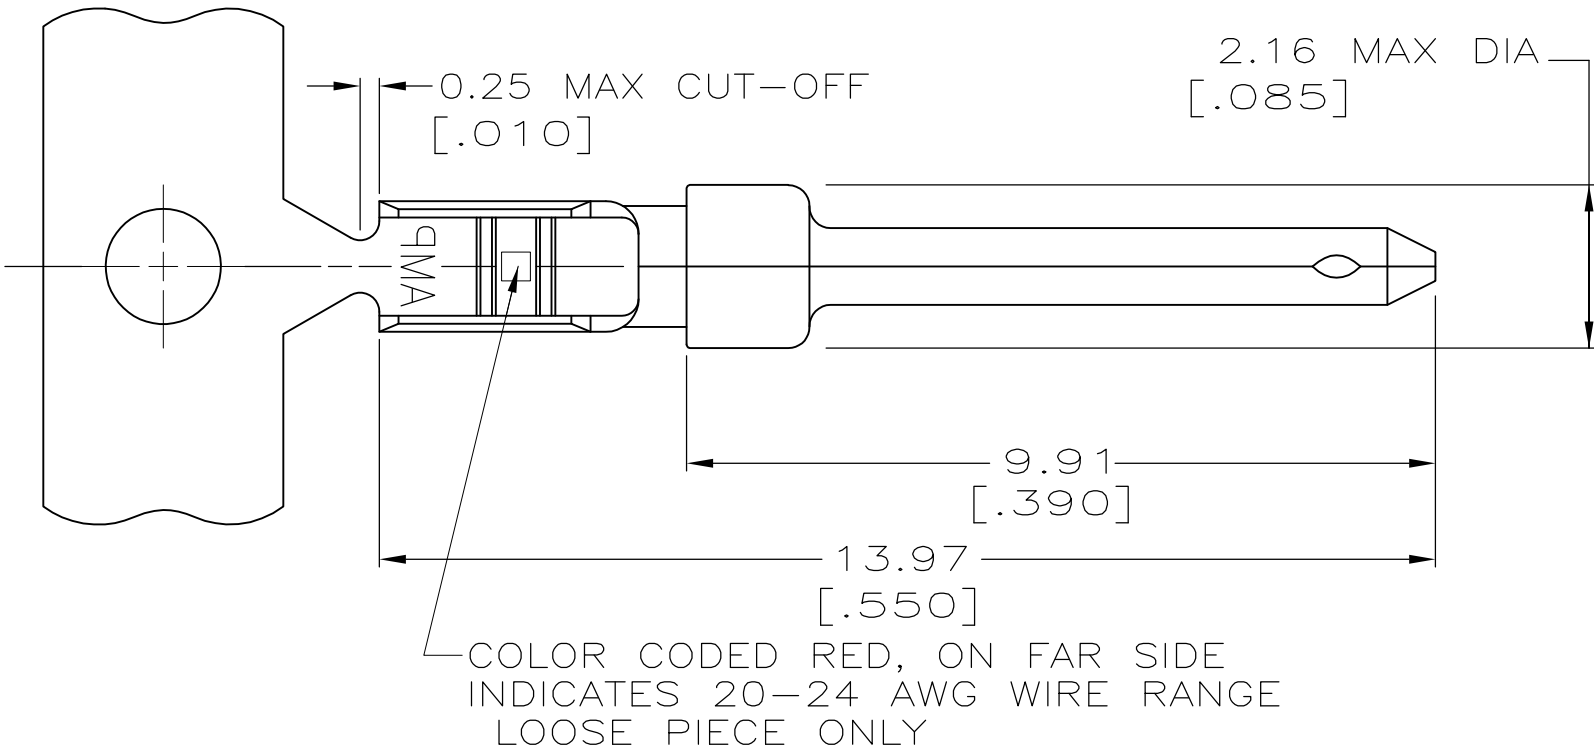

SECTION X-X
WIRE BARREL
SCALE 20:1

- 1

FOR MINI-APPLICATOR.
- 2

FOR HAND TOOL USE ONLY.
- 3

FOR STANDARD APPLICATOR PART #566051 & #566110 ONLY.
- 4

WIRE RANGE OF 20-24 AWG, .068 MAX INSULATION DIA.
- 5

GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP.
- 6

GOLD PLATING PER MIL-G-45204.
NICKEL PLATING PER QQ-N-290.
TIN PLATING PER MIL-T-10727.
- 7

GOLD PLATED IN LOCALIZED GOLD PLATE AREA AS FOLLOWS:
0.76µm [.000030] MIN GOLD IN MATED AREA,
GOLD FLASH ON REMAINDER OF CONTACT, ALL OVER
1.27µm [.000050] MIN NICKEL UNDERPLATE.
OR
GOLD FLASH OVER
PALLADIUM-NICKEL PLATE, 0.76µm [.000030] MIN TOTAL IN MATED AREA,
GOLD FLASH ON REMAINDER OF CONTACT. ALL OVER
1.27µm [.000050] MIN NICKEL UNDERPLATE.
- 8

PLATED WITH GOLD FLASH OVER
0.76µm [.000030] MIN NICKEL.
- 9

PLATED WITH 2.54µm-5.08µm [.000100-.000200] TIN.
- 10

PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA,
TIN PLATED WIRE BARREL, OVER
0.76µm [.000030] NICKEL.
- 11

GOLD PLATED IN LOCALIZED GOLD PLATED AREA,
0.76µm [.000030] GOLD IN MATED AREA,
TIN PLATED WIRE BARREL, OVER
1.27µm [.000050] NICKEL.

SUPERSEDED BY 205202-2	STANDARD	11	1	STRIP	2-205202-5
SUPERSEDED BY 205202-6	STANDARD	10	1	STRIP	2-205202-2
SUPERSEDED BY 205202-6	STANDARD	9	1	STRIP	1-205202-4
OBSOLETE	STANDARD	8	2	LOOSE PIECE	205202-7
	STANDARD	8	1	STRIP	205202-6
	STANDARD	7	2	LOOSE PIECE	205202-4
	STANDARD	7	1	STRIP	205202-2
PACKAGING TYPE		FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 9-9-86	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK C. RICHARD 9-9-86			
		APVD V. KUMAR 9-10-86	NAME		
		PRODUCT SPEC	PIN CONTACT, SIZE 20 DF, 20-24 AWG, AMPLIMITE		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	-		
MATERIAL BRASS PER MIL-C-50		114-10000	SIZE A2	CAGE CODE 00779	DRAWING NO C=205202
FINISH SEE TABLE 6		WEIGHT -	SCALE 10:1	SHEET 1 of 1	REV BC1
		CUSTOMER DRAWING	RESTRICTED TO -		