
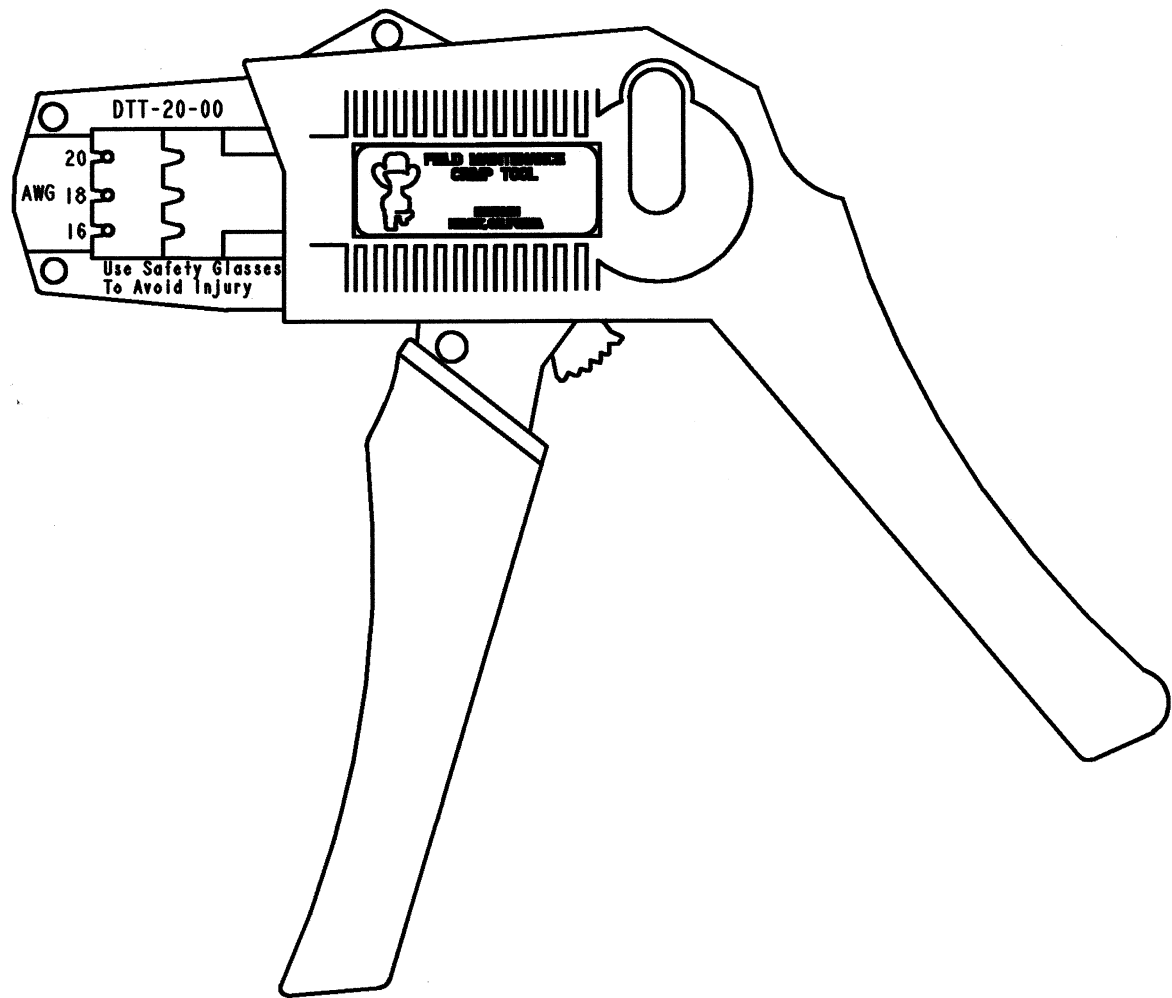


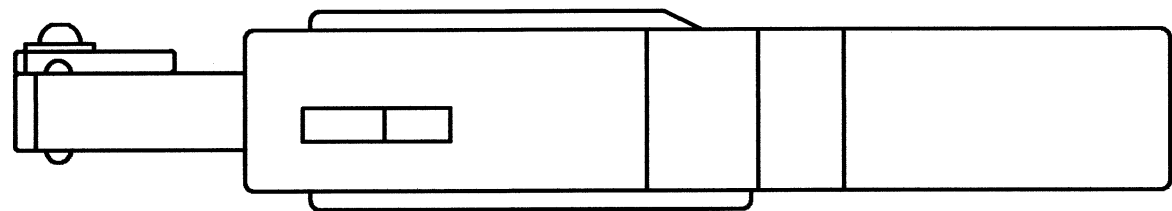

REV
E

DTT-20-00

REVISIONS

SYM	DESCRIPTION	DATE	APPROVED
B	REVISED PER E.O. PI9405	11-20-06	R.D.R.
C	REVISED PER E.O. PI9742	1-24-08	R.D.R.
D	REVISED PER E.O. P20232	5-20-09	R.D.R.
E	REVISED PER E.O. P20709	12-23-10	RDR

CONTACT PART NUMBER	CONTACT SIZE	TOOL CAVITY	CONDUCTOR RANGE	INSULATION RANGE
3 2 1060-20-01** PIN 1062-20-01** SOCKET 1062-20-03** SOCKET, SLEEVELESS	20	20 18 16	20 AWG [0.50 - 0.80mm ²] 18 AWG [0.60 - 0.80mm ²] 16 - 18 AWG [0.75 - 1.50mm ²]	.075 - .125 [1.91 - 3.18] .075 - .125 [1.91 - 3.18] .075 - .125 [1.91 - 3.18]

3. THIS TOOL IS DESIGNED TO CRIMP SIZE 20 STAMPED CONTACTS TO WIRE INDICATED.

2. WHEN ** = 22, CONTACT PLATING IS NICKEL.
WHEN ** = 44, CONTACT PLATING IS SELECTIVE GOLD.
WHEN ** = 66, CONTACT PLATING IS TIN/NICKEL.

1. ALL DIMENSIONS ARE IN INCHES [mm].
NOTES: UNLESS OTHERWISE SPECIFIED

TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMALS: .XXX±.005 ANGLES: ±0°30'0" TIR: .010 PARTS TO BE FREE OF BURRS AND SHARP EDGES		SIGNATURE & DATE		FIELD MAINTENANCE CRIMP TOOL 20 SIZE STAMPED CONTACT ENVELOPE		EP		MATL. CODE	
MATERIAL		DR	A. LEE 12JUNE97			 3850 INDUSTRIAL AVE. HEMET, CA 92545			
		CHK	<i>[Signature]</i> 12/23/10						
		PE	<i>[Signature]</i> 12/6/2010						
FINISH		APPD	<i>[Signature]</i> 12-20-10	B		DTT-20-00			
		SCALE NONE	WT						
						DWG SIZE		CODE 11139	
								SHEET OF	