

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
TERMINALS: BRASS, TIN PLATED. (UNLESS OTHERWISE STATED)
SCREWS: 8-32 STEEL, NICKEL PLATED. (UNLESS OTHERWISE STATED)
Q.C. TABS: BRASS, NICKEL PLATED.

MECHANICAL:
PITCH (TERMINAL SPACING): .563"
WIRE RANGE: 10-22 AWG
RECOMMENDED TIGHTENING TORQUE: 14IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T5	PART STATUS UPDATED	22JAN2018	RK	PS

1	1546310-3	7.886	8.323	13	1-1546310-3
2	1546310-8	7.323	7.760	12	4-1546310-8
3	1546310-7	7.323	7.760	12	4-1546310-7
4	1546310-6	7.323	7.760	12	4-1546310-6
5	1546310-2	7.323	7.760	12	1-1546310-2
6	1546310-1	6.760	7.179	11	1-1546310-1
7	1546310-0	6.197	6.634	10	1-1546310-0
8	1546310-9	5.634	6.071	9	1546310-9
9	1546310-5	5.071	5.508	8	4-1546310-5
10	1546310-9	5.071	5.508	8	2-1546310-9
11	1546310-8	5.071	5.508	8	1546310-8
12	1546310-8	4.508	4.945	7	3-1546310-8
13	1546310-7	4.508	4.945	7	1546310-7
14	1546310-4	3.945	4.382	6	4-1546310-4
15	1546310-3	3.945	4.382	6	4-1546310-3
16	1546310-2	3.945	4.382	6	4-1546310-2
17	1546310-1	3.945	4.382	6	3-1546310-1
18	1546310-0	3.945	4.382	6	3-1546310-0
19	1546310-8	3.945	4.382	6	2-1546310-8
20	1546310-6	3.945	4.382	6	2-1546310-6
21	1546310-3	3.945	4.382	6	2-1546310-3
22	1546310-2	3.945	4.382	6	2-1546310-2
23	1546310-1	3.945	4.382	6	2-1546310-1
24	1546636-1	3.945	4.382	6	1546636-1
25	1546310-9	3.945	4.382	6	1-1546310-9
26	1546589-1	3.945	4.382	6	1546589-1
27	1546310-6	3.945	4.382	6	1546310-6
28	1546310-7	3.382	3.819	5	3-1546310-7
29	1546310-7	3.382	3.819	5	2-1546310-7
30	1546310-5	3.382	3.819	5	1546310-5
31	1546310-0	2.819	3.256	4	5-1546310-0
32	1546310-1	2.819	3.256	4	4-1546310-1
33	1546310-0	2.819	3.256	4	4-1546310-0
34	1546310-9	2.819	3.256	4	3-1546310-9
35	1546310-4	2.819	3.256	4	1546310-4
36	1546310-5	2.256	2.693	3	2-1546310-5
37	1546310-4	2.256	2.693	3	2-1546310-4
38	1546310-0	2.256	2.693	3	2-1546310-0
39	1546310-3	2.256	2.693	3	1546310-3
40	1546310-1	1.693	2.130	2	5-1546310-1
41	1546310-2	1.693	2.130	2	1546310-2

NOTES

9

OTB JUMPER

8

.250 QC TAB
90° DOUBLE SIDE

7

.250 QC TAB
90°/45° DOUBLE
SIDE

6

.250 QC TAB
90° DOUBLE SIDE

5

.250 QC TAB
45° DOUBLE SIDE

4

.250 QC TAB
STRAIGHT DOUBLE
SIDE

3

.250 QC TAB
90° SINGLE SIDE

2

.250 QC TAB
45° SINGLE SIDE

1

.250 QC TAB
STRAIGHT SINGLE
SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES, UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL -

FINISH -

DWN S SCHLEGEL 16FEB2007

CHK S YODER 2/16/07

APVD S YODER 2/16/07

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity Ltd.

NAME 14.3 (.563) DBL ROW BARRIER STRIP
W/O WASHER -

SIZE A2CAGE CODE 00779DRAWING NO 1546310RESTRICTED TO -

SCALE NTS SHEET 1 OF 4 REV T5

4

3

2

1




D

C

B

A

1471-9 (1/15)

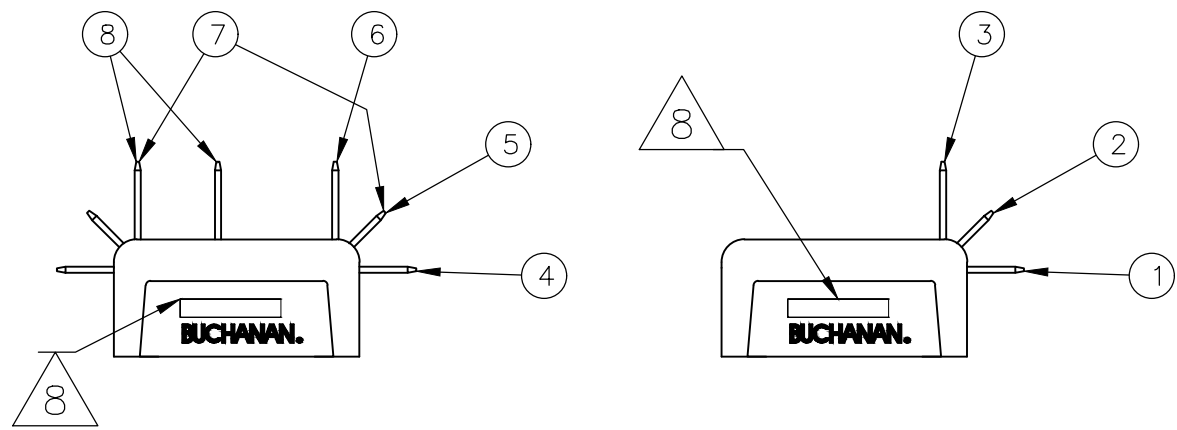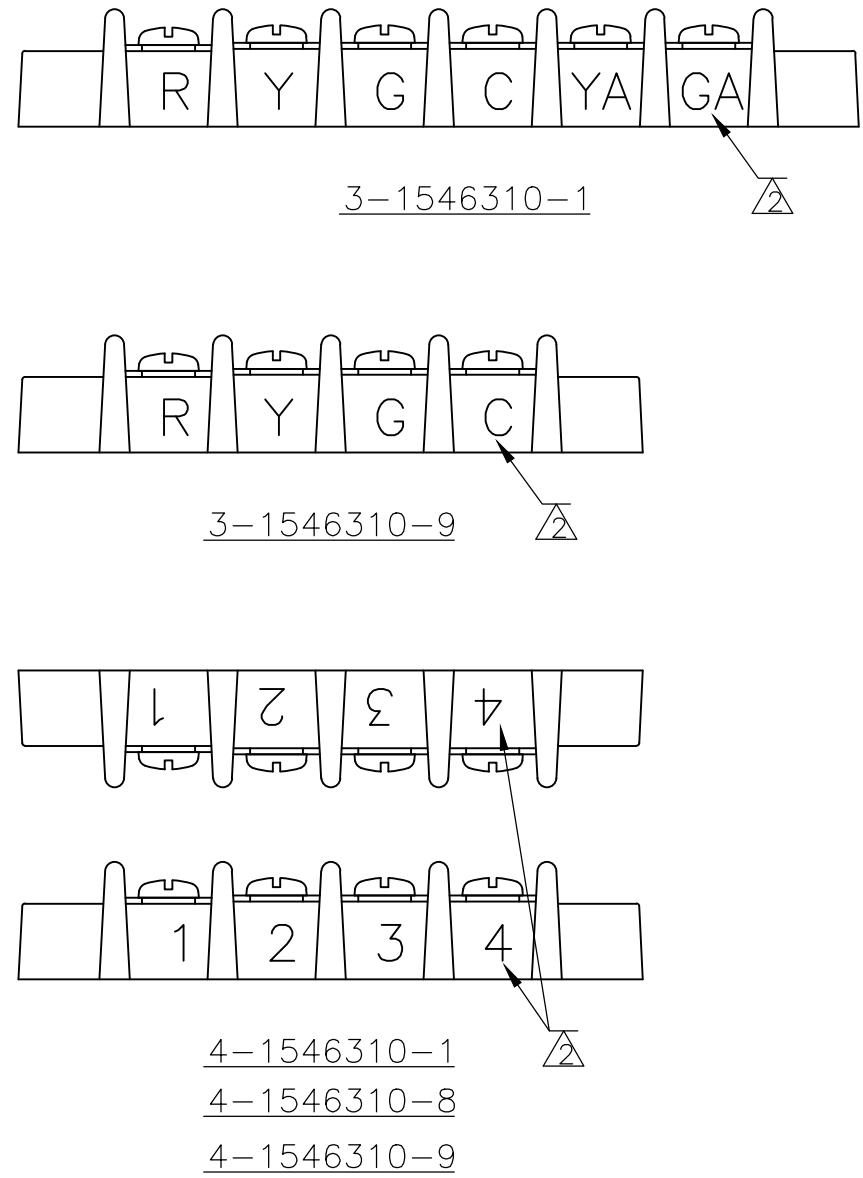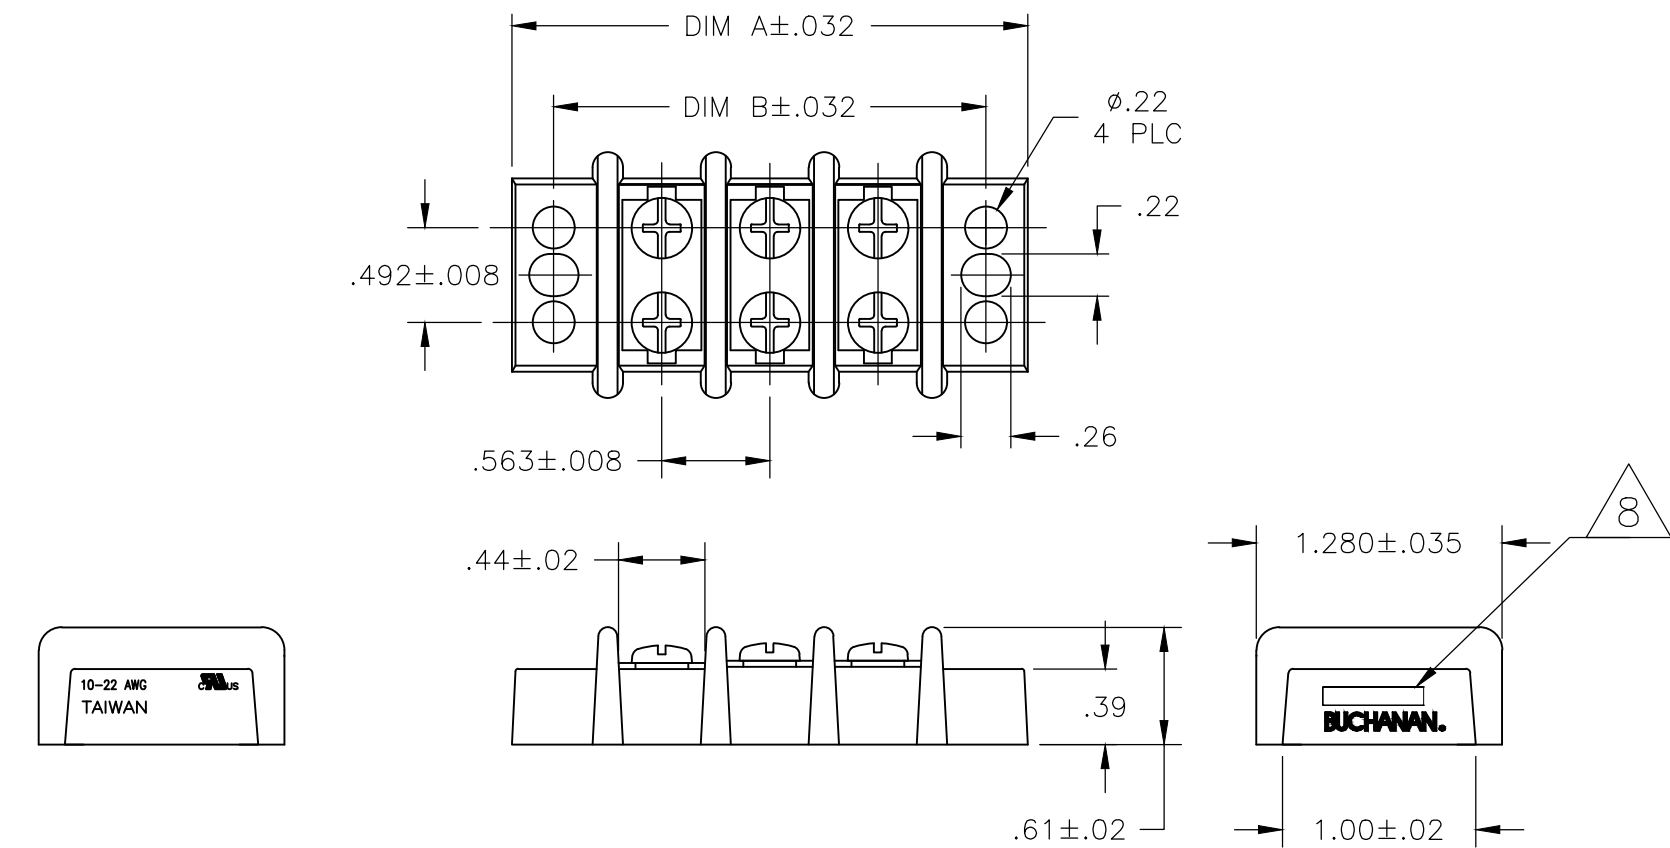

	-	-	-	-	-	-	2	-	2	-	1.693	2.130		5-1546310-1
	-	-	-	-	-	-	-	-	-	-	10.701	11.138	18	1-1546310-8
	-	-	-	-	-	-	-	-	-	-	10.138	10.575	17	1-1546310-7
	-	-	-	-	-	-	-	-	-	-	9.575	10.012	16	1-1546310-6
	-	-	-	-	-	-	-	-	-	-	9.012	9.449	15	1-1546310-5
	-	-	-	-	-	-	-	-	14	14	8.449	8.886	14	4-1546310-9
	-	-	-	-	-	-	-	-	-	-	8.449	8.886	14	1-1546310-4
NOTES	9	8	7	6	5	4	3	2	1		DIM B	DIM A	NO. OF POSN	PART NUMBER
	OTB JUMPER	.250 QC TAB 90° DOUBLE SIDE	.250 QC TAB 90°/45° DOUBLE SIDE	.250 QC TAB 90° DOUBLE SIDE	.250 QC TAB 45° DOUBLE SIDE	.250 QC TAB STRAIGHT DOUBLE SIDE	.250 QC TAB 90° SINGLE SIDE	.250 QC TAB 45° SINGLE SIDE	.250 QC TAB STRAIGHT SINGLE SIDE					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

-

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH

-

DWN 16FEB2007

CHK 2/16/07

APVD 2/16/07

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

16FEB2007

2/16/07

2/16/07

TE Connectivity Ltd.

14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER

SIZE A2

CAGE CODE 00779

DRAWING NO C-1546310

RESTRICTED TO


SCALE NTS

SHEET 2 OF 4


REV T5

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D

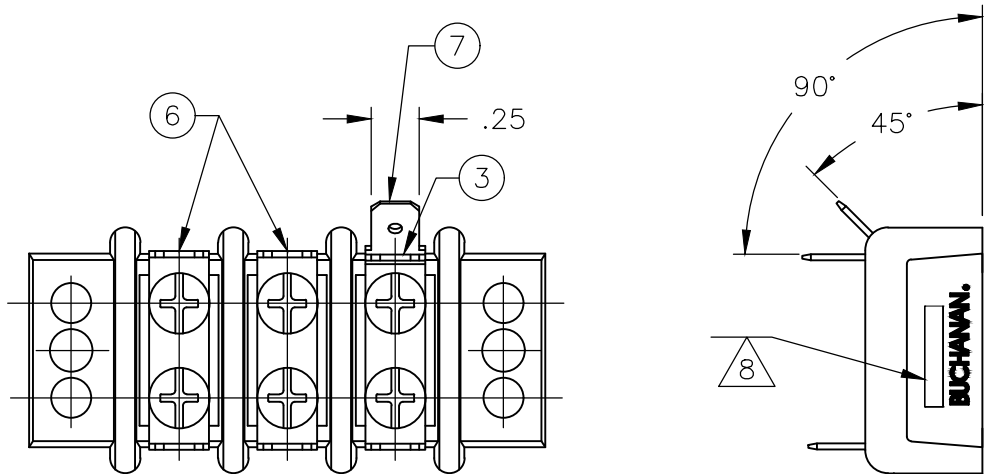


2-1546310-0

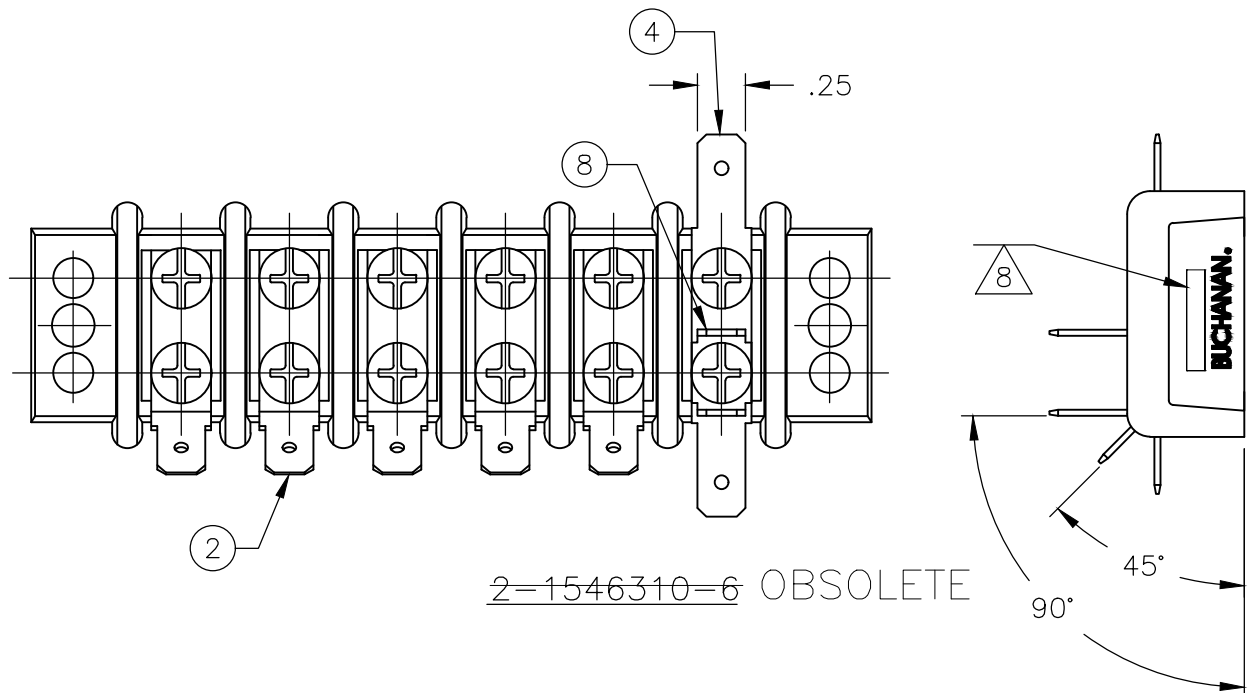


2-1546310-6 OBSOLETE


C

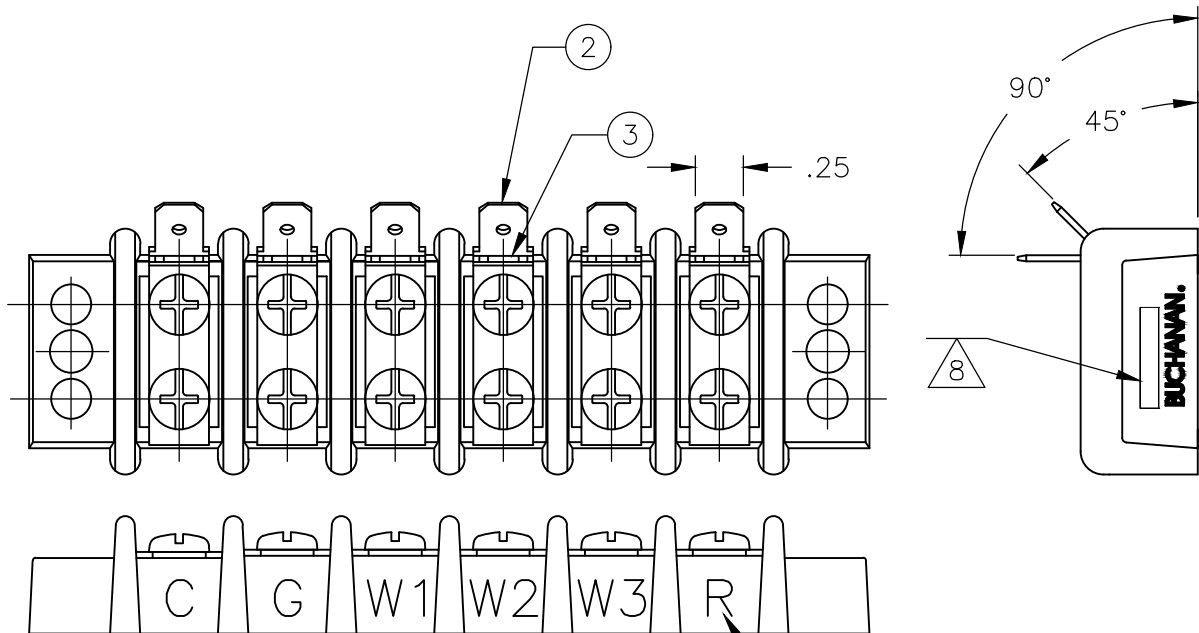

OBSOLETE 2-1546310-1

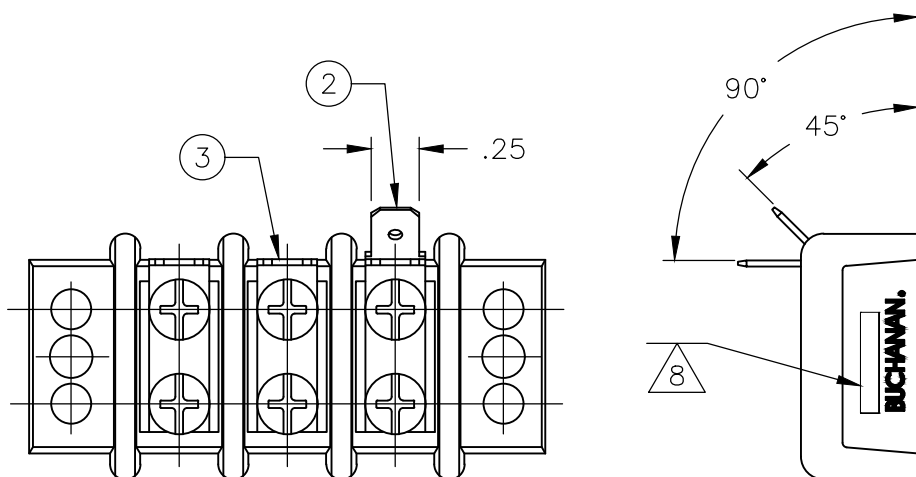

2-1546310-4 OBSOLETE

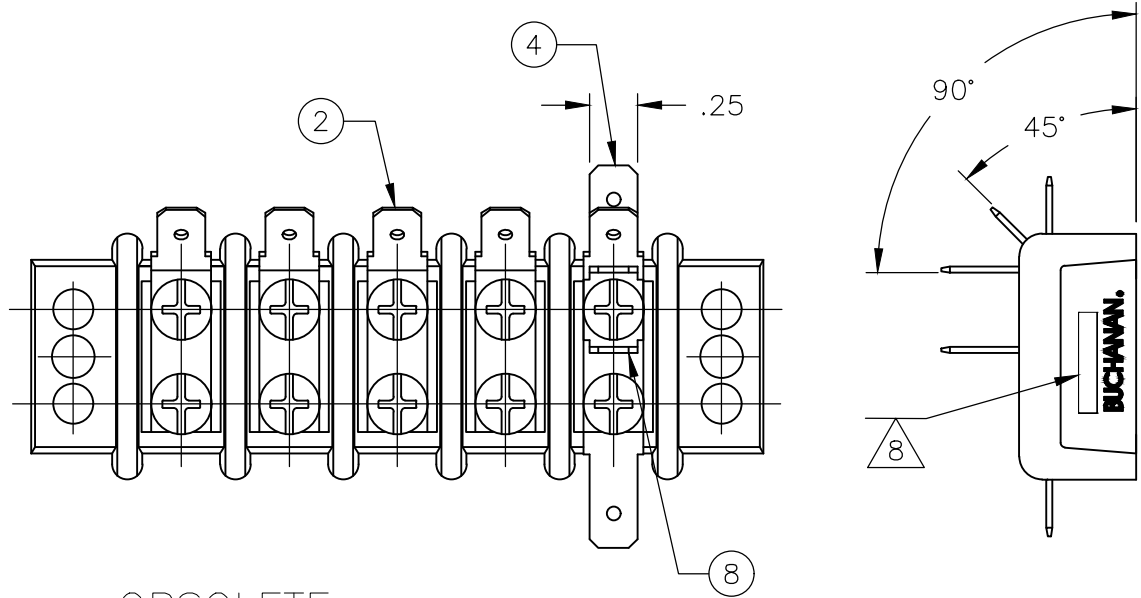

OBSOLETE 2-1546310-7

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 16FEB2007	 TE Connectivity Ltd.		
DIMENSIONS: INCHES		CHK S YODER 2/16/07			
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD S YODER 2/16/07	NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC			
MATERIAL		FINISH	SCALE A2	CAGE CODE 00779	DRAWING NO C-1546310
			CUSTOMER DRAWING	RESTRICTED TO	
			SCALE NTS	SHEET 3 OF 4	REV T5

D

C

1546310

B

A

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

D

C

B



A


D

C

B

A

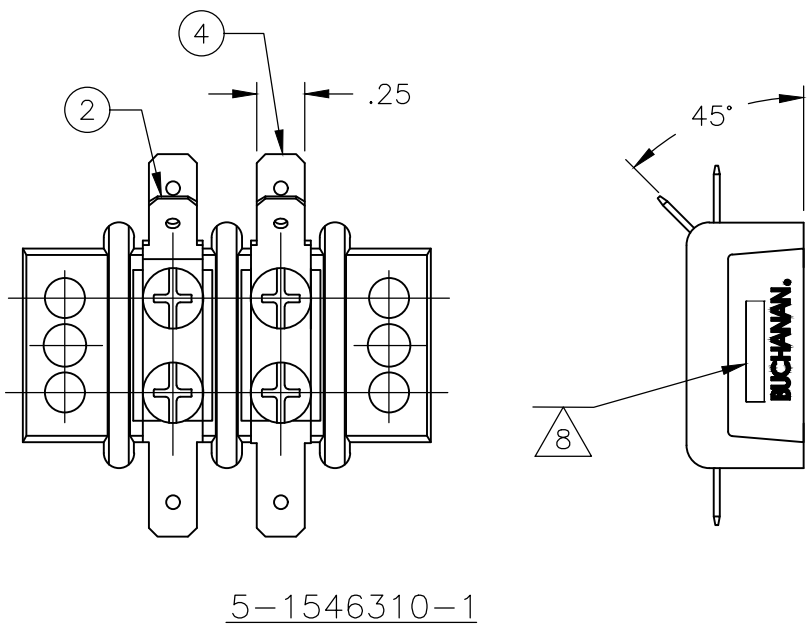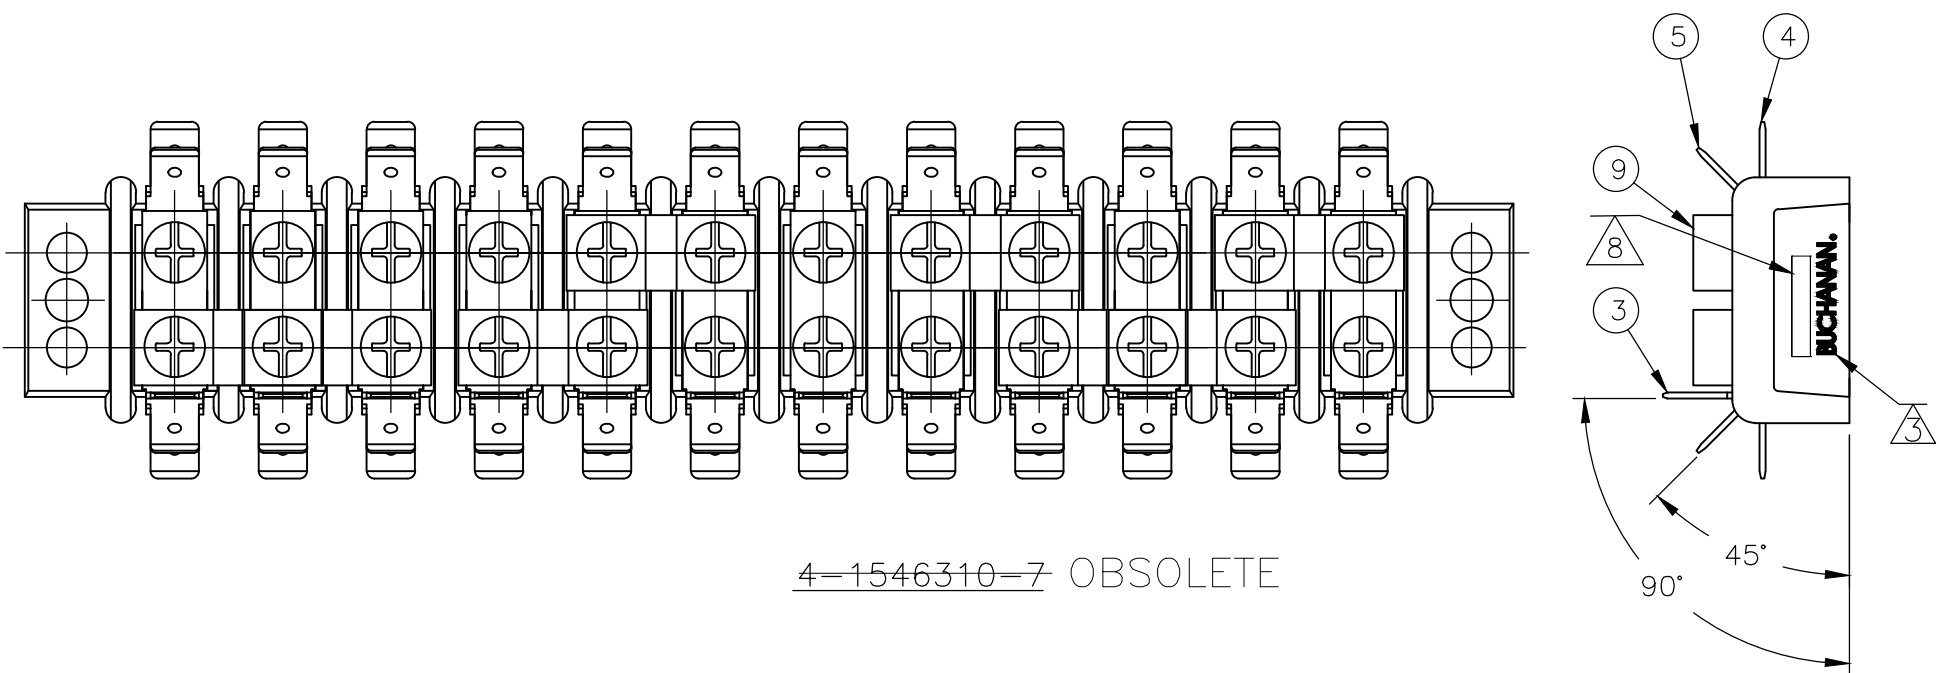

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16FEB2007	 TE Connectivity Ltd.		
		CHK	2/16/07			
		APVD	2/16/07			
		PRODUCT SPEC				
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC	± -	14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
		1 PLC	± -			
		2 PLC	± -			
		3 PLC	± -			
		4 PLC	± -			
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO
				A2	00779	C-1546310
				RESTRICTED TO		
				CUSTOMER DRAWING		
				SCALE	SHEET	REV
				NTS	4 OF 4	T5

1546310