
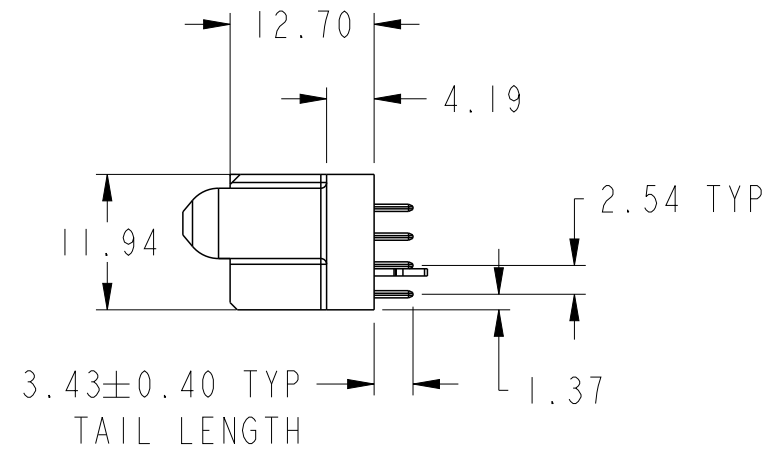
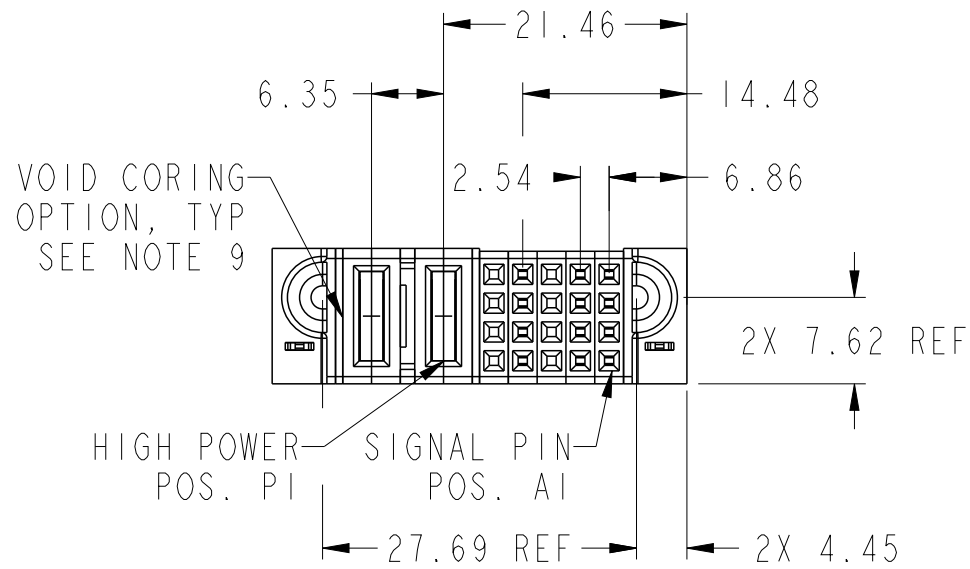
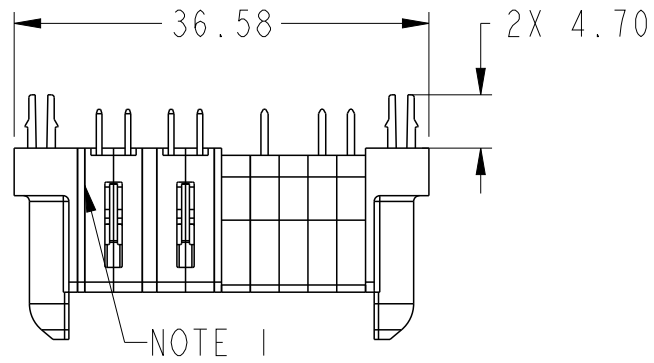


PRODUCT NUMBER SEE SHEET 2

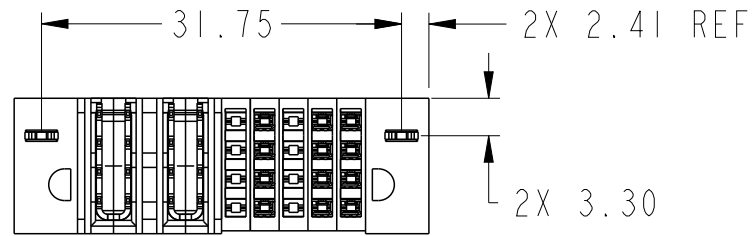

spec ref				dr	Sunny2 Liu	2017/07/12	projection 	MM 	size	A3	scale	3:2	
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/08/01			ecn no				-
				chr	Fancy Zhang	2017/08/01			rel level				Released
				appr	Pei-Ming Zheng	2017/08/01			product family				PowerBlade+
surface ISO 1302 	linear	0.X	±0.5	Amphenol FCi	title 20S + 2HP VT STB RECEPTACLE				dwg no	10106130-2005001		rev	A
		0.XX	±0.25										
		0.XXX	±0.10										
		angular	0°	±2°		cat. no.			Product - Customer Drw				sheet 1 of 3

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Sunny2 Liu	2017/07/12		projection		MM		size		A3		scale		1:1										
tolerance ref std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu	2017/08/01						ecn no						-								
chr						Fancy Zhang		2017/08/01		rel level						Released													
appr						Pei-Ming Zheng		2017/08/01		product family						PowerBlade+													
surface  ISO 1302		linear		0.X		±0.5		Amphenol FCi		title		20S + 2HP						dwg no		10106130-2005001						rev		A	
				0.XX		±0.25																							
				0.XXX		±0.10																							
		angular		0°		±2°						cat. no.								Product - Customer Drw									