
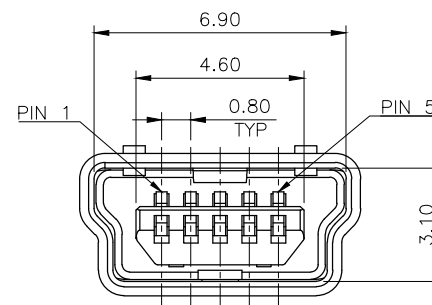
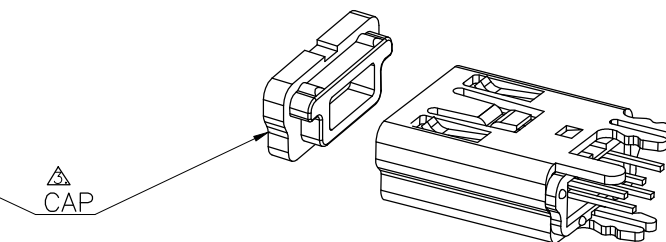


LOC	DIST	REVISIONS					
DW	/	P	LTR	DESCRIPTION	DATE	OWN	APVD
			A1	REVISED (ECR-14-008082), ADD NEW PN	29MAY'14	S.C.	H.L.

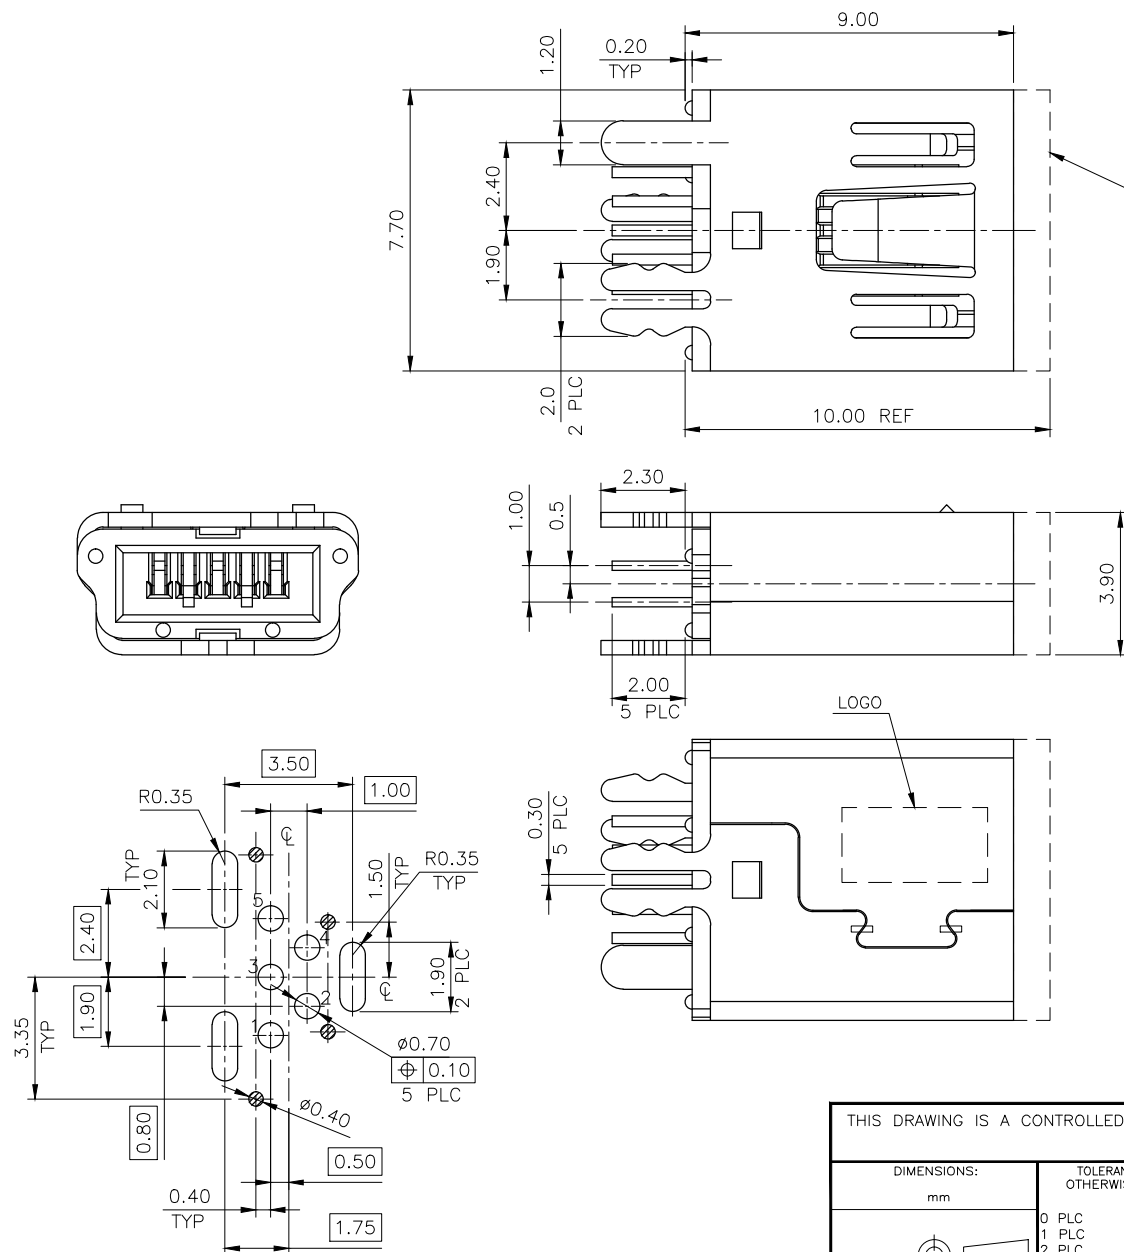


NOTE:

1. MATERIAL:
HOUSING: PA9T, UL 94V-0, BLACK COLOR.
CAP: LCP, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: 0.762 μ m [30 μ "] MIN. GOLD PLATED ON CONTACT AREA,
2.54 μ m [100 μ "] MIN. MATTE TIN PLATED ON SOLDER TAIL,
1.27 μ m [50 μ "] MIN. NICKEL UNDERPLATED ALL OVER.
SHELL: 2.54 μ m [100 μ "] MIN. BRIGHT TIN PLATED OVER
1.27 μ m [50 μ "] MIN. NICKEL UNDERPLATED ALL OVER.
- △ OPTION PART : CAP
4. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC.
109-201, CONDITION B.
5. CAP WEIGHT : 0.789 gram

WITH	2041517-2
W/O	2041517-1
CAP 	PART NUMBER

RECOMMENDED PCB LAYOUT (THICKNESS:1.6mm)
(DIMENSION TOLERANCE: 1PLC:±0.1 2PLC:±0.05)
⊙ KEEP OUT AREA FOR HOUSING STAND OFF

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. CHEN 01JUN2012 CHK S. CHIEN 01JUN2012 APVD W. KODAMA 01JUN2012		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		NAME MINI USB CONNECTOR, RECEPTACLE VERTICAL, DIP, B TYPE	
MATERIAL SEE NOTE		FINISH SEE NOTE		PRODUCT SPEC 108-57912 APPLICATION SPEC 	
		WEIGHT 0.725 g		SIZE A3	
		CUSTOMER DRAWING		CAGE CODE 00779	
		DRAWING NO C=2041517		RESTRICTED TO -	
		SCALE -		SHEET 1 of 3	
		REV A1			

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

C

COPYRIGHT 2010

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

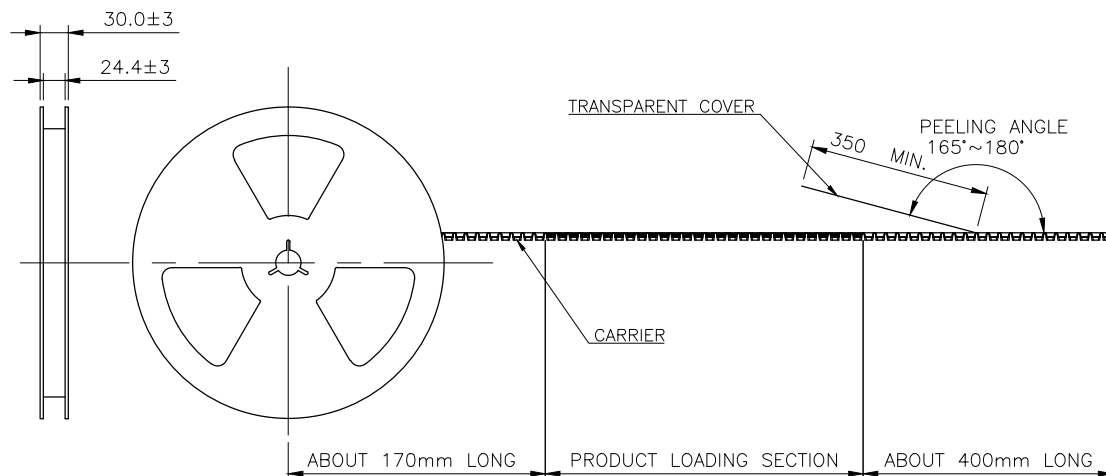

NOTE:

1. MATERIAL:

COVER TAPE: PET, WHITE COLOR.

CARRIER TAPE: PS.

REEL: PS.

SHIPPING BOX: CORRUGATED FIBER.

2. DIMENSION:

REEL: SEE DRAWING.


SHIPPING BOX: SEE DRAWING.

3. QUANTITY: SEE TABLE.

4. WEIGHT: SEE TABLE.



5. PEELING RESISTANCE: 10gf ~ 130gf

6. PEELING SPEED: 300mm/MINUTE.

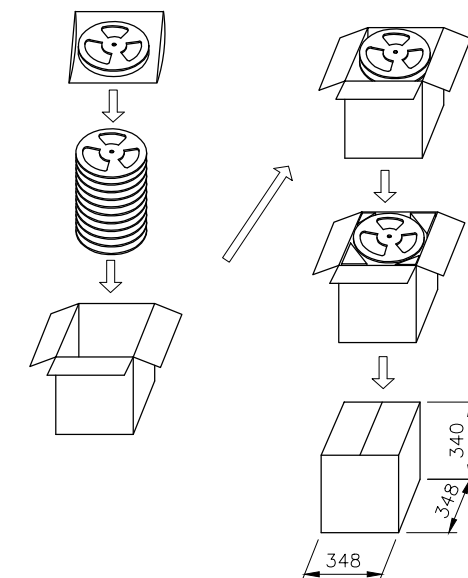

PACKAGING PROCESS

12.5 KG	9.13 KG	1200	10	12000	2041517-1
GROSS WEIGHT	NET WEIGHT	PCS /REEL	REELS /BOX	QUANTITY	PART NUMBER

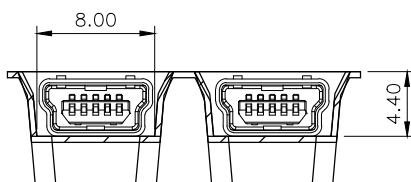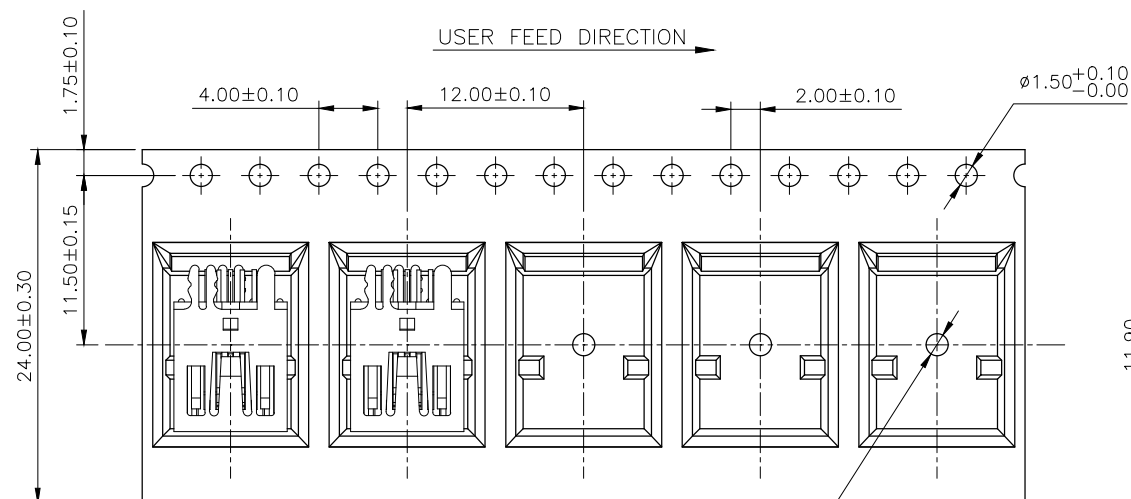

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

± -

± 0.30

± 0.30

± 0.30

± -

± -

± -

± -

± -

TE Connectivity

TE Connectivity

NAME

MINI USB CONNECTOR, RECEPTACLE
VERTICAL, DIP, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=2041517

SCALE

SHEET

2 OF 3

REV

A1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

ALL RIGHTS RESERVED.



COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.


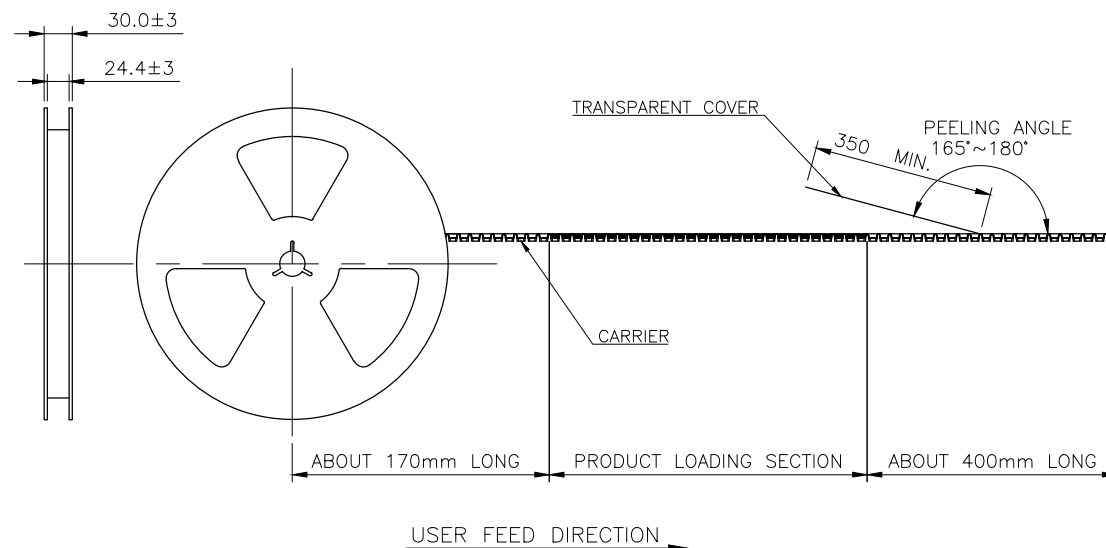


NOTE:

1. MATERIAL:
COVER TAPE: PET, WHITE COLOR.
CARRIER TAPE: PS.
REEL: PS.
SHIPPING BOX: CORRUGATED FIBER.
2. DIMENSION:
REEL: SEE DRAWING.
SHIPPING BOX: SEE DRAWING.
3. QUANTITY: SEE TABLE.
4. WEIGHT: SEE TABLE.
5. PEELING RESISTANCE: 10gf ~ 130gf
6. PEELING SPEED: 300mm/MINUTE.

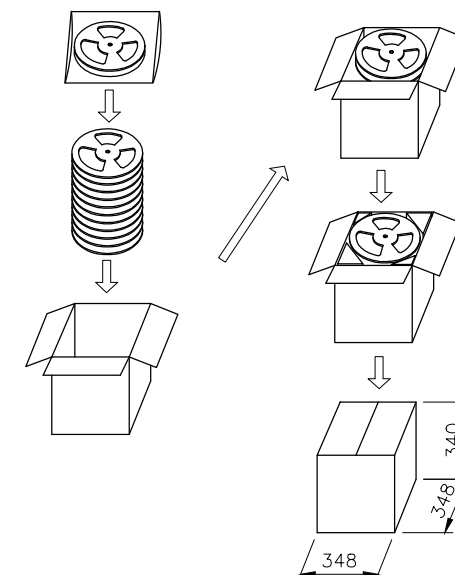


PACKAGING PROCESS

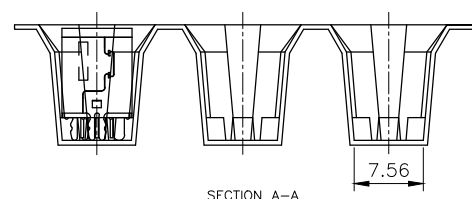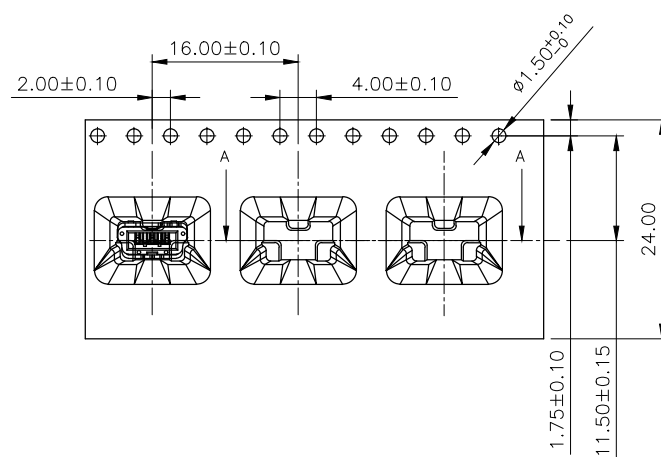

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± -
1. PLC	± 0.30
2. PLC	± 0.30
3. PLC	± 0.30
4. PLC	± -
ANGLES	± -

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

MINI USB CONNECTOR, RECEPTACLE
VERTICAL, DIP, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=2041517

SCALE

SHEET

3 of 3

REV

A1