


AFCI PART NO.

10131781-R0024YYLF

WIRING LIST			
COLOR	X2701	CN2	
BLACK	1	2	TWIST
GRAY	2	4	
BLACK	3	3	TWIST
GRAY	4	5	

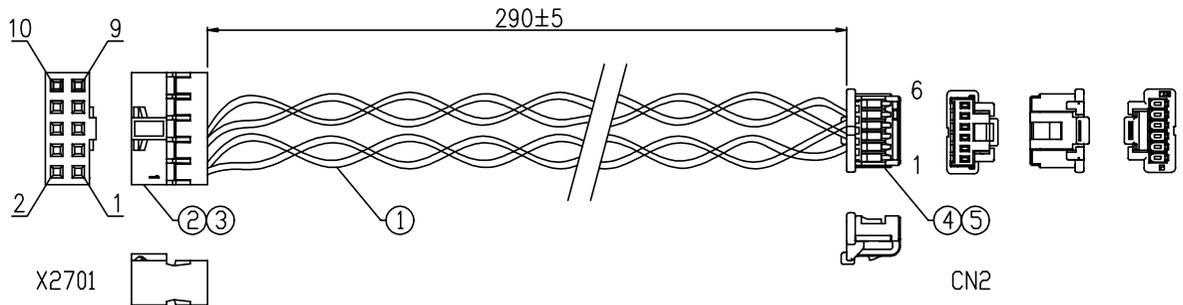

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:
HI-POT TESTED: DC 300V/10ms
DIELECTRIC RESISTANCE: 10M Ohms MIN.
CONNECTION RESISTANCE: 3 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
6. PACKAGE: LABEL SHOULD BE PRINTED WITH BLACK TEXT AS SHOW BELOW. PUT THE LABEL ON THE PACKAGE BAG AND BOX.



---BARCODE READS 'yywwFCIN'
'N' STANDS FOR NANTONG CITY

4	EA	TERMINAL: MOLEX P/N:501334-0000	5
1	EA	HOUSING: 1.0PITCH, 6PIN, COLOR:WHITE, MOLEX P/N:501330-0600	4
4	EA	TERMINAL: AFCI P/N:77138-101LF	3
1	EA	HOUSING: 2.0PITCH, 2*5PIN, COLOR:BLACK, AFCI P/N:90311-010LF	2
A/R	M	FLEXIBLE LITZ WIRE: AWG30, UL1061, BLACK/GRAY	1
Q'TY	UNIT	DESCRIPTION	ITEM

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family	
		ISO 1302		ISO 406 ISO 1101		Cable Assembly		Cable Assembly	
ltr	ecn no	dr	date	tolerances unless otherwise specified		title			
A	/	Carl	11/14'14	angles	linear	CTW CABLE ASSEMBLY			
B	N-21146	Carl	06/16'15			MM			
C	N-22511	Carl	11/30'15			scale N/A			
D	N-23070	Carl	01/26'16	dr	Carl Wang	05/04'17		dwg no	
E	N-24607	Carl	07/29'16	enr	Carl Wang	05/04'17		sheet 1 of 1	
F	N-26899	Carl	05/04'17	chr	Tim Yao	05/04'17		size	
				appd	Tim Yao	05/04'17		A3	
sheet index		revision sheet		F 1		Amphenol FCI		10131781-R0024YYLF	
								Customer Drawing	