




- Rectangular caps
- Rocker-action pushbutton cap
- 12.5 mm x 10.1 mm; 18.65 mm x 10.1 mm; 25.0 mm x 10.1 mm
- h = 12.2 mm
- Material: ABS/polycarbonate
- Temp. Range:
 - Solid cap: -40/+65°C
 - Transparent cap: -40/+85°C
- Panel cut-out: 1A/1H-13.0 x 10.5, 1M-25.7 x 10.5, 1ZA-19.4x10.5

All dimensions in mm


Tolerances +/-0.2mm

DIMENSIONS


SMD w/LED + 1A




TH w/LED + 1H



TH + 1ZA



SMD + 1M

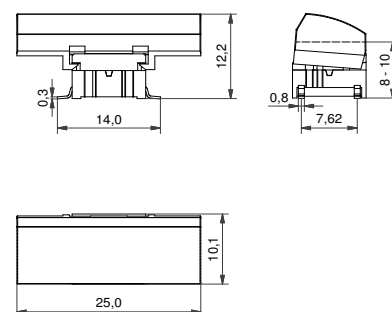

ILLUMINATED – HOW TO ORDER

Switch	Mounting	Actuation force	LED	+	Cap	Colour code 1H	Lens 1H
5 G	☐ ☐ ☐	☐ ☐	☐ ☐ ☐		☐ ☐	☐ ☐	☐
	TH9 through-hole	20	01 blue		1H	03 grey	1 transparent
	SH9 surface mount	35	22 green			09 black	2 green
		65	42 yellow		1A		4 yellow
		Q*	61 white			Colour code 1A	6 frosted white
			82 red			16 frosted white	8 red
			2242 green/yellow				
			8222 red/green				
			8242 red/yellow				

*For an illuminated quiet 2.0N switch add Q to the end of the switch part number.

NON-ILLUMINATED – HOW TO ORDER

Switch	Mounting	Actuation force	+	Cap	Colour code 1A/1M	Colours 1ZA:
5 G	☐ ☐ ☐	☐ ☐		☐ ☐ ☐	☐ ☐	
	TH9 through-hole	20		1A	00 blue	03 grey
	SH9 surface mount	20Q			02 green	06 white
		35		1ZA	03 grey	09 black
		65			04 yellow	30 ultra blue
				1M	06 white	40 dusty blue
					08 red	42 aqua blue
					09 black	50 metal dark blue
						53 metal light grey
						57 metal dark grey
						58 metal bordeaux

Ordering example:

5GSH93582 + 1H098 with illumination OR 5GTH965 + 1ZA57 without illumination OR *5GTH92001Q (illuminated quiet version).

Please see colour codes, updates of products and changes of specifications on www.mec.dk