

SPECIFICATION CONTROL DRAWING

2026H242A

CHEMINAX

120 OHM, AWG 26, 19 STRANDS OF AWG 38, TWINAXIAL CABLE

Date: 11-17-16
Revision: C


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES, UNLESS OTHERWISE DESIGNATED.

| | |
|--------------------------|---|
| CHARACTERISTIC IMPEDANCE | 120 ± 12 ohms, Method D at 1 MHz with shield grounded |
| MUTUAL CAPACITANCE | 12.7 pF/ft. (nominal) 18.2 pF/ft. (maximum) |
| VELOCITY OF PROPAGATION | 77% (nominal) |
| ATTENUATION | 1.1 dB/100 ft. (maximum) at 1 MHz 2.4 dB/100 ft. (maximum) at 6 MHz 3.1 dB/100 ft. (maximum) at 10 MHz 8.6 dB/100 ft. (maximum) at 100 MHz |

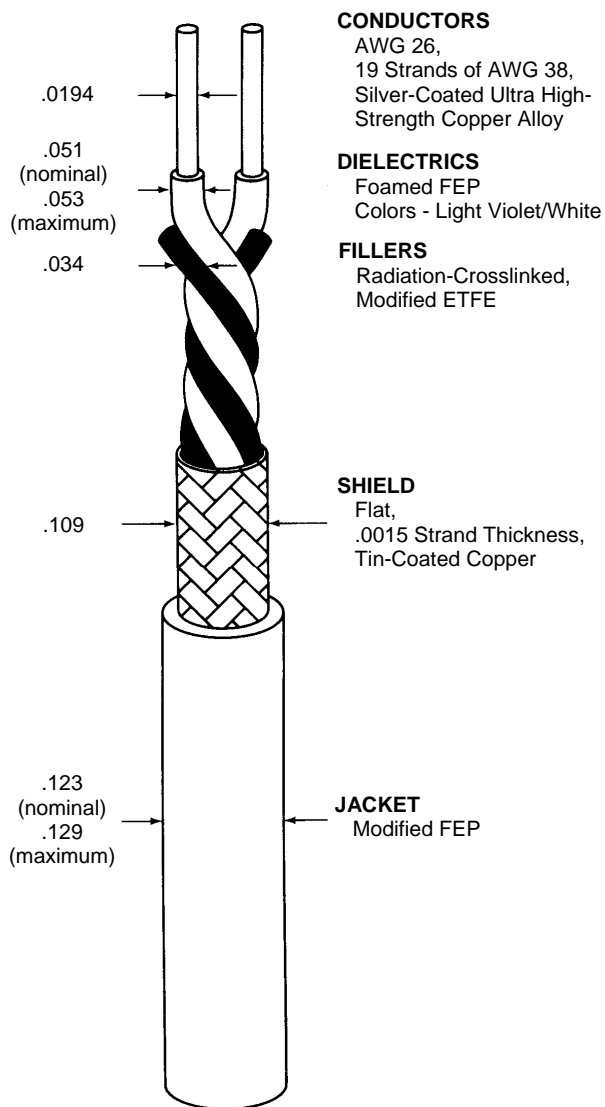

ADDITIONAL REQUIREMENTS

| | |
|--|---------------------------------------|
| ELECTRICAL | |
| CONDUCTOR RESISTANCE (prior to cabling) | 56.4 ohms/1000 ft. (nominal) |
| INSULATION RESISTANCE | 10,000 megohms (minimum) for 1000 ft. |
| JACKET FLAWS | |
| SPARK TEST | 1.0 kV (rms) |
| IMPULSE TEST | 6.0 kV (peak) |
| VOLTAGE WITHSTAND (DIELECTRIC) | 1500 volts (rms) (minimum) |
| ENVIRONMENTAL | |
| FLAMMABILITY | Method B |
| HEAT SHOCK | 225°C |
| LOW TEMPERATURE-COLD BEND | -55°C/3.50 inch mandrel |
| VOLTAGE WITHSTAND (Post Environmental) | 1000 volts (rms), 1 minute |
| PHYSICAL | |
| INSULATION (DIELECTRIC) (prior to cabling) | |
| ELONGATION | 50% (minimum) |
| TENSILE STRENGTH | 600 lbf/in ² (minimum) |
| JACKET | |
| ELONGATION | 200% (minimum) |
| TENSILE STRENGTH | 2000 lbf/in ² (minimum) |
| JACKET THICKNESS | .007 inch (nominal) |
| SHIELD COVERAGE | 92% (minimum) |
| WEIGHT | 11.1 lbs/1000 ft. (nominal) |

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Unless otherwise specified, outer jacket color will be translucent white designated by a "-9X" appended to the part number, (e.g. 2026H242A-9X). Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

| | |
|------------------------------|-----------------|
| ENGINEERING REFERENCE | |
| TEMPERATURE RATING | 150°C (maximum) |

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

