


# PIN RECEPTACLES

FOR .015" - .025" DIAMETER PINS

## 1802/3802/4030/8866

XXXX-0-15-XX-43-XX-04-0

Press-fit in .057 mounting hole

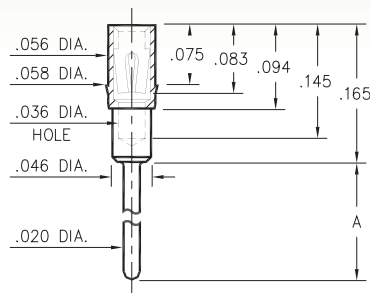


| Basic Part Number | Length A |
|-------------------|----------|
| 1802-0            | .125     |
| 3802-0            | .165     |
| 8866-0            | .775     |
| 4030-0            | .815     |

## 1803/1805/1808/3805

XXXX-0-15-XX-XX-XX-04-0

Press-fit in .057 mounting hole

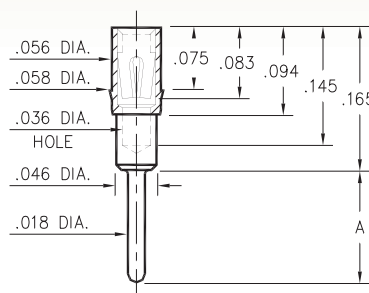


| Basic Part Number | Length A |
|-------------------|----------|
| 1808-0            | .100     |
| 1803-0            | .145     |
| 1805-0            | .213     |
| 3805-0            | .393     |

## 1804/1806

180X-0-15-XX-43-XX-04-0

Press-fit in .057 mounting hole

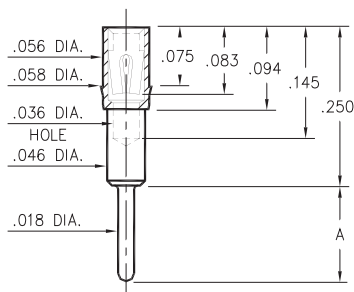


| Basic Part Number | Length A |
|-------------------|----------|
| 1804-0            | .080     |
| 1806-0            | .115     |

## 1807

1807-0-15-XX-43-XX-04-0


Press-fit in .057 mounting hole



## 8830

8830-15-XX-22-XX-10-0


Solder mount in .057 min. mounting hole



## 8363

8363-0-15-XX-35-XX-10-0


Solder mount in .057 min. mounting hole



## 4622

4622-0-15-XX-30-XX-10-0


Hex press-fit in .053 plated through-hole



## 6252

6252-0-15-XX-32-XX-10-0

Hex press-fit in .057 plated through-hole



### SPECIFICATIONS:

**Shell Material:** Brass Alloy 360, 1/2 Hard

**Contact Material:** Beryllium Copper Alloy 172, HT

**Dimensions:** Inches

**Tolerances On:** Lengths:  $\pm .005$

Diameters:  $\pm .002$

Angles:  $\pm 2^\circ$

RoHS-2  
2011/65/EU

ORDER CODE: XXXX - X - 15 - XX - XX - XX - XX - 0

BASIC PART #

SPECIFY SHELL FINISH:

- 01 200  $\mu$ " TIN/LEAD OVER NICKEL
- 80 200  $\mu$ " TIN OVER NICKEL (RoHS)
- 15 10  $\mu$ " GOLD OVER NICKEL (RoHS)

SPECIFY CONTACT FINISH:

- 02 100  $\mu$ " TIN/LEAD OVER NICKEL
- 84 100  $\mu$ " TIN OVER NICKEL (RoHS)
- 27 30  $\mu$ " GOLD OVER NICKEL (RoHS)

SELECT CONTACT:

#22, #30, #32 or #43 CONTACT (DATA ON PAGES 252, 253 & 254)

(For alternate contact choices, see groups B and C on page 248)



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com