

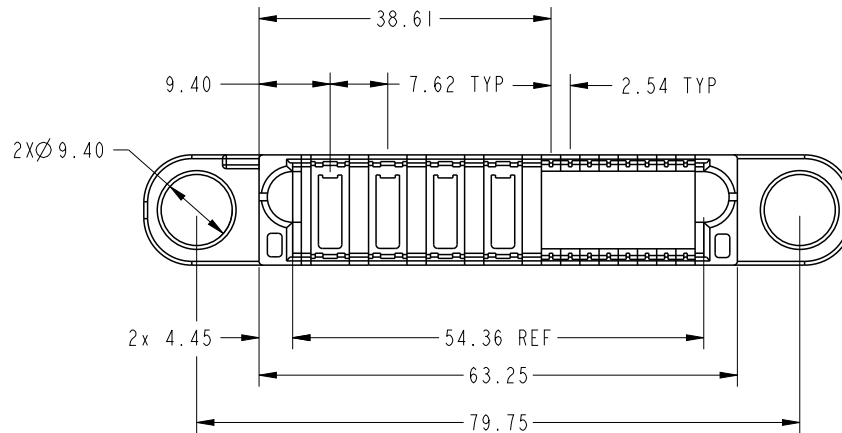
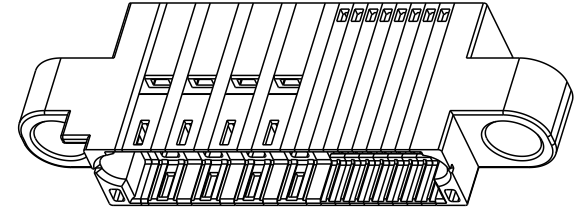



PART NUMBER	ROW	E	POWER				SIGNAL								E
			P1	P2	P3	P4	S1	S2	S3	S4	S5	S6	S7	S8	
10129413-035LF	D		PC	PC	PC	PC	X	X	X	X	X	S	S	X	
	C						X	X	X	X	X	S	S	X	
	B						X	S	S	S	S	S	X	X	
	A						X	S	S	S	S	S	S	X	

CONTACT WIRE TABLE	
CONTACT PITCH	WIRE GAUGE
7.62	8AWG
2.54	22~26AWG

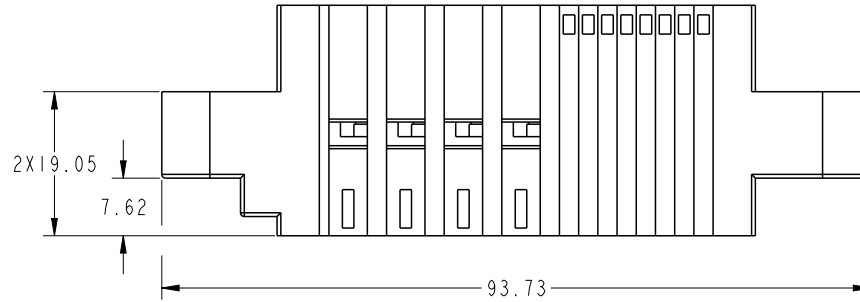

CONTACT TABLE	
CODE	DESCRIPTION
PC	STD POWER CONTACT
S	STD SIGNAL CONTACT
X	OMITTED

spec ref		*		dr	Sunny2 Liu	2017/04/28	projection 	MM 	size	A4	scale	1:1	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng			Sunny2 Liu	2017/05/12	ecn no -		
ISO 406						chr			Cheng-Ling Tao	2017/05/12			
ISO 1101						appr			Pei-Ming Zheng	2017/05/12	product family -		
surface 	linear	0.X	±0.5	Amphenol FCI	title 4ACP + 32S PMT PwrBlade+ Cable Plug Housing				dwg no	10129413-035		rev A	
		0.XX	±0.25										
		0.XXX	±0.10		cat. no. -	Product - Customer Drw							sheet 1 of 2
ISO 1302	angular	0°	±2°										

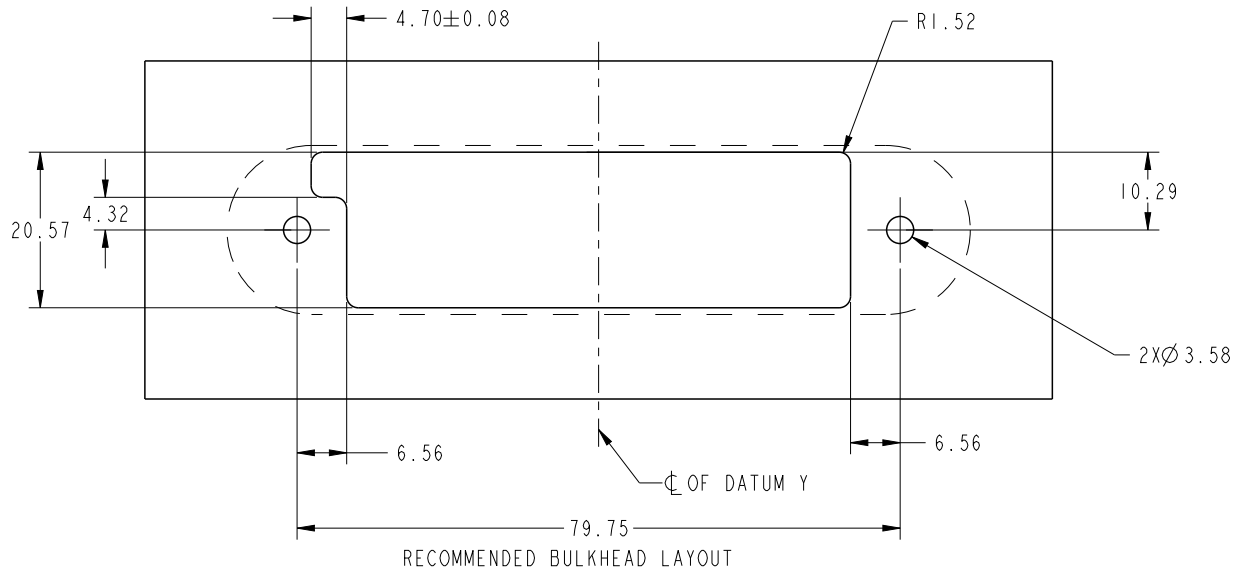

NOTE:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ISO 406&ISO 1101 UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: HIGH TEMPERATURE THERMOPLASTIC UL94 V-0.
3. BULKHEAD THICKNESS RANGE: 0.79 - 2.54
4. APPLICABLE COMPONENTS
 - a) APPLICABLE POWER CRIMP CONTACT: 10134849-*
 - b) APPLICABLE CONTACT SECONDARY LOCK: 10073097-DGC004LF
 - c) APPLICABLE SIGNAL CONTACT: 76808-DGC***LF
 - d) APPLICABLE SIGNAL CONTACT IMLA: 10097392-DGC001LF (USAGE OF IMLA: SIGNAL PIN=1:4)
5. PRODUCT SPEC: GS-12-1267
6. APPLICATION SPEC:GS-20-0435

spec ref		*		dr	Sunny2 Liu	2017/04/28	projection 	MM 	size	A4	scale	1:1	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Sunny2 Liu	2017/05/12			ecn no	-			
ISO 406 ISO 1101				chr	Cheng-Ling Tao	2017/05/12							
				appr	Pei-Ming Zheng	2017/05/12	product family			-	rel level		Released
surface 	linear	0.X	±0.5	Amphenol FCi	title 4ACP + 32S PMT PwrBlade+ Cable Plug Housing			dwg no	10129413-035			rev A	
		0.XX	±0.25										
		0.XXX	±0.10										
ISO 1302	angular	0°	±2°		cat. no.			-	Product - Customer Drw			sheet 2 of 2	