
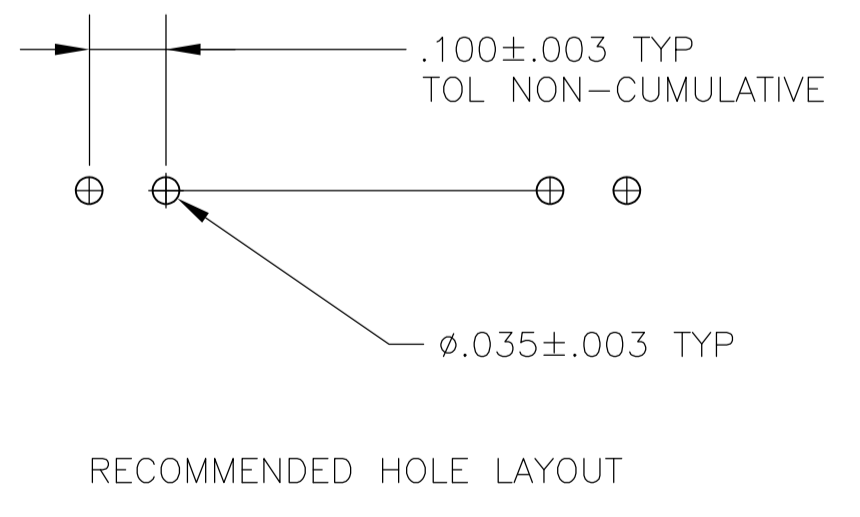


LOC		DIST		REVISIONS				
AD	00	REV	PER	DESCRIPTION	DATE	OWN	APVD	
J		REVISED	PER	ECO-14-000068	26APR2014	NK	MM	

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PARTS PACKAGED IN GPAX
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

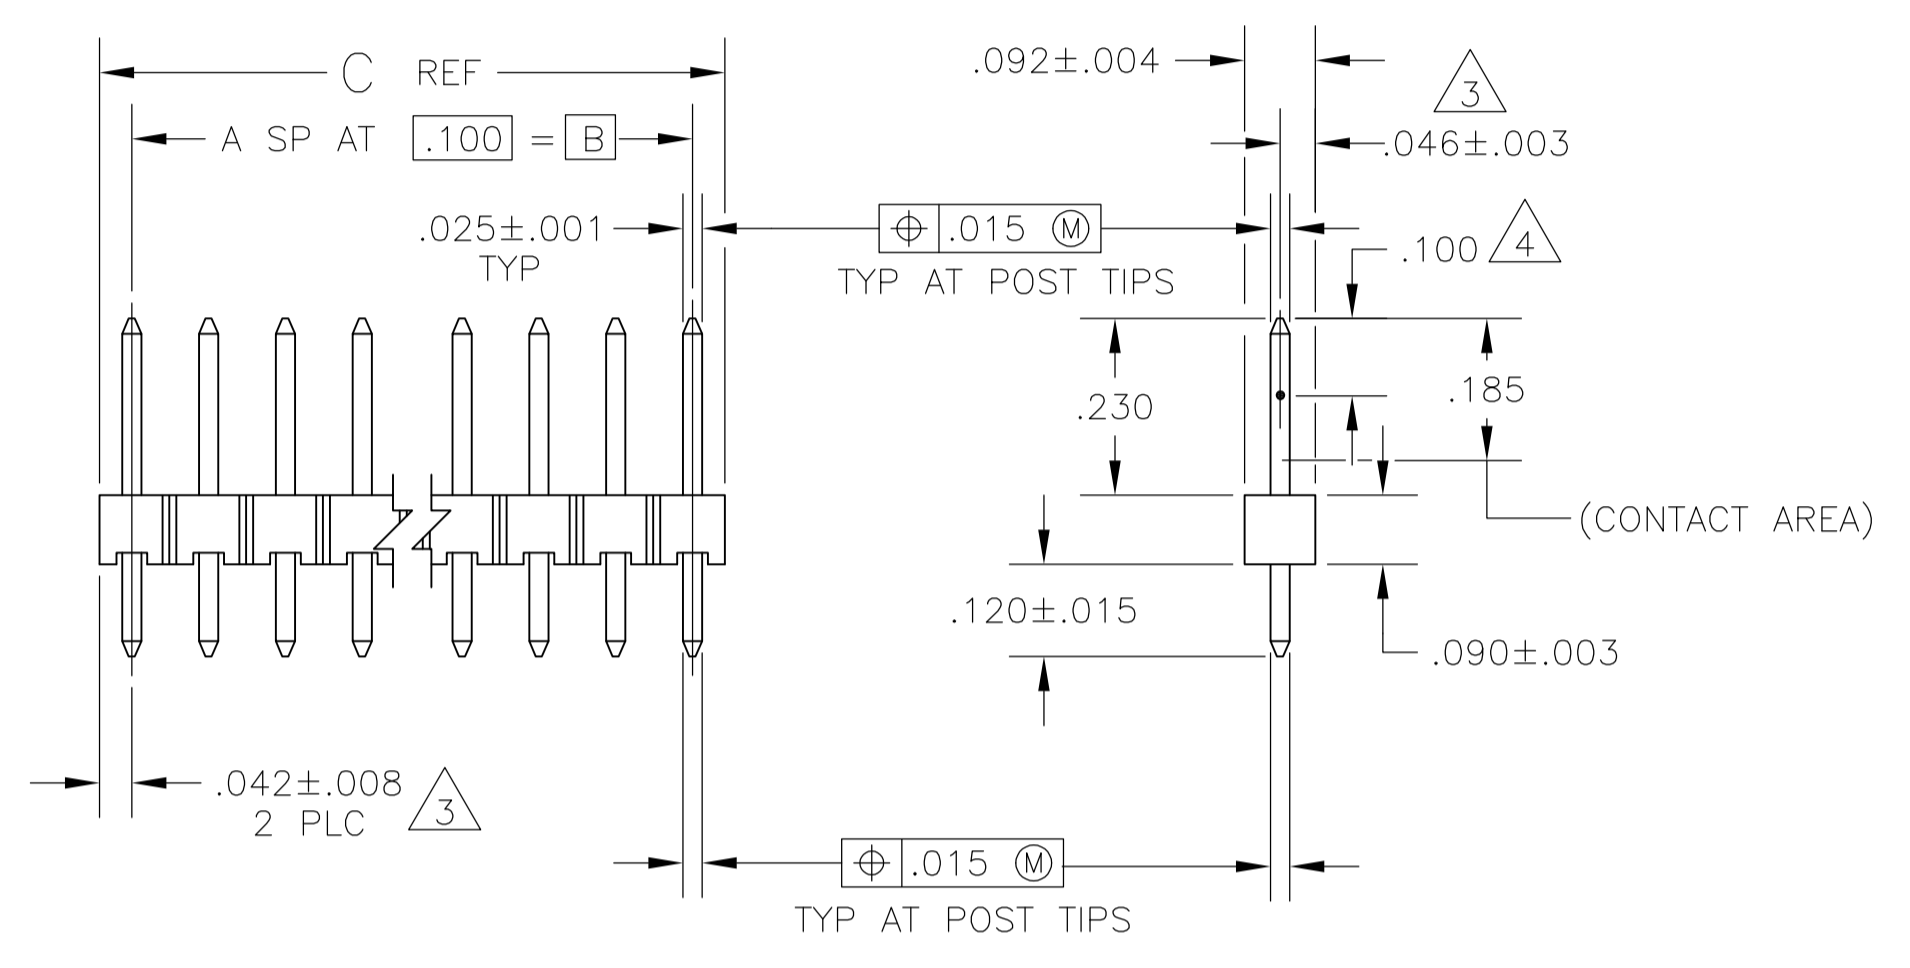

6	5	6	OB	SO	LE	TE	NO	OF	P	OS	NO	OF	POS	NO	OF	REV
3.984	3.900	39	40	4-103239-0												
3.884	3.800	38	39	3-103239-9												
3.784	3.700	37	38	3-103239-8												
3.684	3.600	36	37	3-103239-7												
3.584	3.500	35	36	3-103239-6												
3.484	3.400	34	35	3-103239-5												
3.384	3.300	33	34	3-103239-4												
3.284	3.200	32	33	3-103239-3												
3.184	3.100	31	32	3-103239-2												
3.084	3.000	30	31	3-103239-1												
2.984	2.900	29	30	3-103239-0												
2.884	2.800	28	29	2-103239-9												
2.784	2.700	27	28	2-103239-8												
2.684	2.600	26	27	2-103239-7												
2.584	2.500	25	26	2-103239-6												
2.484	2.400	24	25	2-103239-5												
2.384	2.300	23	24	2-103239-4												
2.284	2.200	22	23	2-103239-3												
2.184	2.100	21	22	2-103239-2												
2.084	2.000	20	21	2-103239-1												
1.984	1.900	19	20	2-103239-0												
1.884	1.800	18	19	1-103239-9												
1.784	1.700	17	18	1-103239-8												
1.684	1.600	16	17	1-103239-7												
1.584	1.500	15	16	1-103239-6												
1.484	1.400	14	15	1-103239-5												
1.384	1.300	13	14	1-103239-4												
1.284	1.200	12	13	1-103239-3												
1.184	1.100	11	12	1-103239-2												
1.084	1.000	10	11	1-103239-1												
.984	.900	9	10	1-103239-0												
.884	.800	8	9	103239-9												
.784	.700	7	8	103239-8												
.684	.600	6	7	103239-7												
.584	.500	5	6	103239-6												
.484	.400	4	5	103239-5												
.384	.300	3	4	103239-4												
.284	.200	2	3	103239-3												
.184	.100	1	2	103239-2												
.084	—	—	1	103239-1												
C	B	A	NO OF POSN	PART NUMBER												

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H MOLL 13OCT87	STE TE Connectivity
0 PLC ± -	1 PLC ± -	CHK T. CLARK 20OCT87	NAME
2 PLC ± -	3 PLC ± .005	APVD T. CLARK 20OCT87	PRODUCT SPEC
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE
MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY	FINISH: POSTS: .00020 GOLD ON CONTACT AREA .00010-00005 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00020 NICKEL	WEIGHT: —	RESTRICTED TO
RESTRICTED CUSTOMER		SCALE: 4:1	SHEET 1 OF 1 REV J

HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS

00779 © 103239