THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
-	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REV PER ECO 10-023341	11-16-10	CT	KH

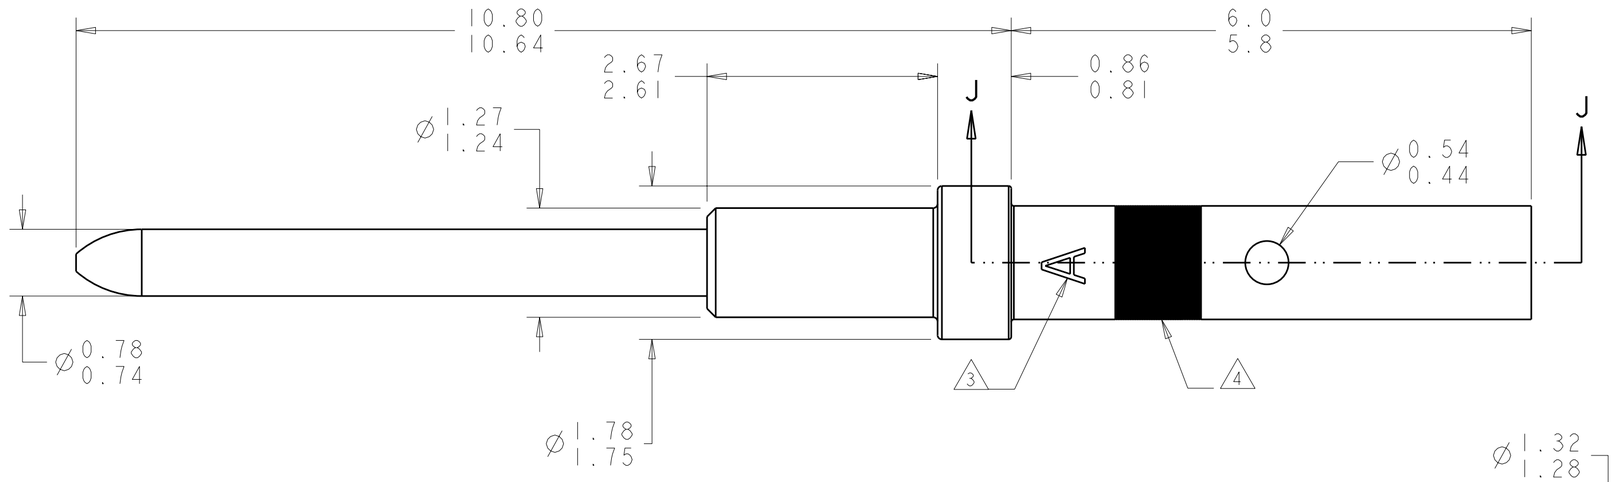

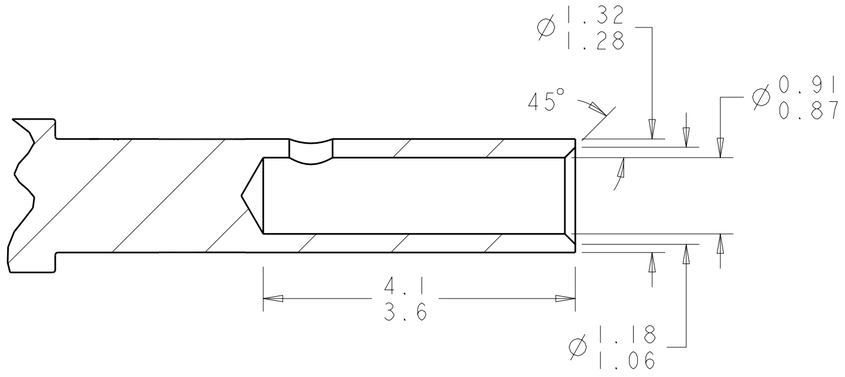

SECTION J-J

1. COPPER ALLOY C97
2. 1.27µm MIN GOLD PER ASTM B488 OVER 2.54µm MIN NICKEL PER QQ-N-290 ON ENTIRE STOCK.
3. OPTIONAL ALTERNATE MARKING: LETTER "S"
4. GREEN COLOR BAND.

5. APPLICABLE WIRE SIZE: 22-24-26 AWG
   WIRE INSULATION DIAMETER: 1.4 MAX
   INSULATION STRIP LENGTH: 3.08-3.58

6. APPLICATION TOOLING:
   CRIMPING TOOL: TYCO PART NUMBER 601966-1 (M22520/2-01)
   POSITIONER: TYCO PART NUMBER 601966-8 (M22520/2-23)
   SELECTOR POSITION: AWG 22: 4
   AWG 24: 3
   AWG 26: 3
   CONTACT INSERTION/EXTRCTION TOOL: 91066-1 (M81969/1-01)

7. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIALL SA.

1738007-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DWN	BH	12AUG2004
CHK	JPM	12AUG2004
APVD	JPM	12AUG2004
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

Tyco Electronics
Tyco Electronics
Harrisburg, PA 17105-3608

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±30'

MATERIAL 1

FINISH 2 -

NAME PIN CONTACT, SIZE 22, GPR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1738007	-

CUSTOMER DRAWING | SCALE 20:1 | SHEET 1 OF 1 | REV A