




Heyco-Flex™ VI Liquid Tight Conduit

Flexible, PVC/Metal Liquid Tight Electrical Conduit (LFMC)

- Constructed of PVC jacketed, continuously interlocked hot dipped zinc galvanized steel core for exceptional crush and corrosion resistance.
- Used with standard liquid-tight fittings (page 2-16) for easy installation.
- IP 67 Rated when installed with approved connectors.
- Durable, sunlight resistant and flame retardant thermoplastic PVC jacket that resists heat, oil, and chemical breakdown.
- Approved for both exposed and concealed locations, direct burial and in concrete.
- Approved as an equipment grounding conductor if the total grounding path is 6 ft. or less and the circuit conductors are protected by over 20 amps for 3/8" and 1/2" and 60 amps or less for 3/4" through 1-1/4".
- Suitable for use in hazardous locations per NEC Articles 501 Class I Div. 2, Article 502 Class II Div. 1 & 2, Article 503 Class III Div. 1 & 2.
- Complies with UL Standard 360 File No. E18917; CSA C22.2 File No. 158897; and NEC Article 350.
- DFARS Compliant

| TRADE SIZE | PART NO. Gray | DESCRIPTION | PART DIMENSIONS | | | | STANDARD COIL LENGTH ft/coil |
|------------|---------------|--------------|-----------------------|------|----------------------|------|---------------------------------|
| | | | A Outside Diameter | | B Inside Diameter | | |
| | | | in. | mm. | in. | mm. | |
| 3/8 | 8457 | HF6 3/8 LFMC | .70 | 17,8 | .49 | 12,5 | 100 |
| 1/2 | 8458 | HF6 1/2 LFMC | .83 | 21,1 | .63 | 16,1 | |
| 3/4 | 8459 | HF6 3/4 LFMC | 1.04 | 26,4 | .83 | 21,1 | |
| 1 | 8460 | HF6 1 LFMC | 1.30 | 33,1 | 1.04 | 26,4 | |

Standard color gray. Consult Heyco for black and other colors.

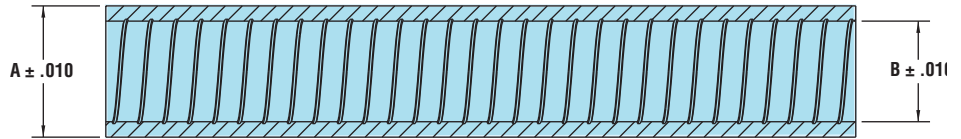

Quick Specs

| | |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Material | PVC jacket with zinc galvanized steel core |
| Certifications | Listed under the Component Program of Underwriters' Laboratories File E469210 Certified by Canadian Standards Association File 260992 |
| Temperature Range | -4°F (-20°C) to 140°F (60°C) |