

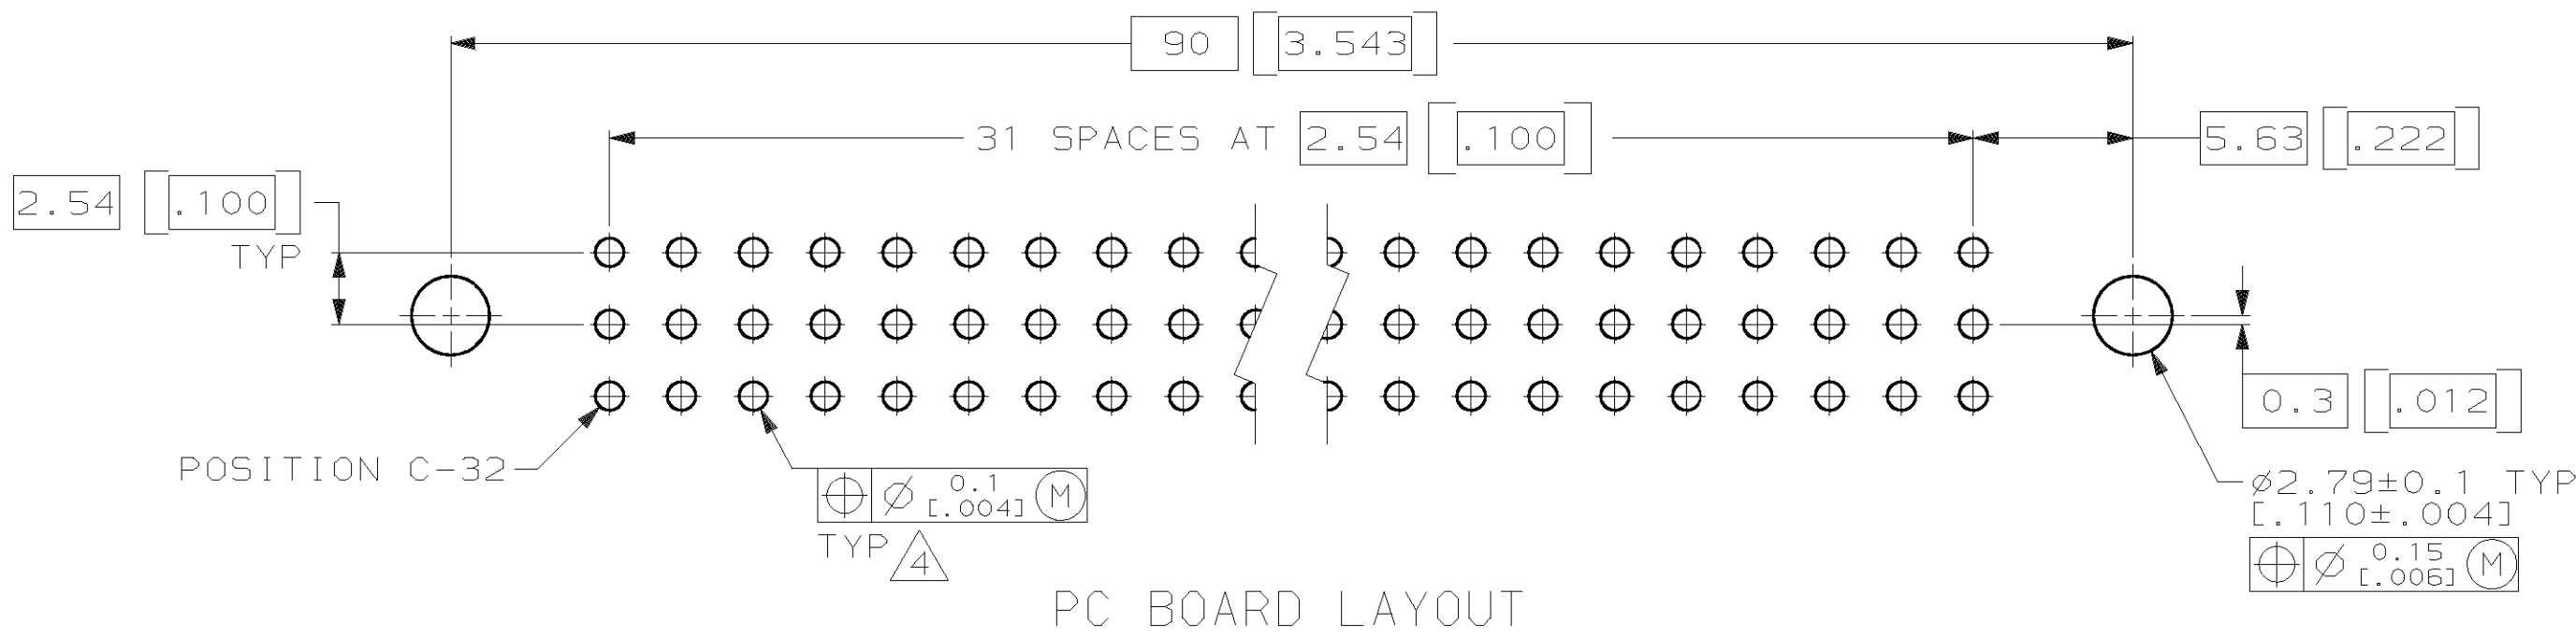
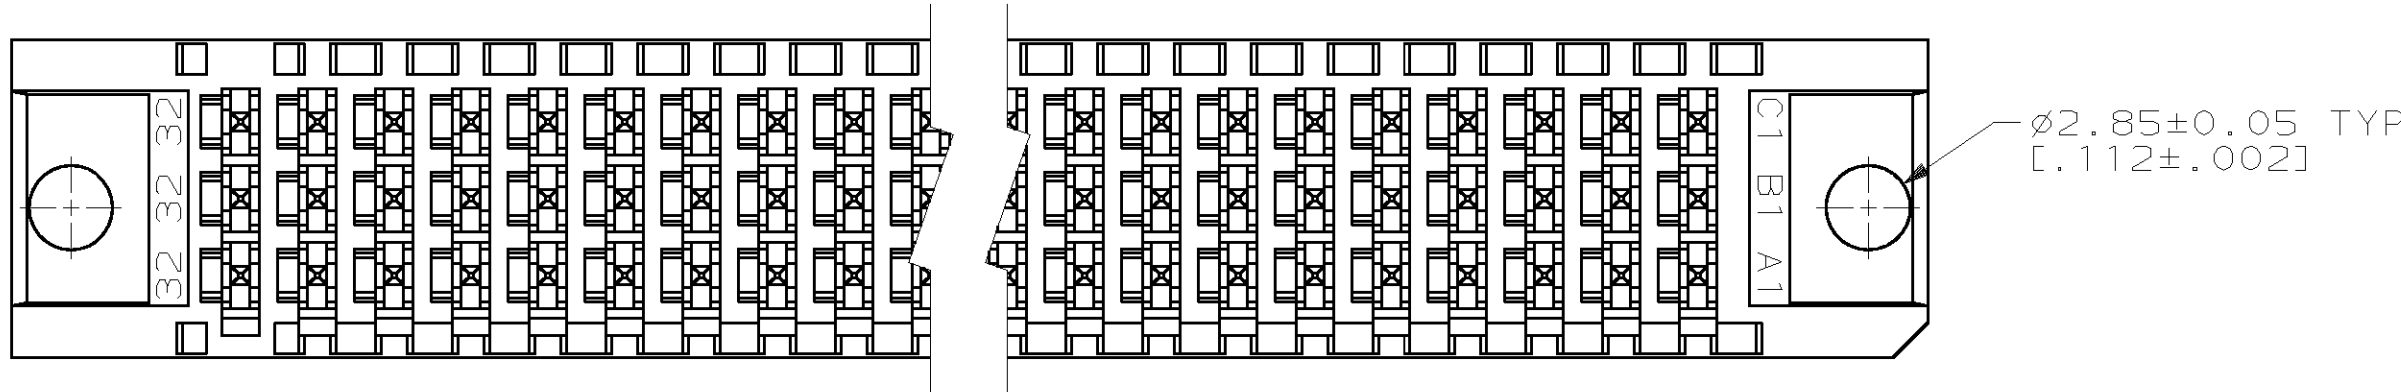
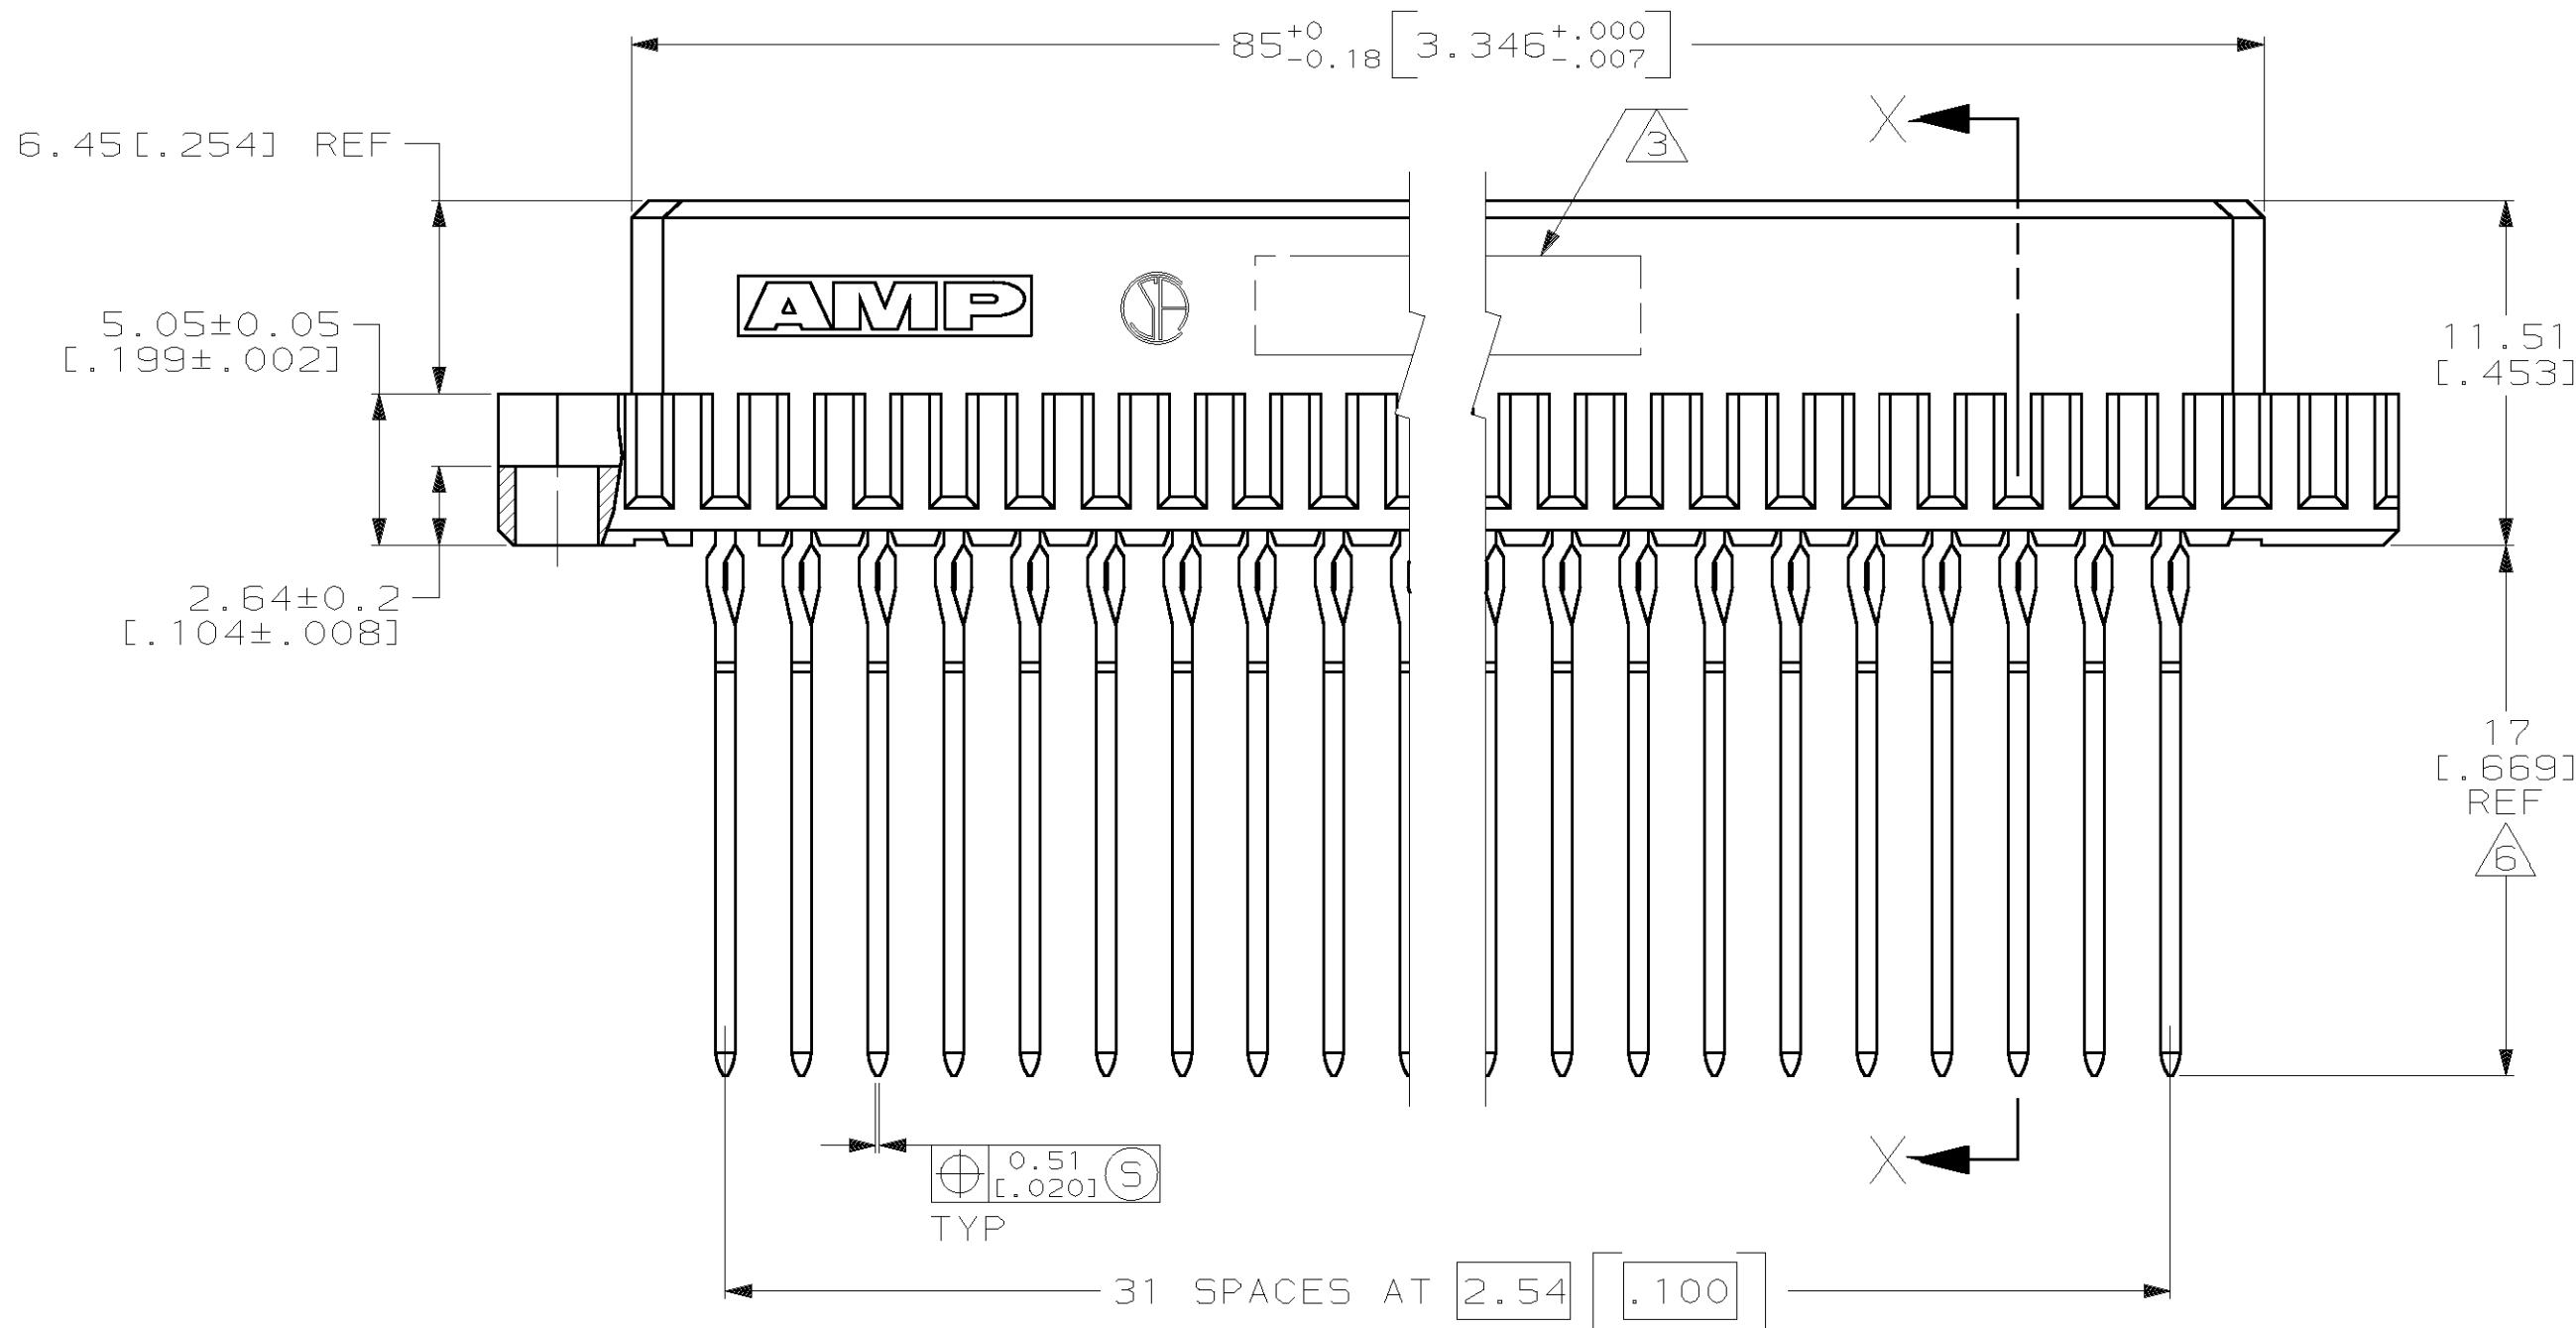


LOC	DIST	P	F	ZONE	LTR	REVISIONS	
AD	25					DESCRIPTION	DATE
					O	DRAWN	-
					A	EC 0010-1152-95	10/10/95
					B	REVISED PER 0503-0580-97	9-30-97
					C	PER EC 0620-0147-98	T.S. 6-4-98
					D	REV PER EC 0U1B-0136-99	06 OCT 99

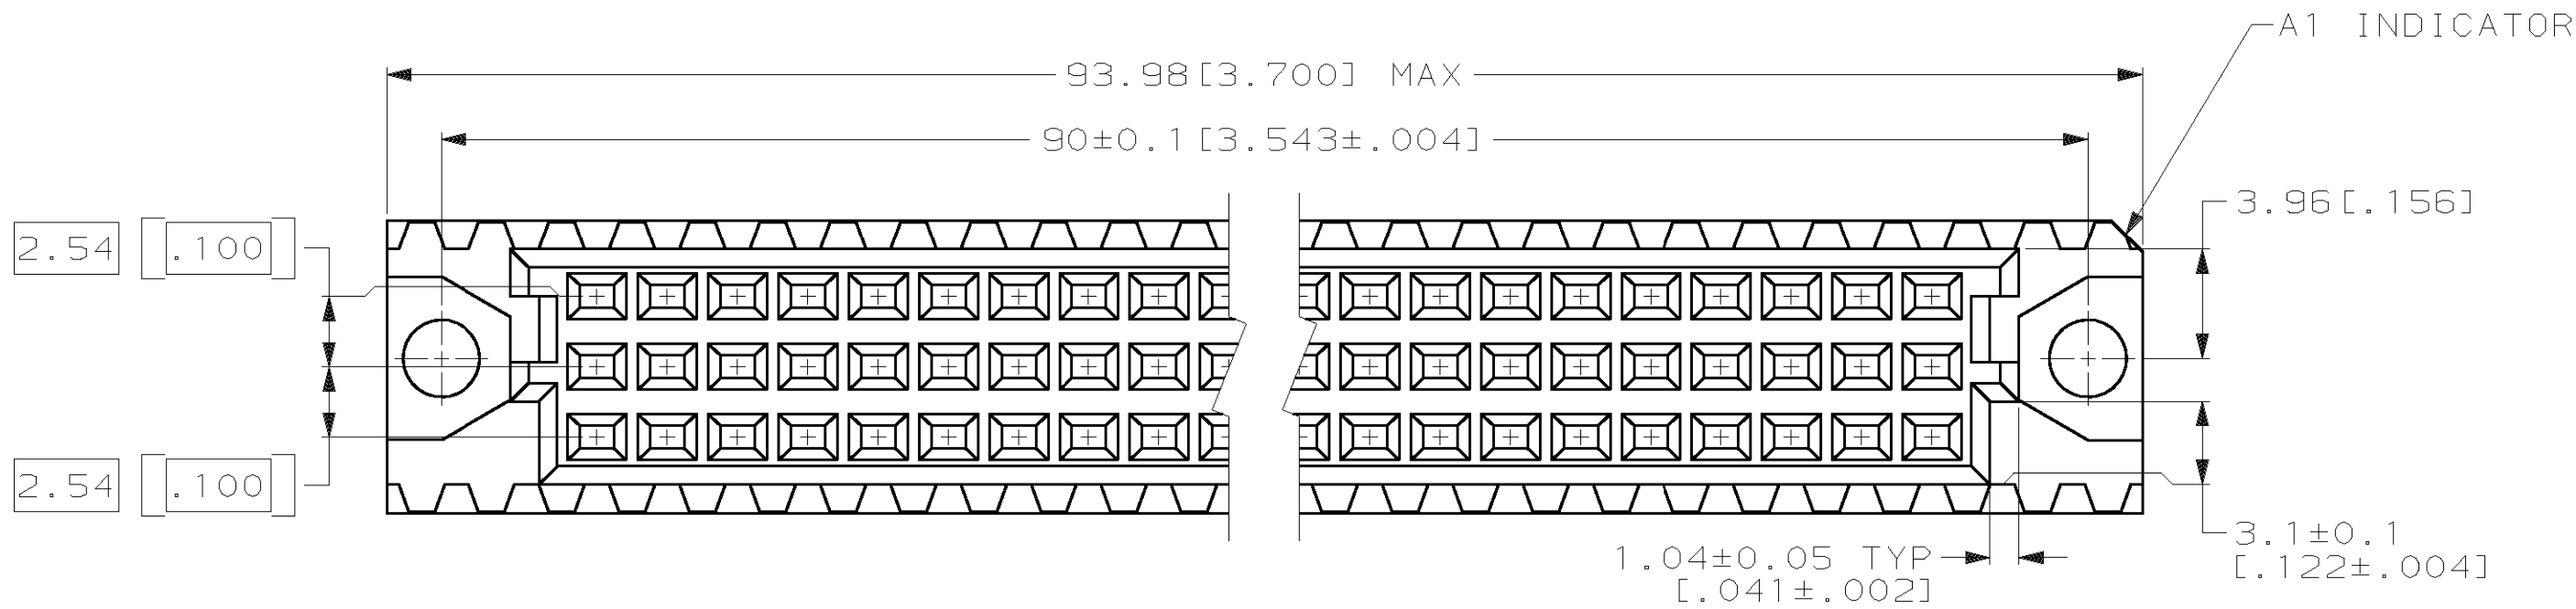

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ PART NUMBER AND DATE CODE HOT STAMPED IN THIS APPROXIMATE AREA.
- △ ACTION PIN POSTS REQUIRE 1.57 [0.062] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD DRILLED HOLES ARE 1.15±0.025 [0.0453±.0010] DIAMETER WITH 0.02-0.08 [0.001-.003] COPPER AND 0.008 [0.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING IS 1.02±0.08 [0.040±.002] DIAMETER.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD PLATE ON POSTS.
- △ TAIL LENGTH AFTER SEATING IN PC BOARD.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA AND LAST 5.08 [0.200] OF POST.
- △ CONTACT POINT AFTER SEATED IN PC BOARD.
- △ HOT STAMPING ON THIS SIDE.

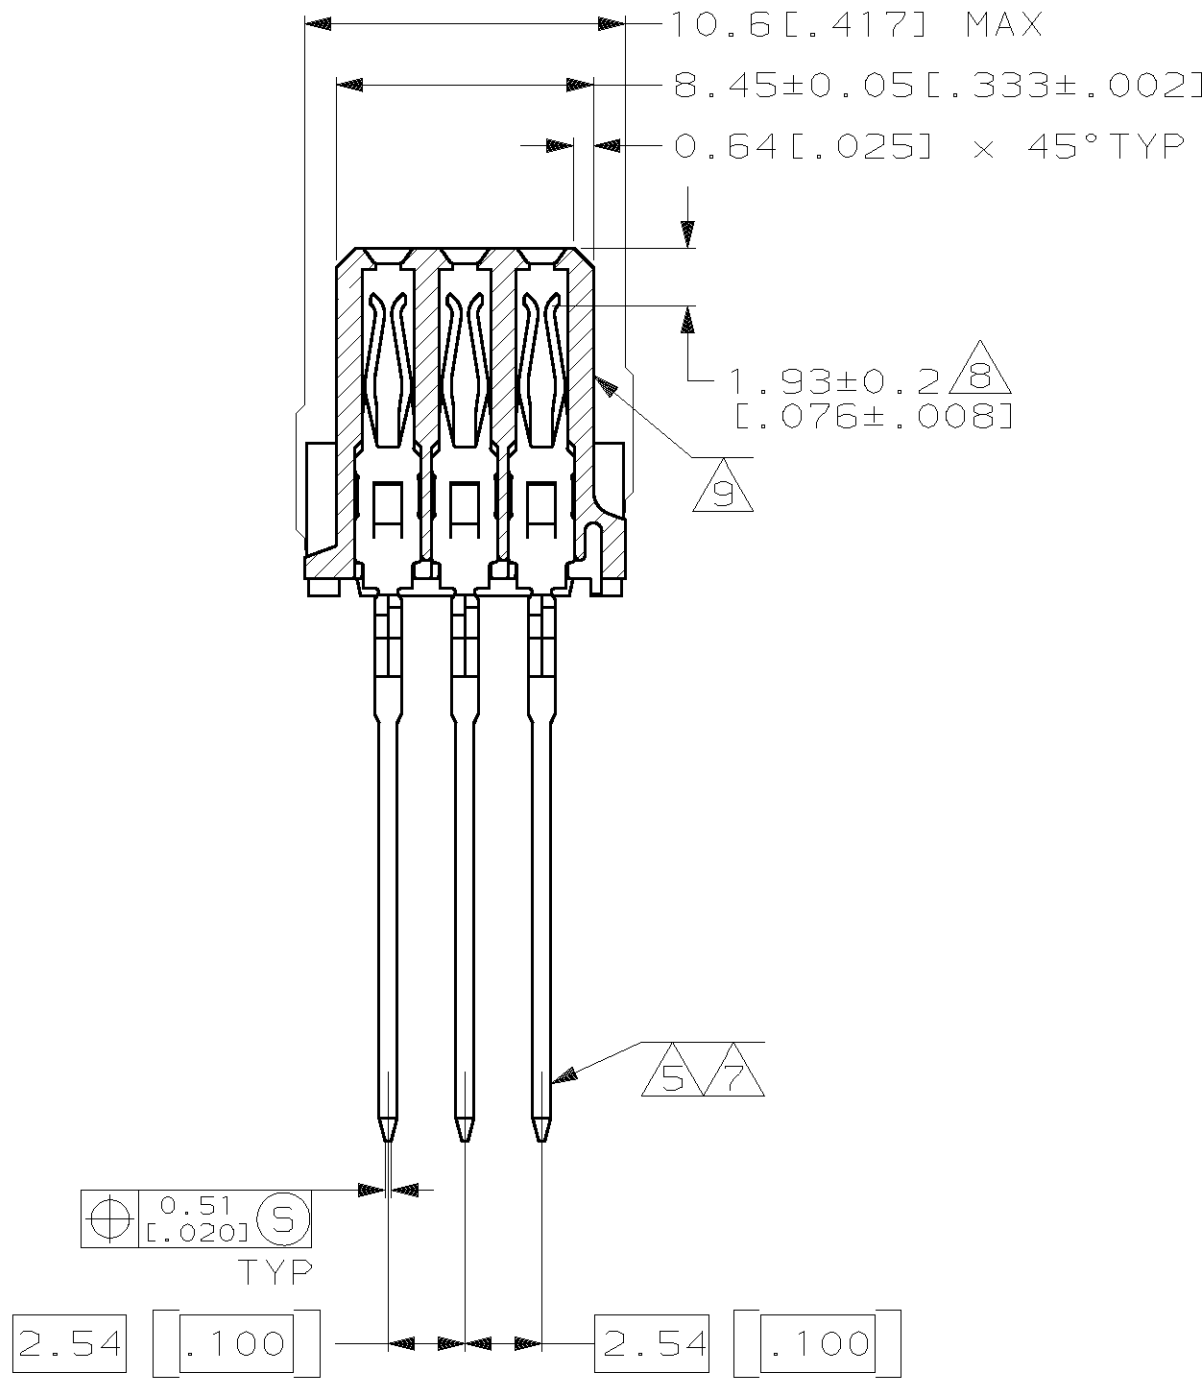

SECTION X-X

△	1-148059-5
△	148059-5
FINISH	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ±0.13 [0.005] 3 PLC DEC ±- ANGLES ±-		DR L. BRINER 7/26/94	AMP AMP Incorporated Harrisburg, PA 17105-3608		
CHK R. PATTERSON 8/9/94		APPD R. PATTERSON 8/9/94			
MATERIAL HOUSING: △ CONTACTS: △		APPD R. PATTERSON 8/9/94	NAME RECEPTACLE ASSEMBLY, EUROCARD, TYPE "C"		
FINISH CONTACTS: △		PRODUCT SPEC -	DRAWING NO C-148059		
		APPLICATION SPEC -	SIZE D	CAGE CODE 00779	SHEET 1 OF 1
		WEIGHT -	SCALE 4:1		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.