
[illegible]

Mating Cycles	500
Filter type	C
Capacitance	470pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GW

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

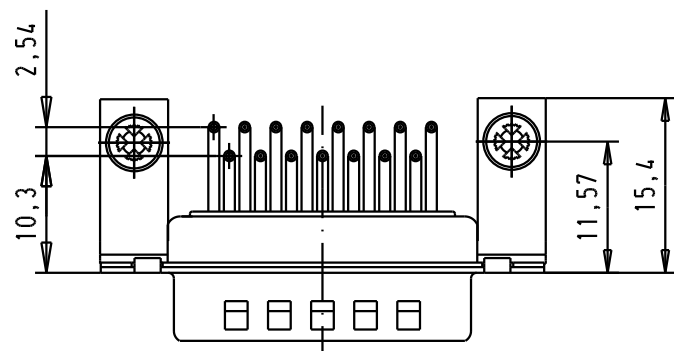

							Dat.	Name		D-Sub, male, angled, 15 Poles, turned solder pins, tin plated shell with dimples, brackets, board-locks and clinch nuts	Mo?Ms lab/ Scale 1.5:1
						Detail.	8-JUL-02	CV			
						Insp.					
						Stand.					
09642247223	M3		33269	21/11/05	JMDR	HARTING EURL F-95972 Paris				TB 0964224722x	Blatt/ Page 1 / 4
09642247222	UNC 4-40		31058	8-JUL-02	CV						
Part number	Nut thread		Mod.	Dat.	Name						