


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5016283791](#)
Status: **Active**
Overview: FFC-FPC (SMT)
Description: 0.30mm Pitch Easy-On™ Type FPC Connector, 0.90mm Mated Height, Right Angle, Surface Mount, Bottom Contact Style, 37 Circuits

Documents:

[3D Model](#) [Application Specification AS-501628-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-501628-001 \(PDF\)](#)

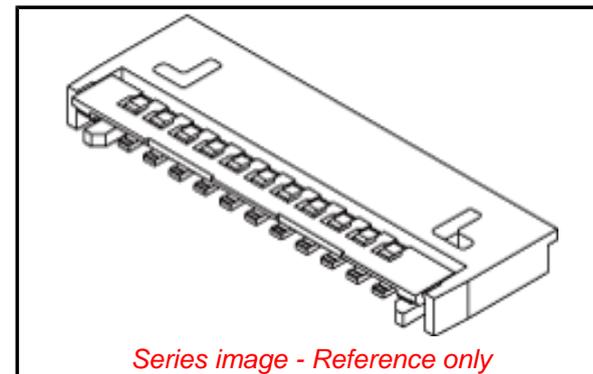

General

Product Family	FFC/FPC Connectors
Series	501628
Comments	FPC with tabs
Overview	FFC-FPC (SMT)
Product Name	Easy-On™
UPC	800756650432

Physical

Circuits (Loaded)	37
Contact Position	Bottom
Durability (mating cycles max)	10
Entry Angle	90° Angle
Mated Height	0.90mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Net Weight	75.732/mg
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.30mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-25°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FPC only

Electrical

Current - Maximum per Contact	0.2A
Voltage - Maximum	50V

Material Info

Reference - Drawing Numbers

Application Specification	AS-501628-001
Product Specification	PS-501628-001, RPS-501628-004
Sales Drawing	SD-501628-001, SD-501628-003

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contains SVHC(2015 June 15): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

[501628 Series](#)