


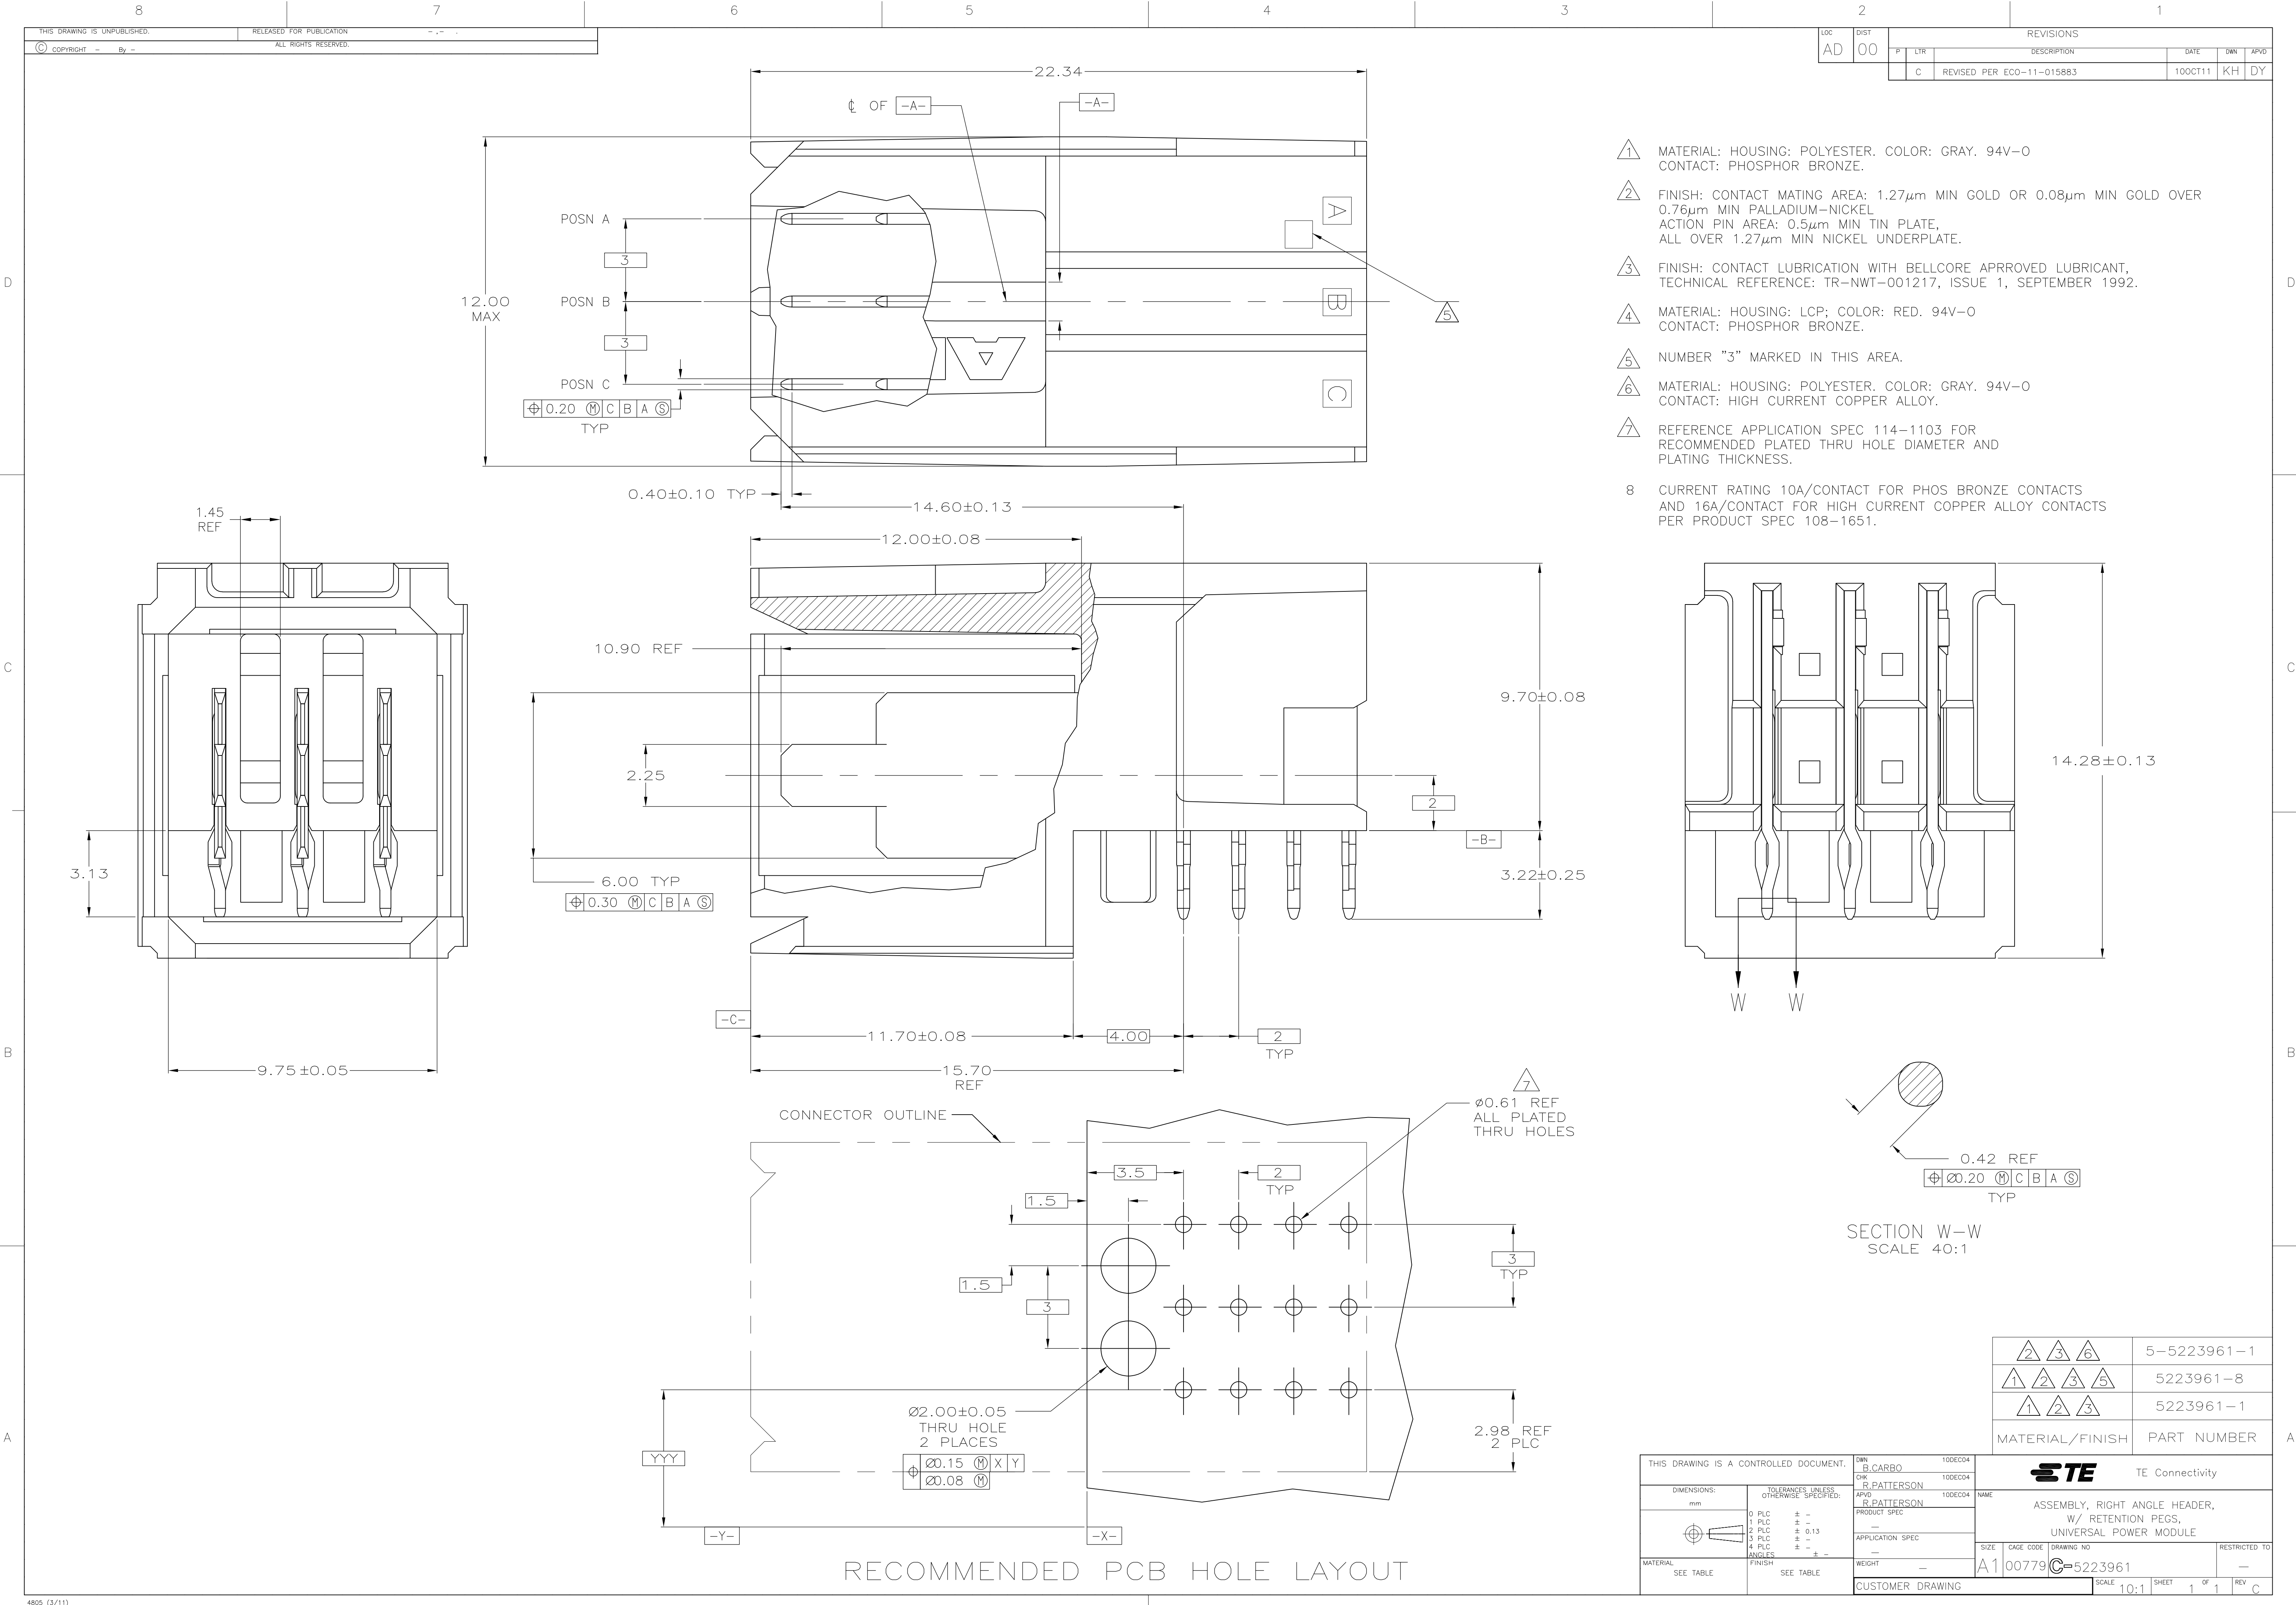

- 1 MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. 94V-0
CONTACT: PHOSPHOR BRONZE.
- 2 FINISH: CONTACT MATING AREA: 1.27µm MIN GOLD OR 0.08µm MIN GOLD OVER
0.76µm MIN PALLADIUM-NICKEL
ACTION PIN AREA: 0.5µm MIN TIN PLATE,
ALL OVER 1.27µm MIN NICKEL UNDERPLATE.
- 3 FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217, ISSUE 1, SEPTEMBER 1992.
- 4 MATERIAL: HOUSING: LCP; COLOR: RED. 94V-0
CONTACT: PHOSPHOR BRONZE.
- 5 NUMBER "3" MARKED IN THIS AREA.
- 6 MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. 94V-0
CONTACT: HIGH CURRENT COPPER ALLOY.
- 7 REFERENCE APPLICATION SPEC 114-1103 FOR
RECOMMENDED PLATED THRU HOLE DIAMETER AND
PLATING THICKNESS.
- 8 CURRENT RATING 10A/CONTACT FOR PHOS BRONZE CONTACTS
AND 16A/CONTACT FOR HIGH CURRENT COPPER ALLOY CONTACTS
PER PRODUCT SPEC 108-1651.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	10DEC04	REVISED PER ECO-11-015883		DATE 10OCT11	DWN KH	APVD DY
DIMENSIONS: mm		CHK R. PATTERSON	10DEC04	NAME		SIZE A1	CAGE CODE 00779	DRAWING NO 5223961
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD R. PATTERSON	10DEC04	PRODUCT SPEC		RESTRICTED TO	—	
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT —	CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV C