

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

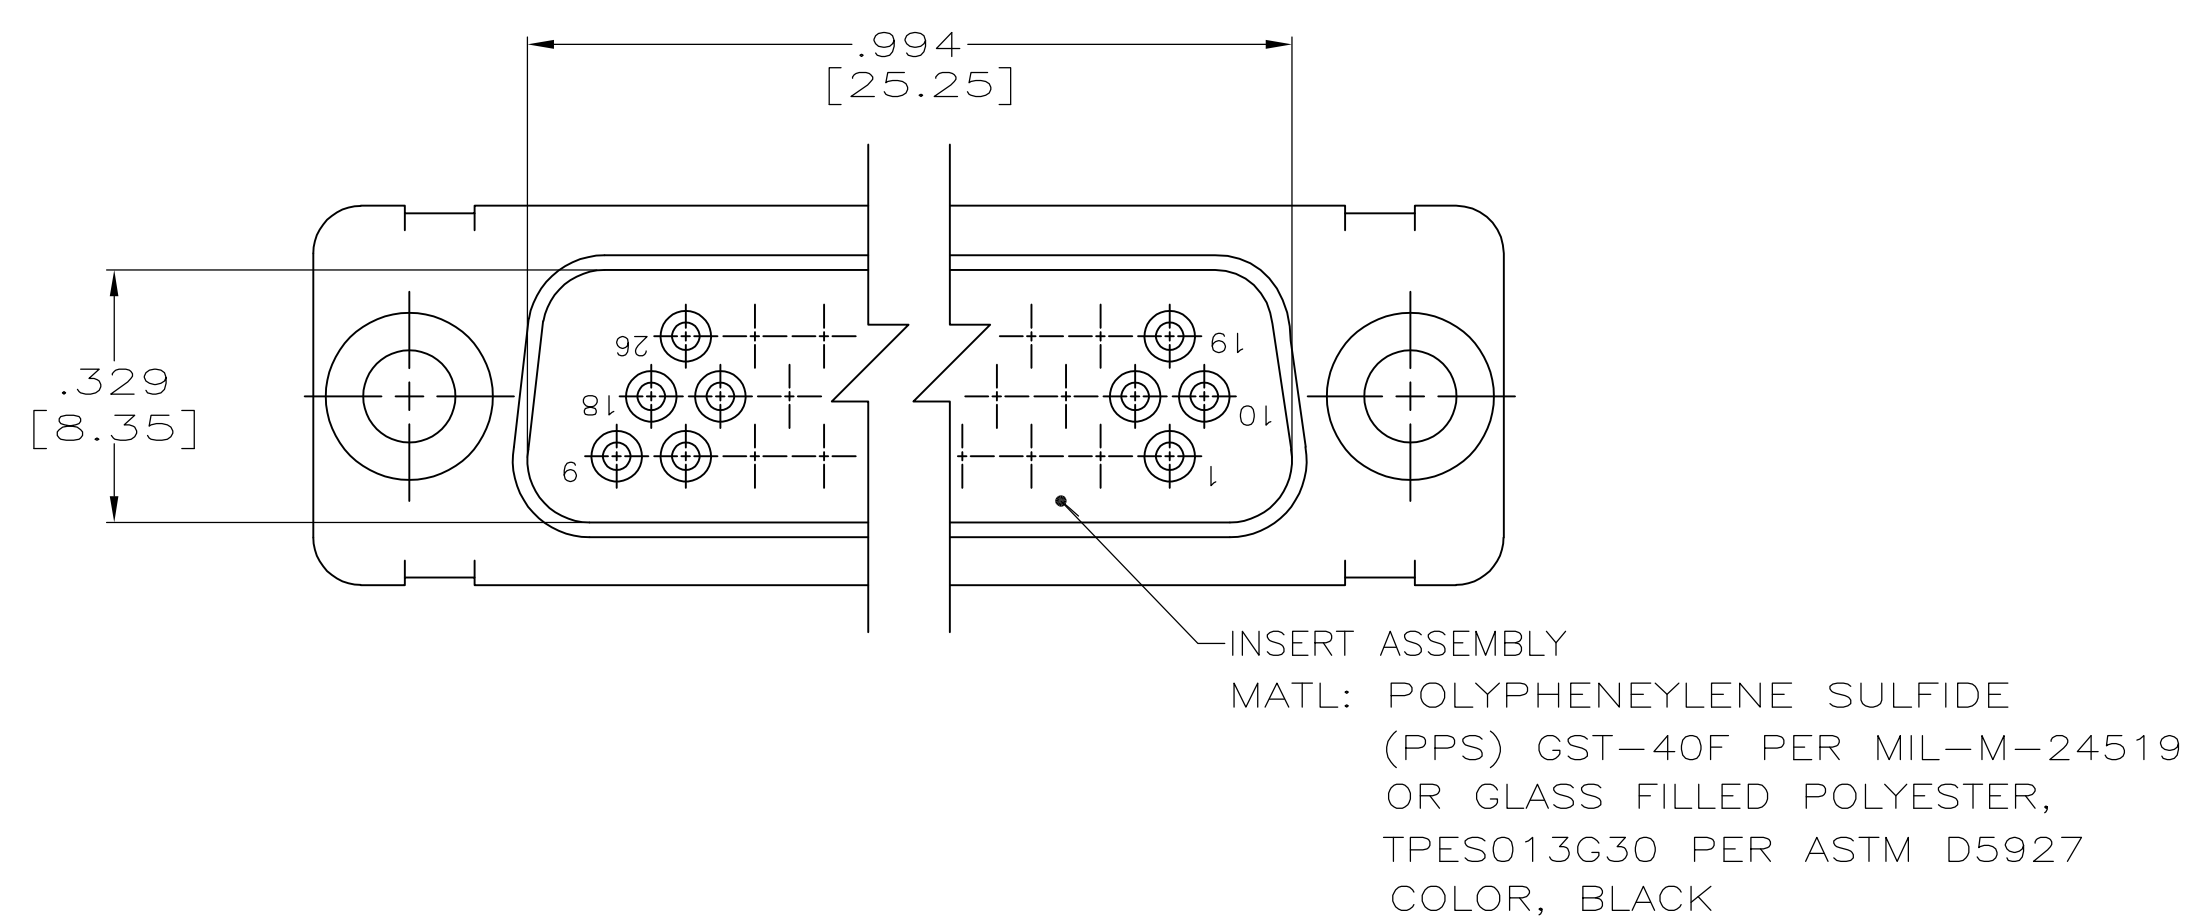
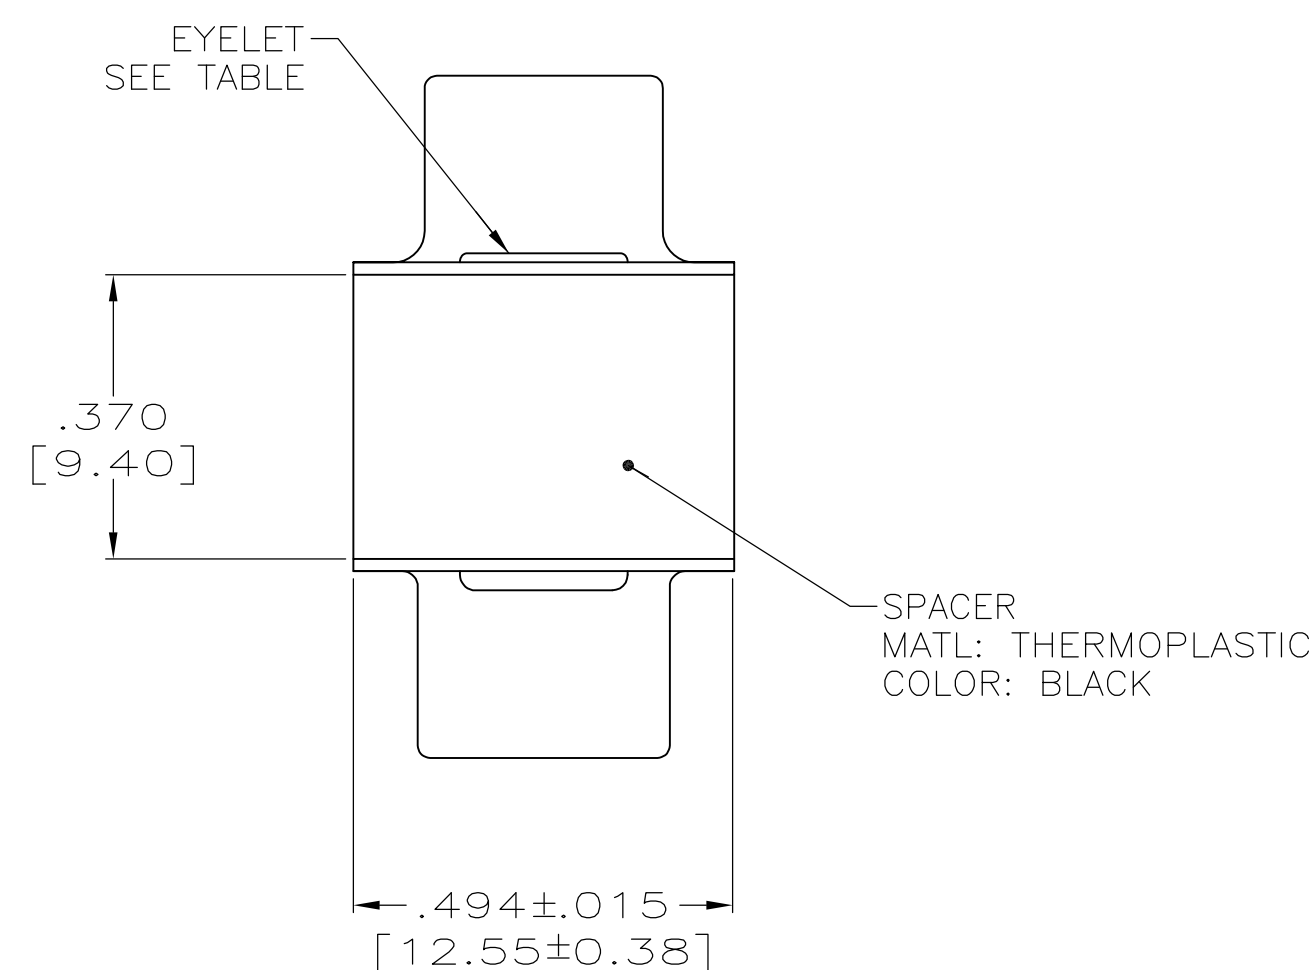
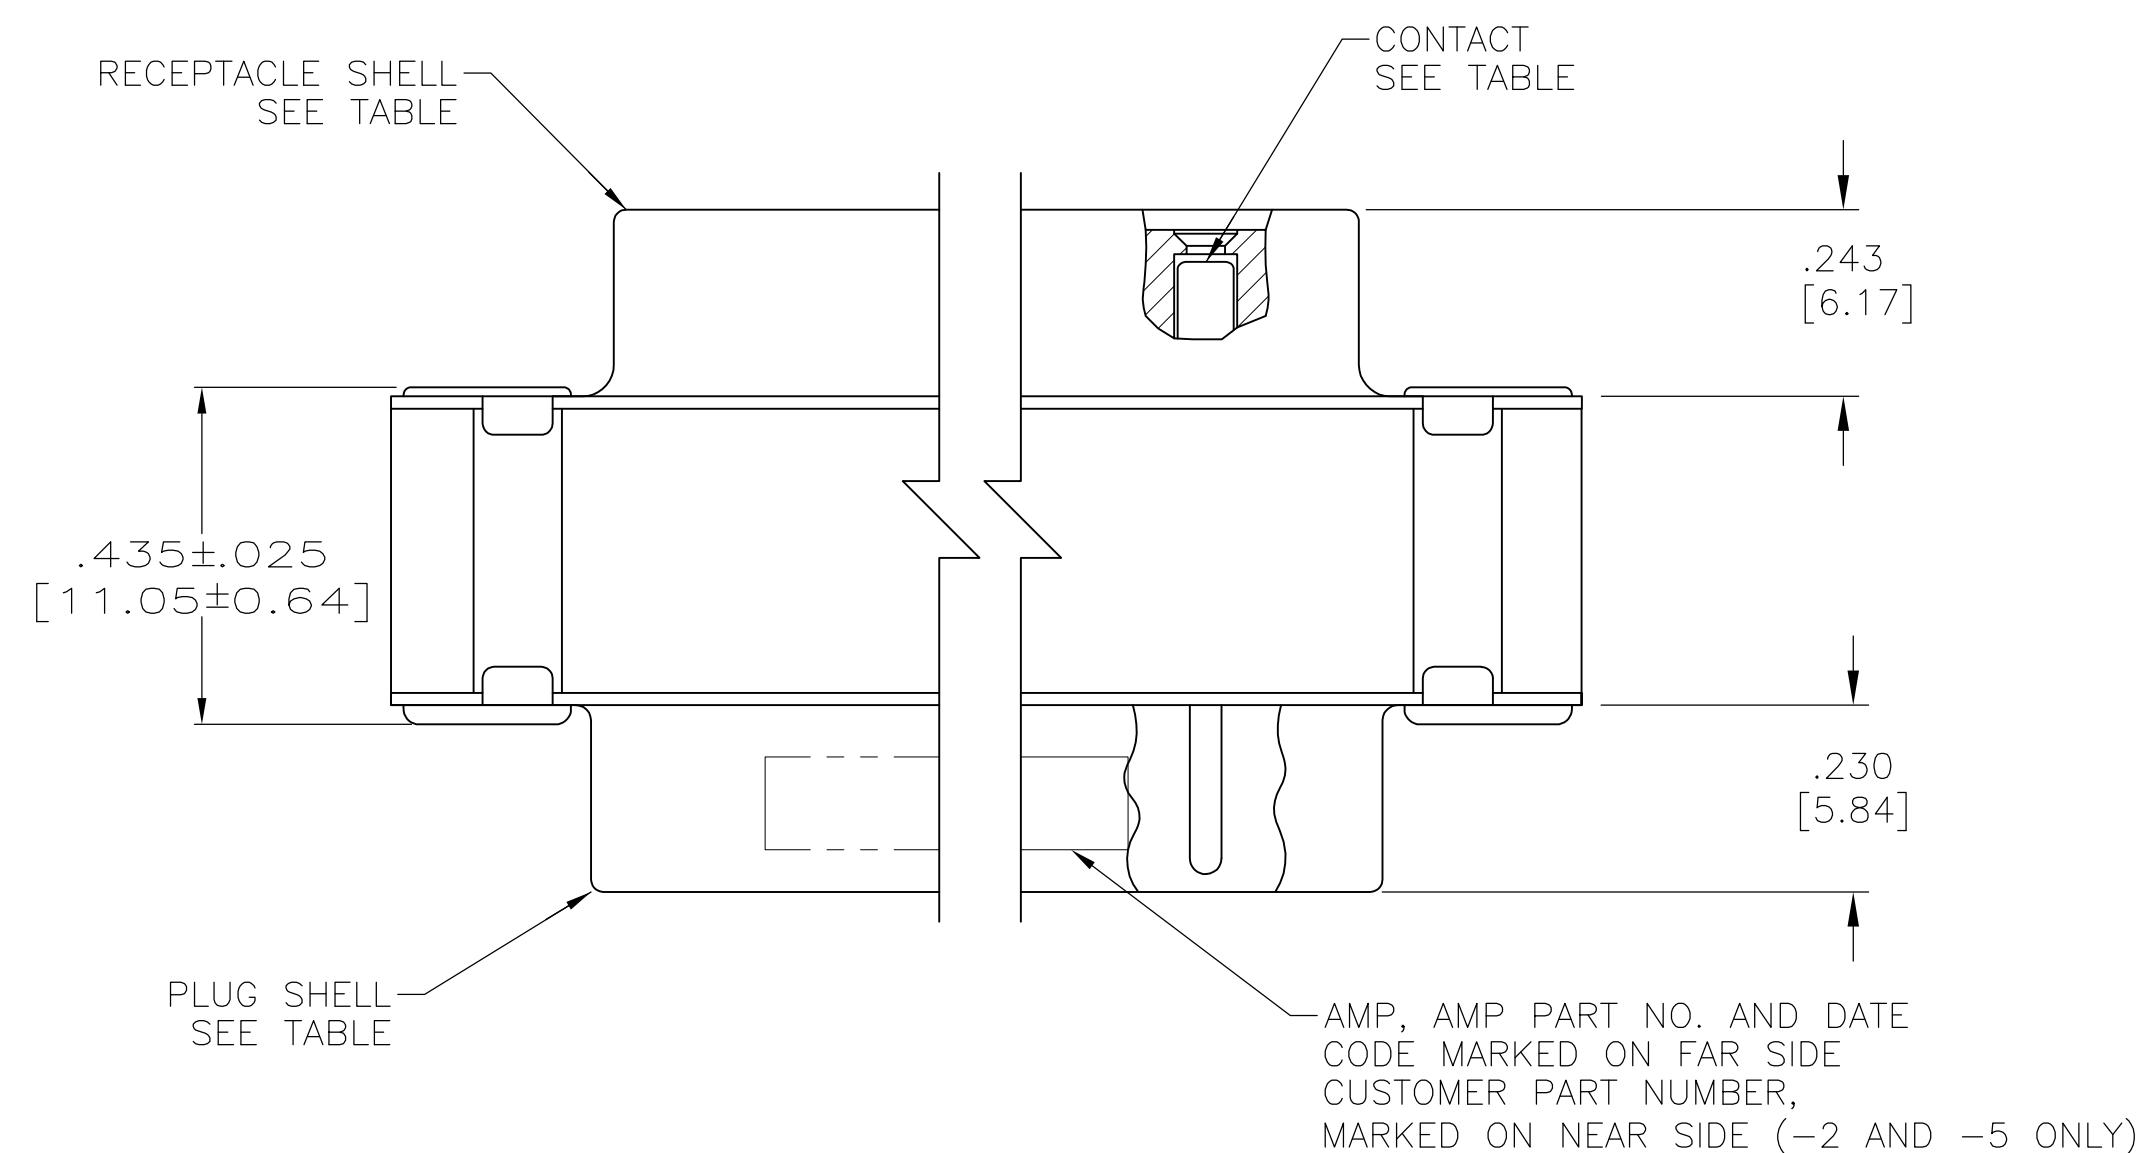
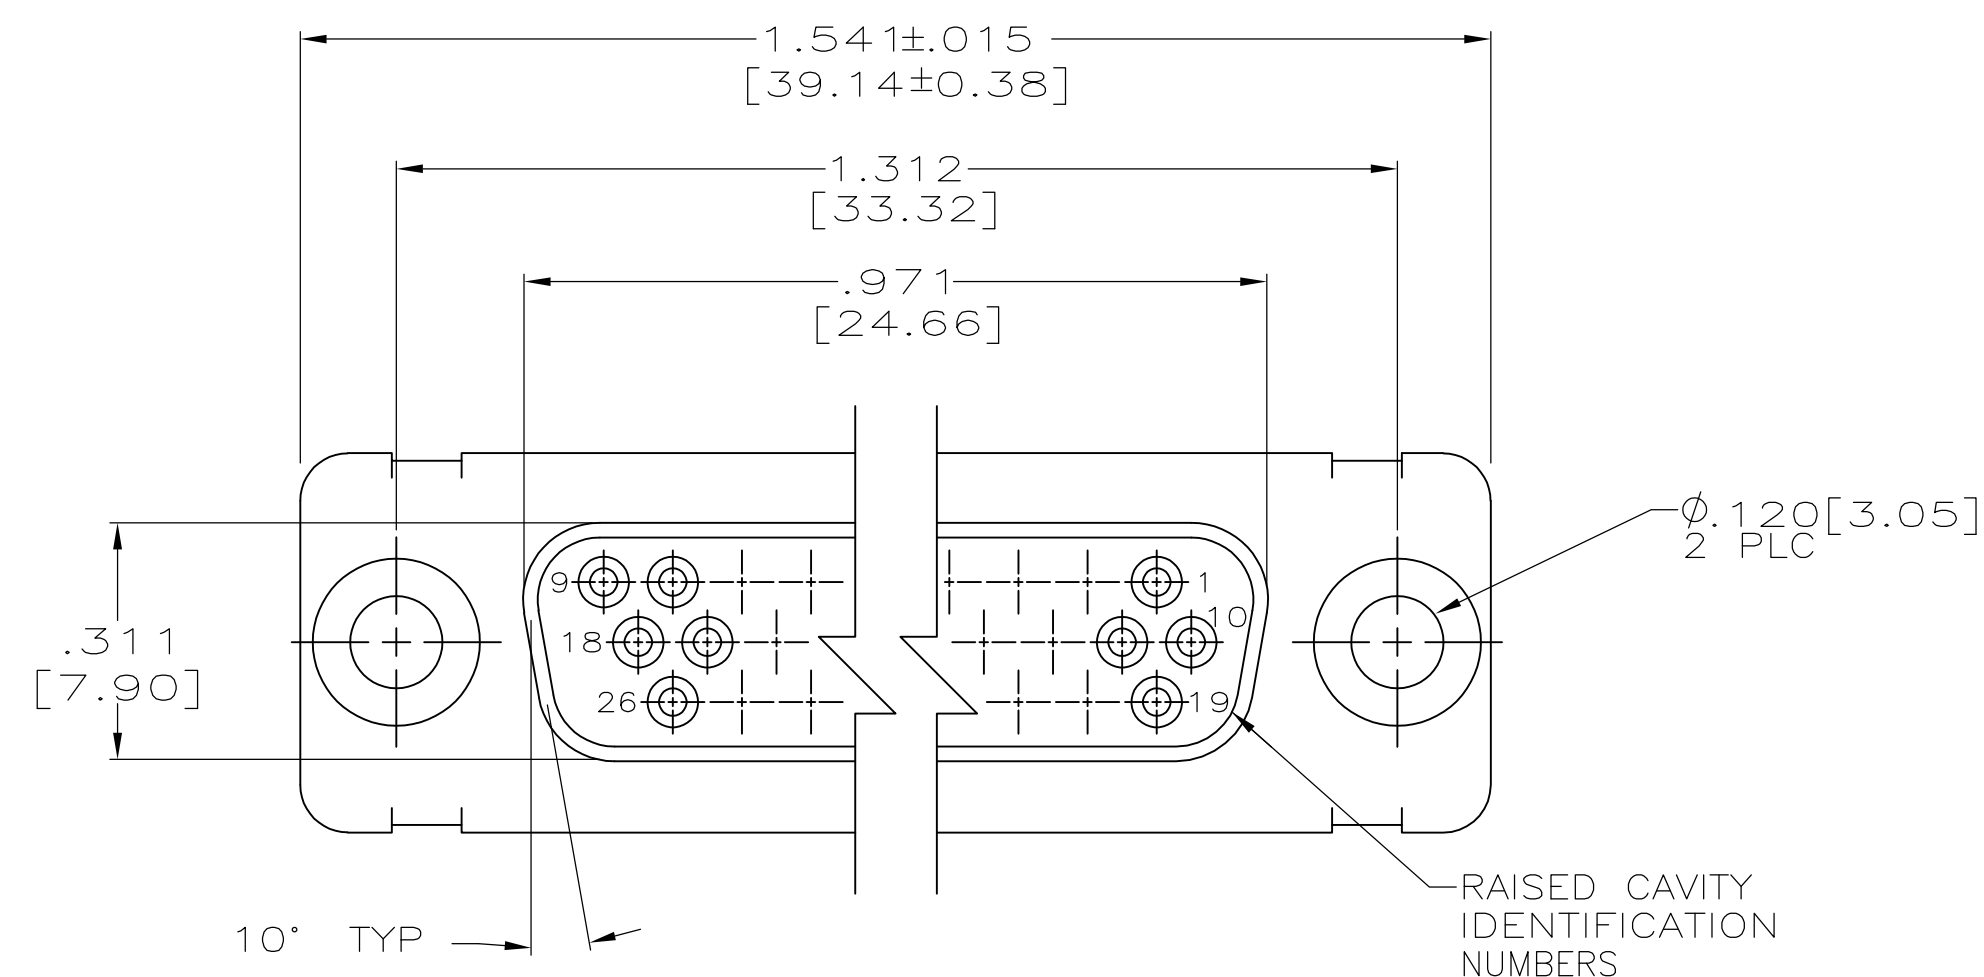
ALL RIGHTS RESERVED

© COPYRIGHT

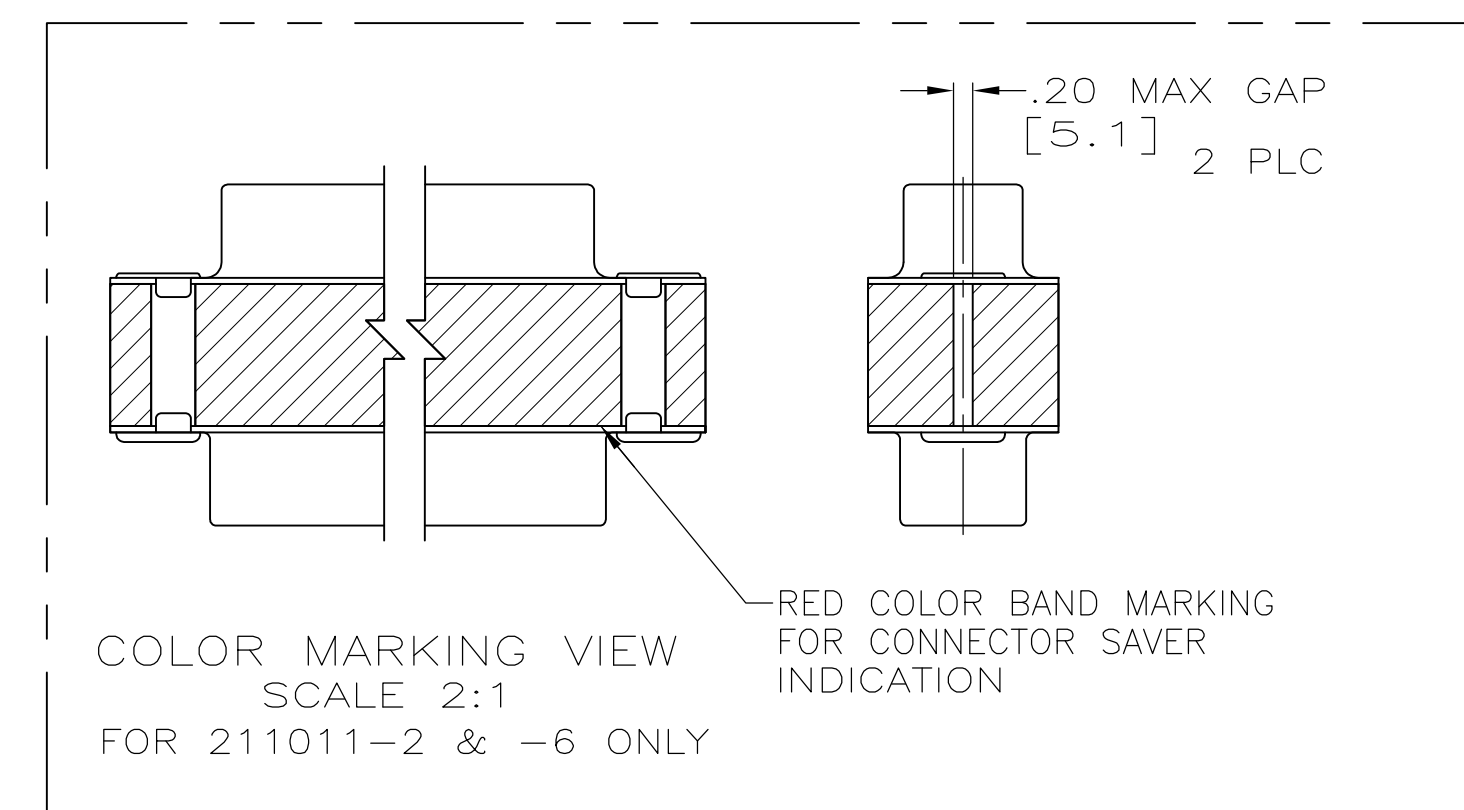
By







REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	V	REV PER ECO 17-000132	5-1-17	CT	DM



1. CONTACTS INCLUDED IN ASSEMBLY.
- △ MAT'L: STEEL, PER ASTM-A-109.
- △ FINISH: CADMIUM PER QQ-P-416.
- △ MAT'L: BRASS PER ASTM-B-36.
- △ FINISH: PLATED ZINC .00020 MIN THK PER ASTM-B-633.
YELLOW CHROMATE FINISH.
- △ CONTACT
- BODY MAT'L: BERYLLIUM COPPER PER ASTM-B-197.
- BODY FINISH: PLATED GOLD, .000050 MIN THK PER
MIL-G-45204 OVER NICKEL, .000050 MIN
THK PER QQ-N-290.
- HOOD MAT'L: STAINLESS STEEL PER ASTM-A-240.
- HOOD FINISH: PASSIVATED PER QQ-P-35
- △ FINISH: PLATED GOLD, .000050 MIN THK PER MIL-G-45204
OVER COPPER FLASH
- △ FINISH: PLATED GOLD, .000050 MIN THK PER MIL-G-45204.
OVER COPPER, .000100 MIN THK PER MIL-C-14550.
- △ CONTACT
- BODY MAT'L: BERYLLIUM COPPER PER ASTM-B-197.
- BODY FINISH: PLATED GOLD, .000050 MIN THK
PER MIL-G-45204 OVER COPPER, .000100 MIN THK
PER MIL-C-14550.
- HOOD MAT'L: COPPER ALLOY PER QQ-B-613.
- FINISH: PLATED GOLD, .000050 MIN THK PER MIL-G-45204
OVER COPPER, .000100 MIN THK PER MIL-C-14550.



OBSOLETE				4U884 SOCN R10002677-0107	211011-6
				2A091-002W-001	211011-5
				—	211011-4
				—	211011-3
				(1J02-107)	211011-2
				—	211011-1
	EYELET	SHELLS	CONTACT	CUSTOMER P/N	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 11-3-98 C.C.THOMAS DWG. 11-17-98 J.NORTON APPROV. 11-17-98 J.NORTON		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 [0.13] 4 PLC ± - ANGLES ± -		NAME CONNECTOR SAVER,AMPLIMITE 26 POSN.SIZE 2,SERIES 90	
		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
MATERIAL -		FINISH -		WEIGHT 0.000000	
		CUSTOMER DRAWING A1 00779		SCALE 1:1	
		SHEET 1 OF 1		REV -	