

## FEATURES

- DESIGNED FOR HEAVY SHOCK AND VIBRATION.
- UNIFORM CLAMPING FORCE AND HIGH THERMAL TRANSFER.
- NARROW WIDTH FOR MAXIMUM PCB COMPONENT AREA.
- LIGHT WEIGHT = ASSEMBLY LENGTH X .104 OZ [2.95 G] OR [1.16 G/CM].
- SPECIAL LENGTHS, FINISH, AND OTHER DESIGN OPTIONS AVAILABLE UPON REQUEST.

## MATERIAL

WEDGES: ALUMINUM 6061-T6.  
ALIGNMENT SPRINGS: 301 STAINLESS STEEL, PASSIVATED.  
ALL OTHER HARDWARE: 18-8 STAINLESS STEEL, PASSIVATED.

PARTS ARE SHIPPED AS COMPLETE ASSEMBLY IN RELAXED STATE EXCEPT FOR RIVET MOUNT OPTION.

RECOMMENDED DRIVE SCREW TORQUE IS 6 IN-LBS [68 N-CM].

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: MACHINED SURFACES ANGULAR $\pm 1^\circ$ TWO PLACE DECIMAL $\pm .02$ THREE PLACE DECIMAL $\pm .005$ INTERPRET GEOMETRIC TOLERANCING PER: ASME Y-14.5M DO NOT SCALE DRAWING		NAME	DATE
		RSB	6 FEB 2013
THIRD ANGLE PROJECTION		TITLE: WEDGELOCK DATASHEET .260 X .225 PROFILE	
CAGE CODE 3E7UB		SIZE C	DWG. NO. 426D-DS
REV 02/13		SCALE: NONE	
SHEET 1 OF 2			

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WAKEFIELD-VETTE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WAKEFIELD-VETTE IS PROHIBITED.

MATERIAL  
SEE PART DETAILS

FINISH  
SEE FINISH TABLE

[LLL] LENGTH TABLE			
ASSY LENGTH [LLL]	[H] MTG X	[C] OPTION X/2	
480 - 749	.900	.450	
750 - 849	1.900	.950	
850 & UP	2.900	1.450	
OTHER LENGTHS AVAILABLE UPON REQUEST			

[H] MOUNTING TABLE	
DASH NO	DESCRIPTION
A	NO MOUNTING HOLES
R	$\phi .068 / .073$ THRU $\phi .156 \times \downarrow .20$ $100^\circ \times \phi .140$
T	#0-80 UNF-2B THREADS
S	#2-56 UNC-2B THREADS
U	M2 X .4-6H THREADS
M	M2.5 X .45-6H THREADS

[F] FINISH TABLE	
DASH NO	DESCRIPTION
A	NONE
C	CHEM FILM PER MIL-DTL-5541, CLASS 1A, TYPE I (CLEAR)
G	CHEM FILM PER MIL-DTL-5541, CLASS 1A, TYPE I (GOLD)
B	BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2
H	HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2
N	NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, BRIGHT
E	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B, BRIGHT
T	TRIVALENT CHEM FILM PER MIL-DTL-5541, CLASS 1A, TYPE II (CLEAR), RoHS COMPLIANT
ALL THREADS ARE GAUGED PRIOR TO PLATING	

PART#1 EXAMPLE: 426D-480UMG  
4.80" LENGTH, M2 MOUNT HOLES, METRIC M2.5 SOCKET HEAD, GOLD CHEM FILM

PART#2 EXAMPLE: 426D-480UMG-CP  
SAME AS ABOVE PLUS CENTER MOUNTING HOLE AND LOCK PATCH OPTIONS

PART DEFINITION  
(REQUIRED)

PART NUMBER CODE

PART NUMBER OPTIONS  
(NOT REQUIRED)

426D - [LLL] [H] [D] [F] - [C] [W] [N] [P] [V]

SERIES  
PART NO

LENGTH  
(EX. 480 = 4.80")

MOUNTING HOLE  
(SEE MOUNTING TABLE)

DRIVE SCREW  
'M' FOR M2.5 HEX  
'S' FOR 3/32 HEX

FINISH  
(SEE FINISH TABLE)


ADD 'V' FOR OPTIONAL  
VISUAL INDICATOR

ADD 'P' FOR OPTIONAL  
LOCK PATCH

OPTIONAL LOCK NUT  
ADD 'A' FOR MS21043-04 SILVER PLATED A286 SS  
ADD 'N' FOR MS21042-04 CADMIUM PLATED STEEL


ADD 'W' FOR OPTIONAL  
LOCK AND FLAT WASHER

ADD 'C' FOR OPTIONAL  
CENTER MOUNTING HOLE

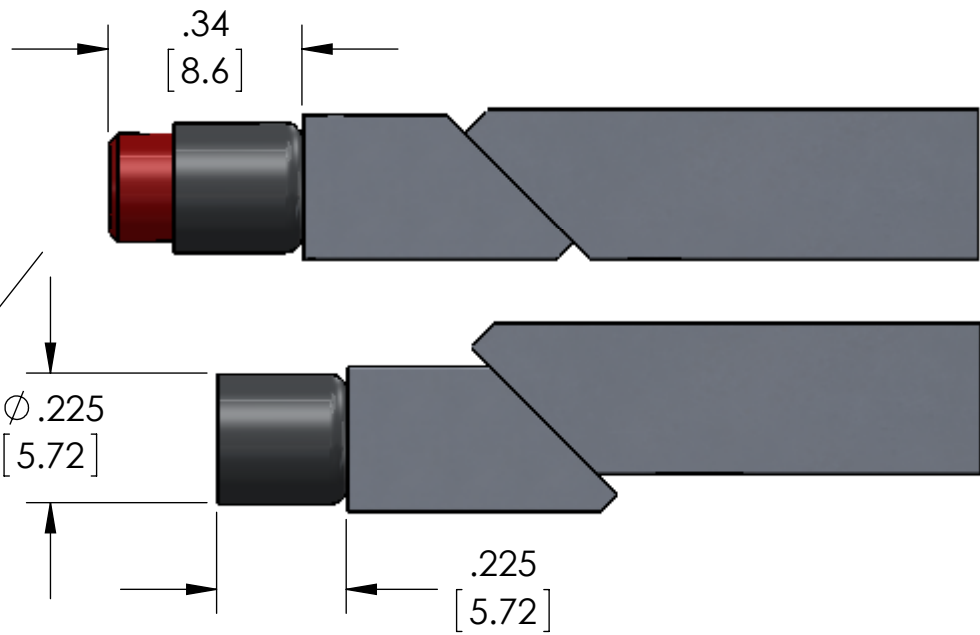

'V' OPTION

VISUALLY CONFIRMS LOCKED IN PLACE  
WHEN RED SCREW HEAD IS CONCEALED

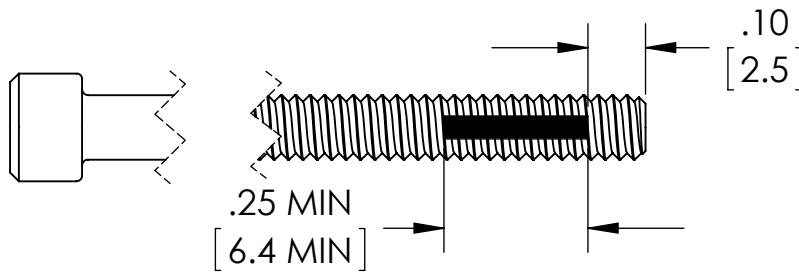

'P' OPTION

NYLON PATCH PER MIL-F-18240  
PROVIDES ADDITIONAL RESISTANCE  
TO SHOCK AND VIBRATION




'A' OR 'N' OPTION

PREVENTS DISASSEMBLY OF  
REAR WEDGE FROM SCREW

'W' OPTION

LOCK AND FLAT WASHERS

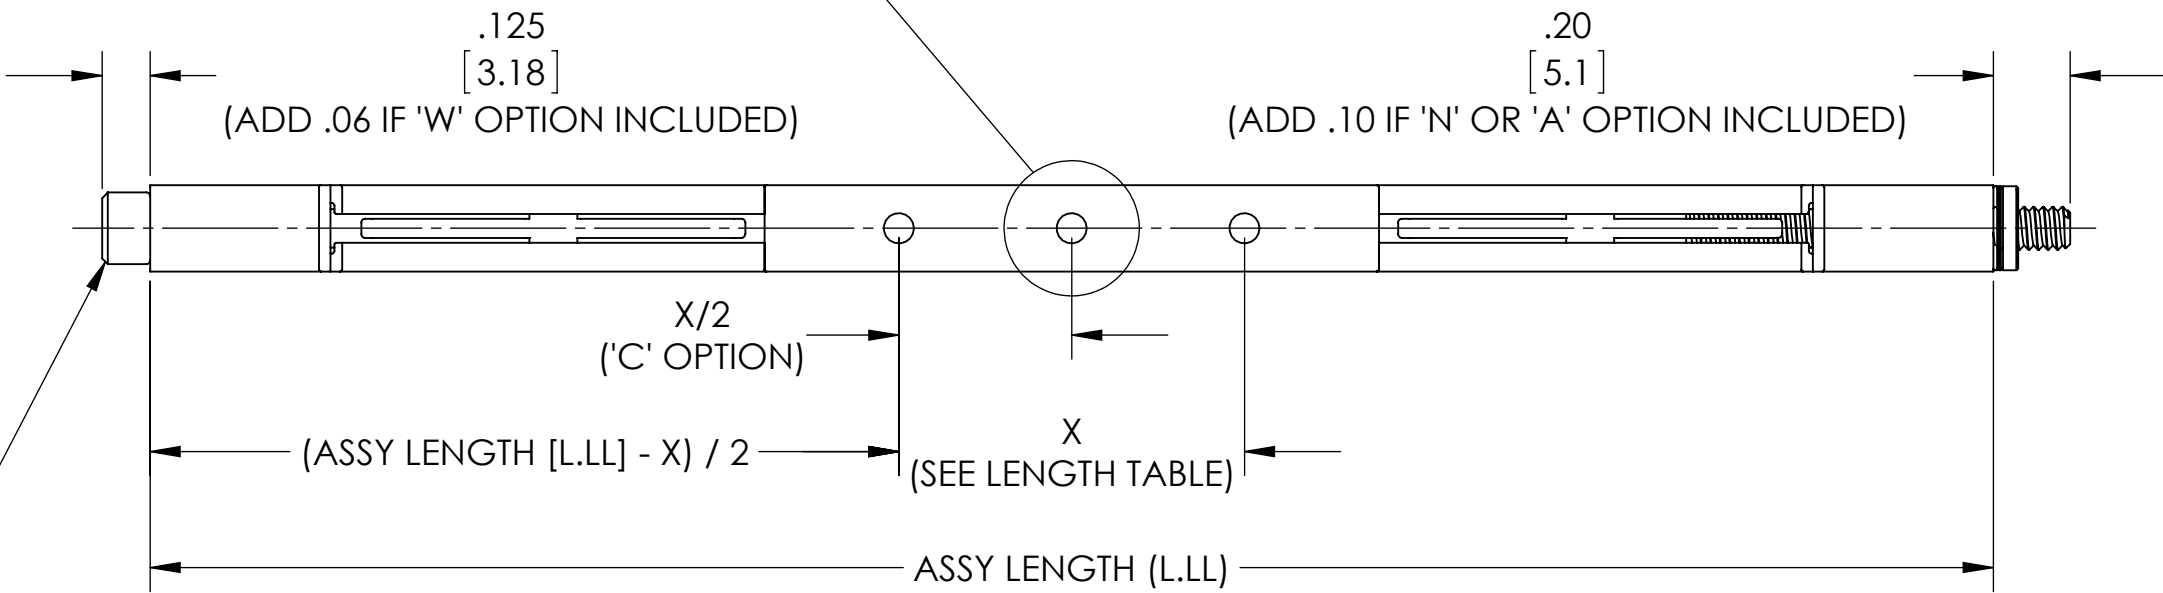

BOTTOM VIEW

ADD .19 TO SCREW LENGTH  
IF 'V' OPTION INCLUDED