


REV.	DATE	DESCRIPTION
NC	04/16/98	INITIAL RELEASE
A	11/03/03	UPDATE DRAWING FORMAT

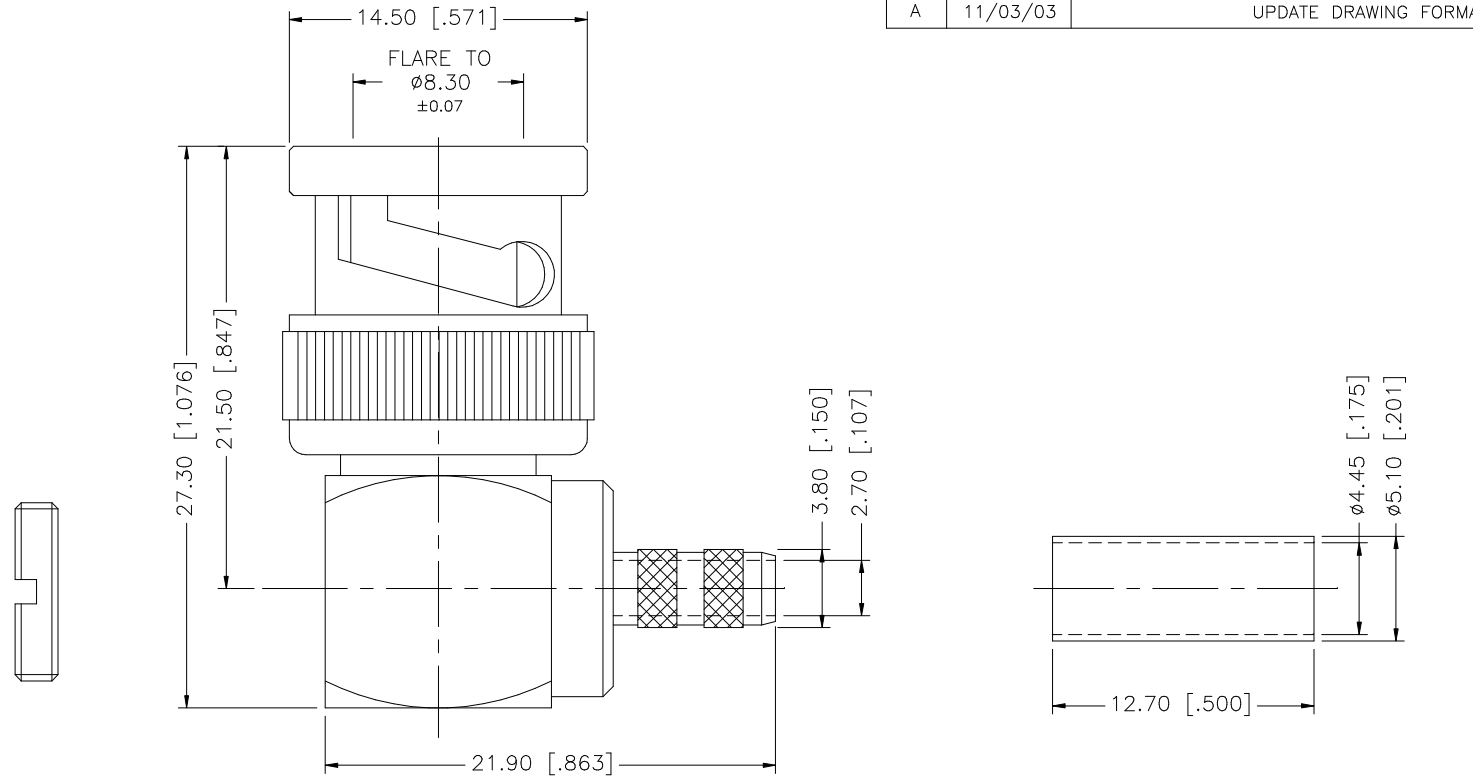

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CONTACT PIN TO SOLDER

RECOMMENDED
CABLE STRIPPING DIM'S

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	G.R.S.	11/03/03											
7						CHECKED													
6										PART DESCRIPTION									
5	NUT	BRASS	NICKEL	1						BNC R/A CRIMP PLUG (FOR BELDEN 8218)									
4	FERRULE	COPPER	NICKEL	1						RG-180/U, 195/U, 122/U CABLE – 75ohm									
3	CONTACT PIN	BRASS	GOLD	1						PART NO.									
2	INSULATOR	TEFLON	NATURAL	1						112588									
1	BODY	BRASS	NICKEL	1					CAD FILE		DWG. NO.		112588.DWG	REV.	A	SIZE	A	SCALE	NA
DESCRIPTION					MATERIAL	FINISH	QTY	C:/112/112588.DWG											