


NOTES:

1. MATERIALS AND FINISHES:
 BODY, COUPLING NUT & BUSHING - BRASS, NICKEL PLATING
 CONTACT - BRASS, SILVER PLATING
 CONTACT - BeCu, SILVER PLATING
 INSULATOR - PTFE, NATURAL
 INSULATOR - COPOLYMER OF STRENE, NATURAL
 RETAINING RING - PHOSPHOR BRONZE, NICKEL PLATING
 RETAINING RING - BeCu, SILVER PLATING
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 14000, AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	--
U	REDRAWN IN PRO-E & COD SHEET ADDED	9/2/15	50266	AAP

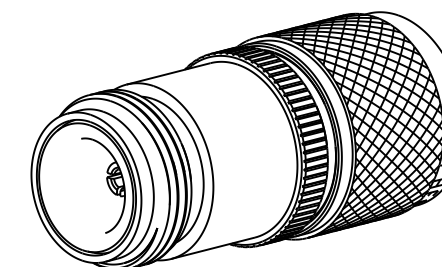

SCALE 1.500

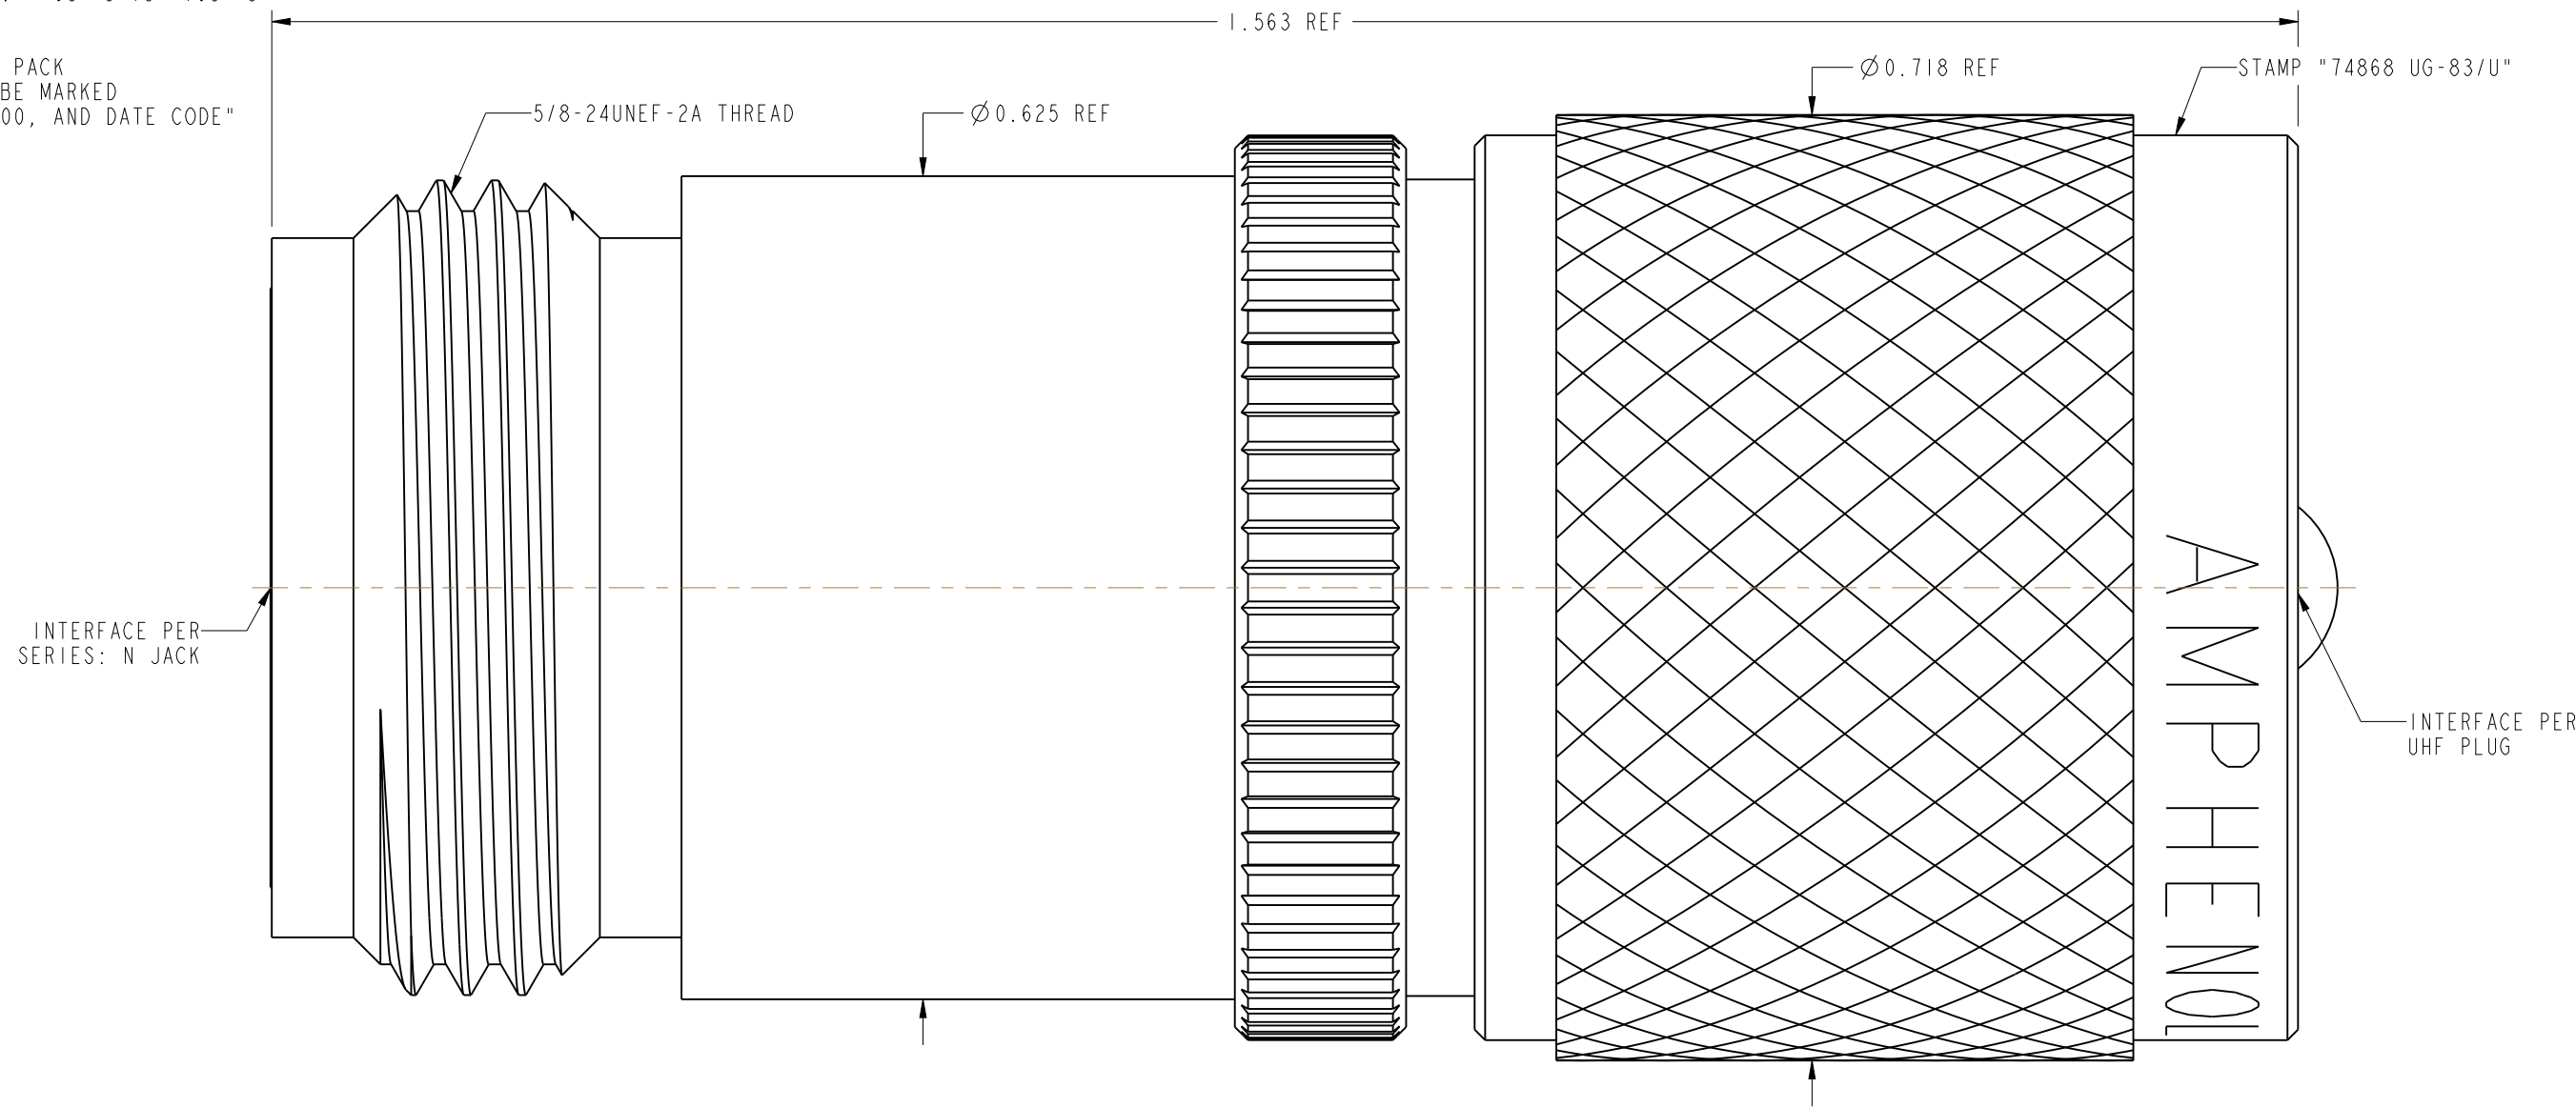

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES $\pm .015$ (0,381 mm) $\pm .005$ (0,127 mm) $\pm 1^\circ$	MATERIAL	DRAWN	DATE	TITLE N STR JACK TO UHF STR PLUG ADAPTER UG-83/U		Amphenol RF www.amphenolrf.com	
	SEE NOTES	A ARUN PRABU	14-Nov-14				
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE EAR #	ENGINEER	DATE	SCALE: 7.2:1.0 SHEET 2 OF 2		DRAWING NO. 14000 ITEM NO. 14000	
	CONFIGURATION LEVEL: In Work	K. CAPOZZI	14-Nov-14				
	FINISH	APPROVED	DATE	REV	DWG SIZE B		PART NO. 14000
	K. CAPOZZI	7/23/15	U				