

NOTES:

FILE NO.

B - CD - 501 - 01


- NOTES:
- ① MAT'L: COPPER (STOCK TKN. $\frac{.031}{.79} \pm .001$)
PLATING: ELECTRO TIN (.0003 MIN)
 - ② TIN-PLATED BRASS FUNNEL FERRULE
 - ③ NYLON INSULATION (COLOR CODED BLUE)

STUD SIZES: (+.005)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390

"UL" LISTING #E32244
"CSA" LISTING #18689

WIRE SIZE: 16-14 AWG
1.0-2.5 MM²

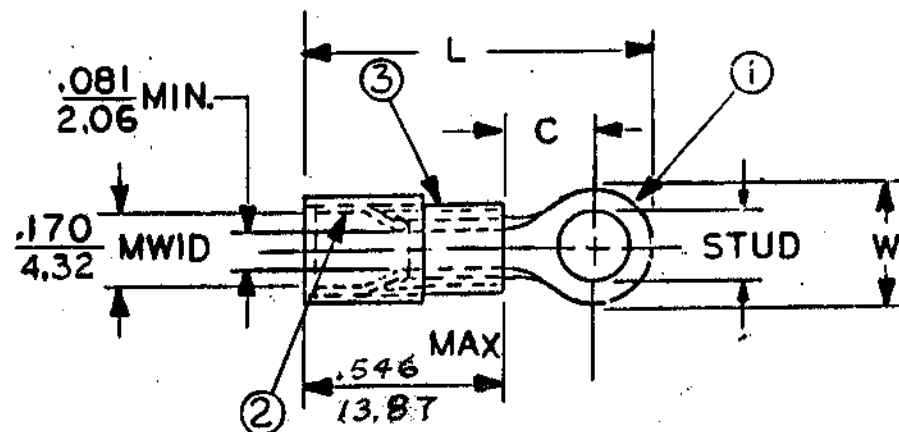

ALL DIMENSIONS= $\frac{\text{INCHES}}{\text{MM}}$

(MWID)=DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.				AVAILABLE STUD SIZES
B-518-	<u>.534</u> 13.56	<u>.554</u> 14.07	<u>1.407</u> 55.24				10,14,56,38
B-523-	<u>.250</u> 6.35	<u>.209</u> 5.31	<u>.931</u> 23.65				02,04,06,08
B-525-	<u>.467</u> 11.86	<u>.388</u> 9.86	<u>1.208</u> 30.68				10,14,56
B-539-	<u>.342</u> 8.69	<u>.310</u> 7.87	<u>1.067</u> 27.10				04,06,08,10
B-537-	<u>.312</u> 7.92	<u>.285</u> 7.24	<u>1.022</u> 25.96				04,06,08,10

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE	TITLE: RING TONGUE TERMINAL AVIKRIMP 500-SERIES	
FRAC.	DEC.	ANG.	REV. A ONLY 1/30 ALM 1/6/93	DRWN. BY: KJ	11-12-84		
±	±	±		CHKD. BY: GZ	11-30-84		
				APPRD. BY:			
						DWG. NO.	A CUSTOMER DWG.