
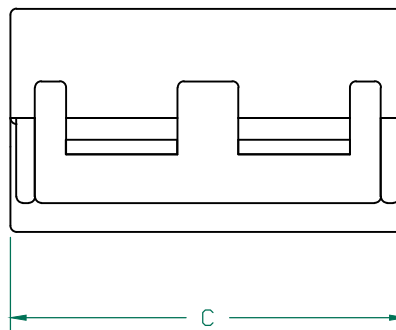


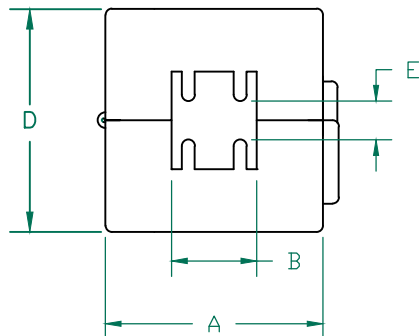

NOTES:

1. ASSEMBLED PART #: 28A2029-0A0
2. CASE COLOR: WHITE - "0A0"
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CORE DIMENSIONS REFER TO 28A2029-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.


CASE DIMENSIONS:

A	22.28 [.877]	±	1.00 [.039]
B	10.00 [.394]	±	1.00 [.039]
C	32.77 [1.290]	±	1.00 [.039]
D	21.84 [.860]	±	1.00 [.039]
E	4.30 [.170]	±	Ref.

IMPEDANCE (Z)

Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	95 Ω	250 Ω	420 Ω
Minimum	- Ω	200 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

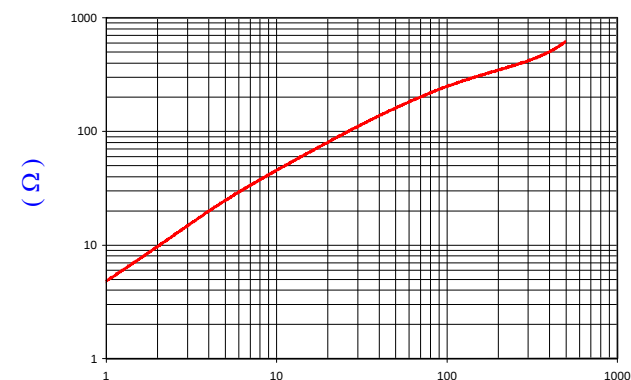

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF #3399

**UNCONTROLLED
DOCUMENT**

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
X	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 4&5	01/13/14	Jcai	PROJECT/PART NUMBER: 28A2029-0A0			
W	UPDATE CORE DIM C	07/06/12	Jcai				
V	UPDATE LOGO AND ADD NOTES 3	12/16/11	Jcai	DATE: 01/16/02		SCALE: NTS	MATERIAL: Ferrite
U	UPDATE 100MHz MINIMUM VALUE	07/17/07	TMB	CAD # 28A2029-0A0-X		TOOL # -	
T	UPDATE COMPANY LOGO	04/18/07	TMB				
REV	DESCRIPTION	DATE	INT				

Laird

REV X PART TYPE: FERRITE SNAP-ON DRAWN BY: JAZ