



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER
ADD PCB LAYOUT
R.STA.MONICA MAY.24/2011
(12)

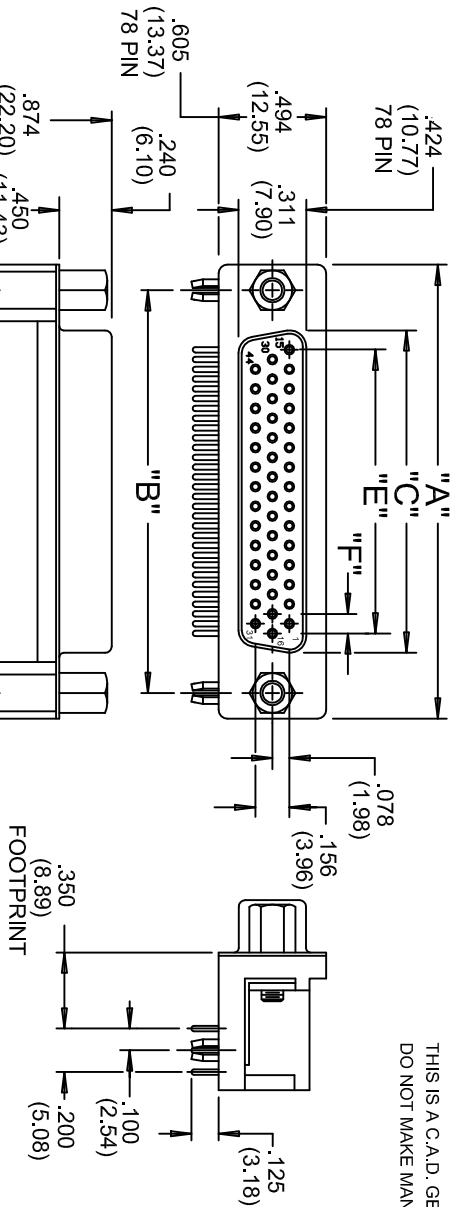

MATERIALS:
INSULATOR: THERMOPLASTIC POLYESTER, UL94V-0
CHEMICAL RESISTANCE, COLOR BLACK
SHELL: STEEL, NICKEL PLATED
CONTACT: SEE ORDERING CODE
GOLD FLASH (CONTACT CODE 263)
10 MICRONS GOLD (CONTACT CODE 563)
30 MICRONS GOLD (CONTACT CODE 663)
TIN PLATING ON TAIL ENDS

ELECTRICAL:
CURRENT RATING: 3 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC rms AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
CONTACT RESISTANCE: 10 MILLIOHMS MAX.
WORKING TEMPERATURE: -55° TO +105° C
FOR MATL CODE 586: PROCESSING TEMPERATURE: -260° C MAX.

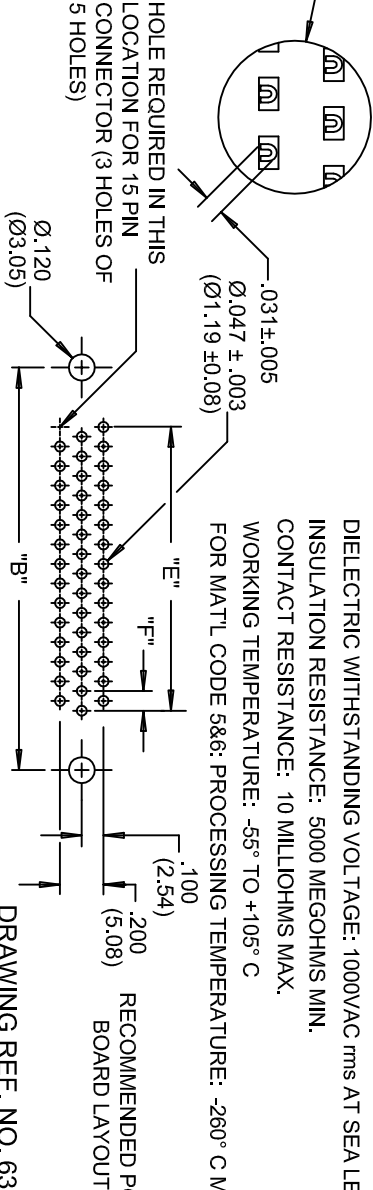

DRAWING REF. NO. 633000

ORDERING CODE

SERIES _____
NUMBER OF CONTACTS _____
CONTACT FINISH CODE _____
CONNECTOR CODE _____
63- STANDARD CONTACTS, BLACK INSULATOR
73- 9TH PIN RECESSED .050(3.05) BLACK INSULATOR
74- 9TH PIN RECESSED .050(3.05) BLUE INSULATOR
CONNECTOR MATERIAL CODE: _____
0- PHOSPHOR BRONZE
1- BRASS
5- PHOSPHOR BRONZE, HIGH TEMP INSULATOR
6- BRASS, HIGH TEMP INSULATOR
GROUNDING FEATURE _____
1- 120(3.05) DIA. THROUGH HOLE TOP GROUND
2- 120(3.05) DIA. THROUGH HOLE BOTTOM GROUND
3- TWO PRONG BOARDLOCKS FOR .120(3.05) DIA. HOLE
4- FOUR PRONG BOARDLOCKS FOR .120(3.05) DIA. HOLE
MOUNTING OPTIONAL _____
0- FIXED ROUND STANDOFF WITH THREADED INSERT
1- .125" DIA. THROUGH HOLE
2- 4-40 UNC THREADED INSERT
3- 4-40 UNC THREADED HEX STANDOFF

NUMBER OF CONTACTS	"A" Inch (mm)	"B" Inch (mm)	"C" Inch (mm)	"E" Inch (mm)	"F" Inch (mm)
15	1.214 (30.84)	.984 (24.99)	.642 (16.30)	.405 (10.29)	.090 (2.29)
26	1.545 (39.24)	1.312 (33.32)	.971 (24.66)	.765 (19.43)	.090 (2.29)
44	2.088 (53.04)	1.852 (47.04)	1.511 (38.38)	1.305 (33.15)	.090 (2.29)
62	2.730 (69.34)	2.500 (63.50)	2.159 (54.84)	1.948 (49.47)	.095 (2.41)
78	2.635 (66.93)	2.406 (61.11)	2.064 (52.42)	1.805 (45.85)	.095 (2.41)

634 SERIES HIGH DENSITY SUBMINIATURE D CONNECTOR RECEPTACLE(SOCKET) RIGHT ANGLE .350(8.89) FOOTPRINT

DRAWN: F.BRIONES
CHECKED: _____
DATE: NOV. 26/97
DATE: _____

SEE ORDERING CODE

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THIS SERIES FULLY CONFORMS
TO THE EUROPEAN UNION
DIRECTIVES 2002/95/EC AND
2002/96/EC FOR RoHS COMPLIANCY.

DRAWING NUMBER
634-000-001
ISSUE
12