

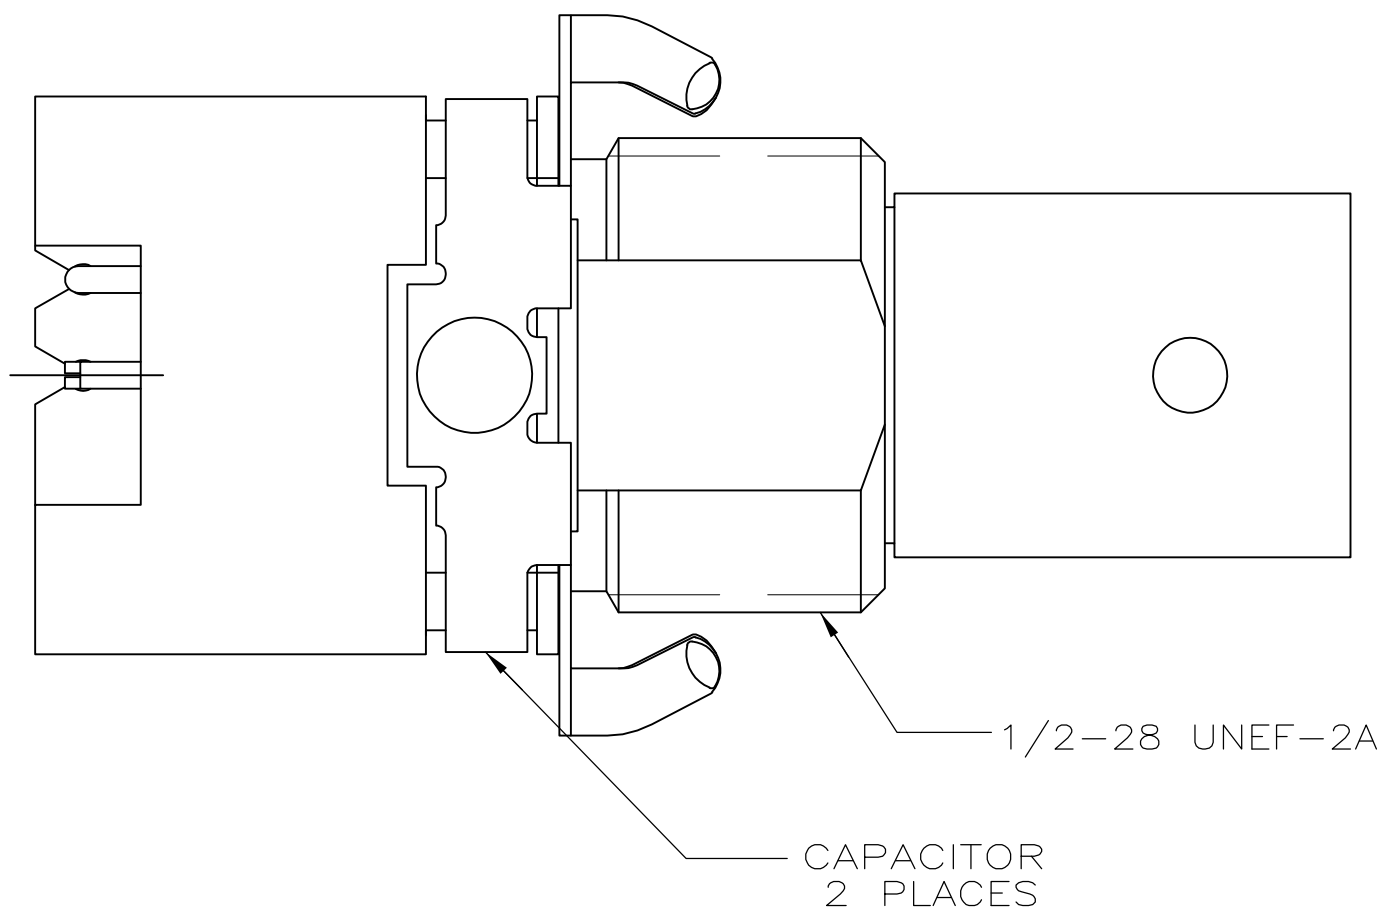
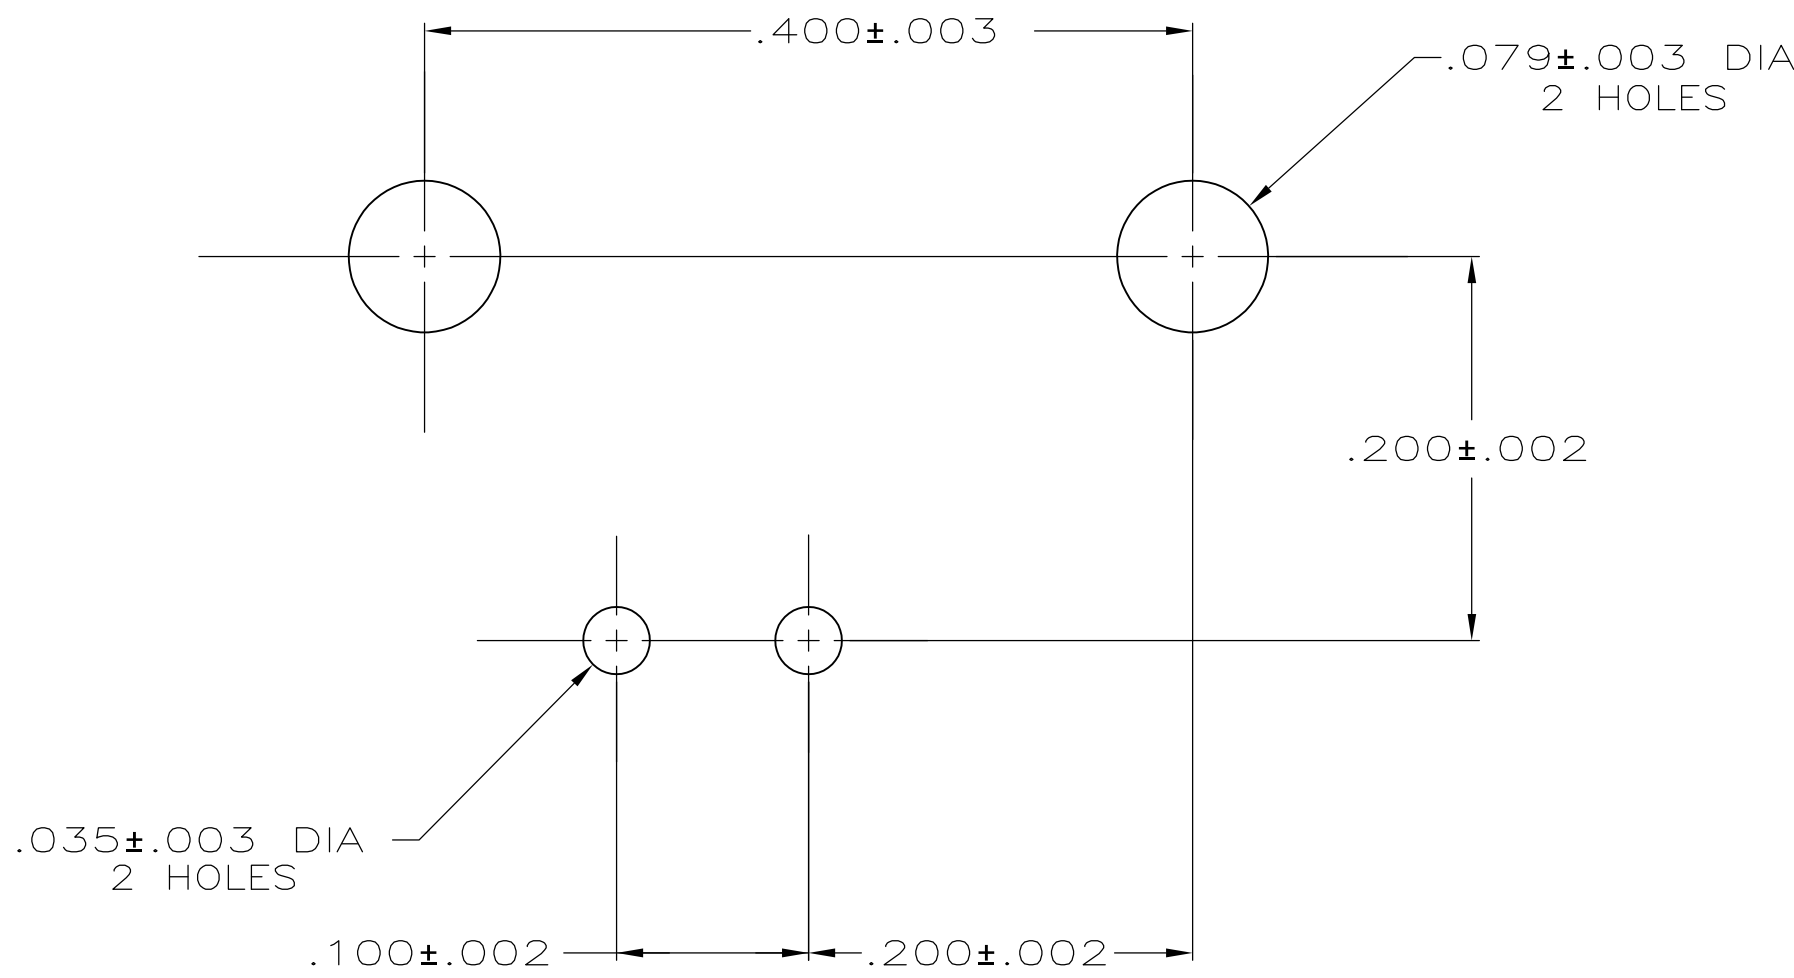
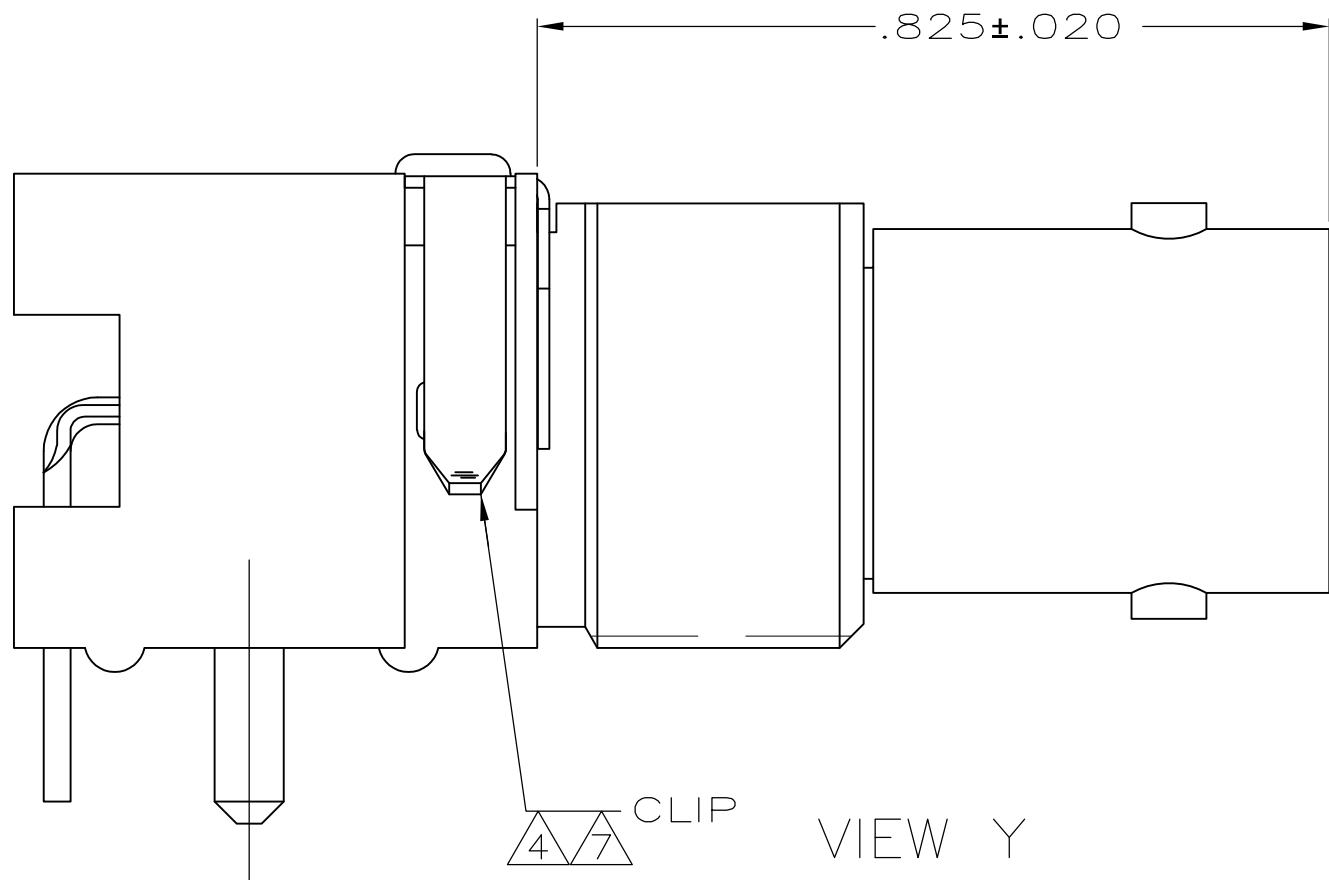
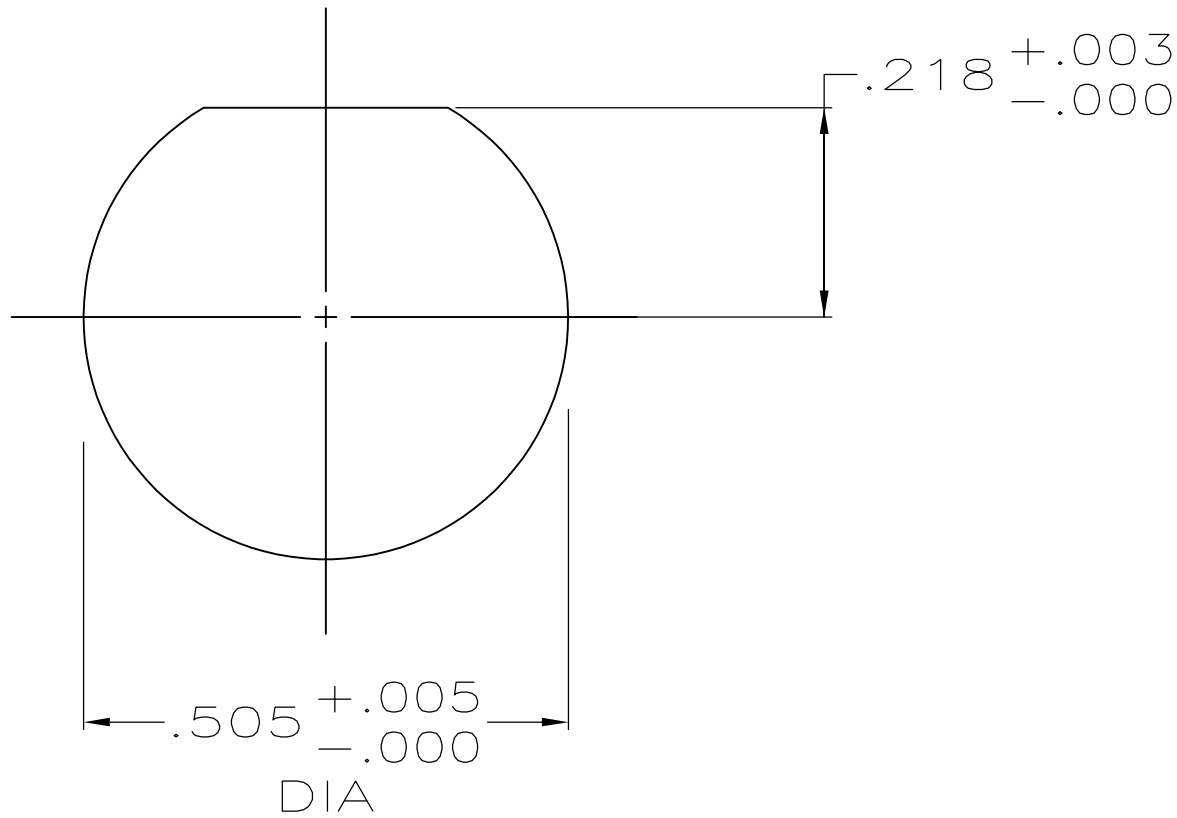
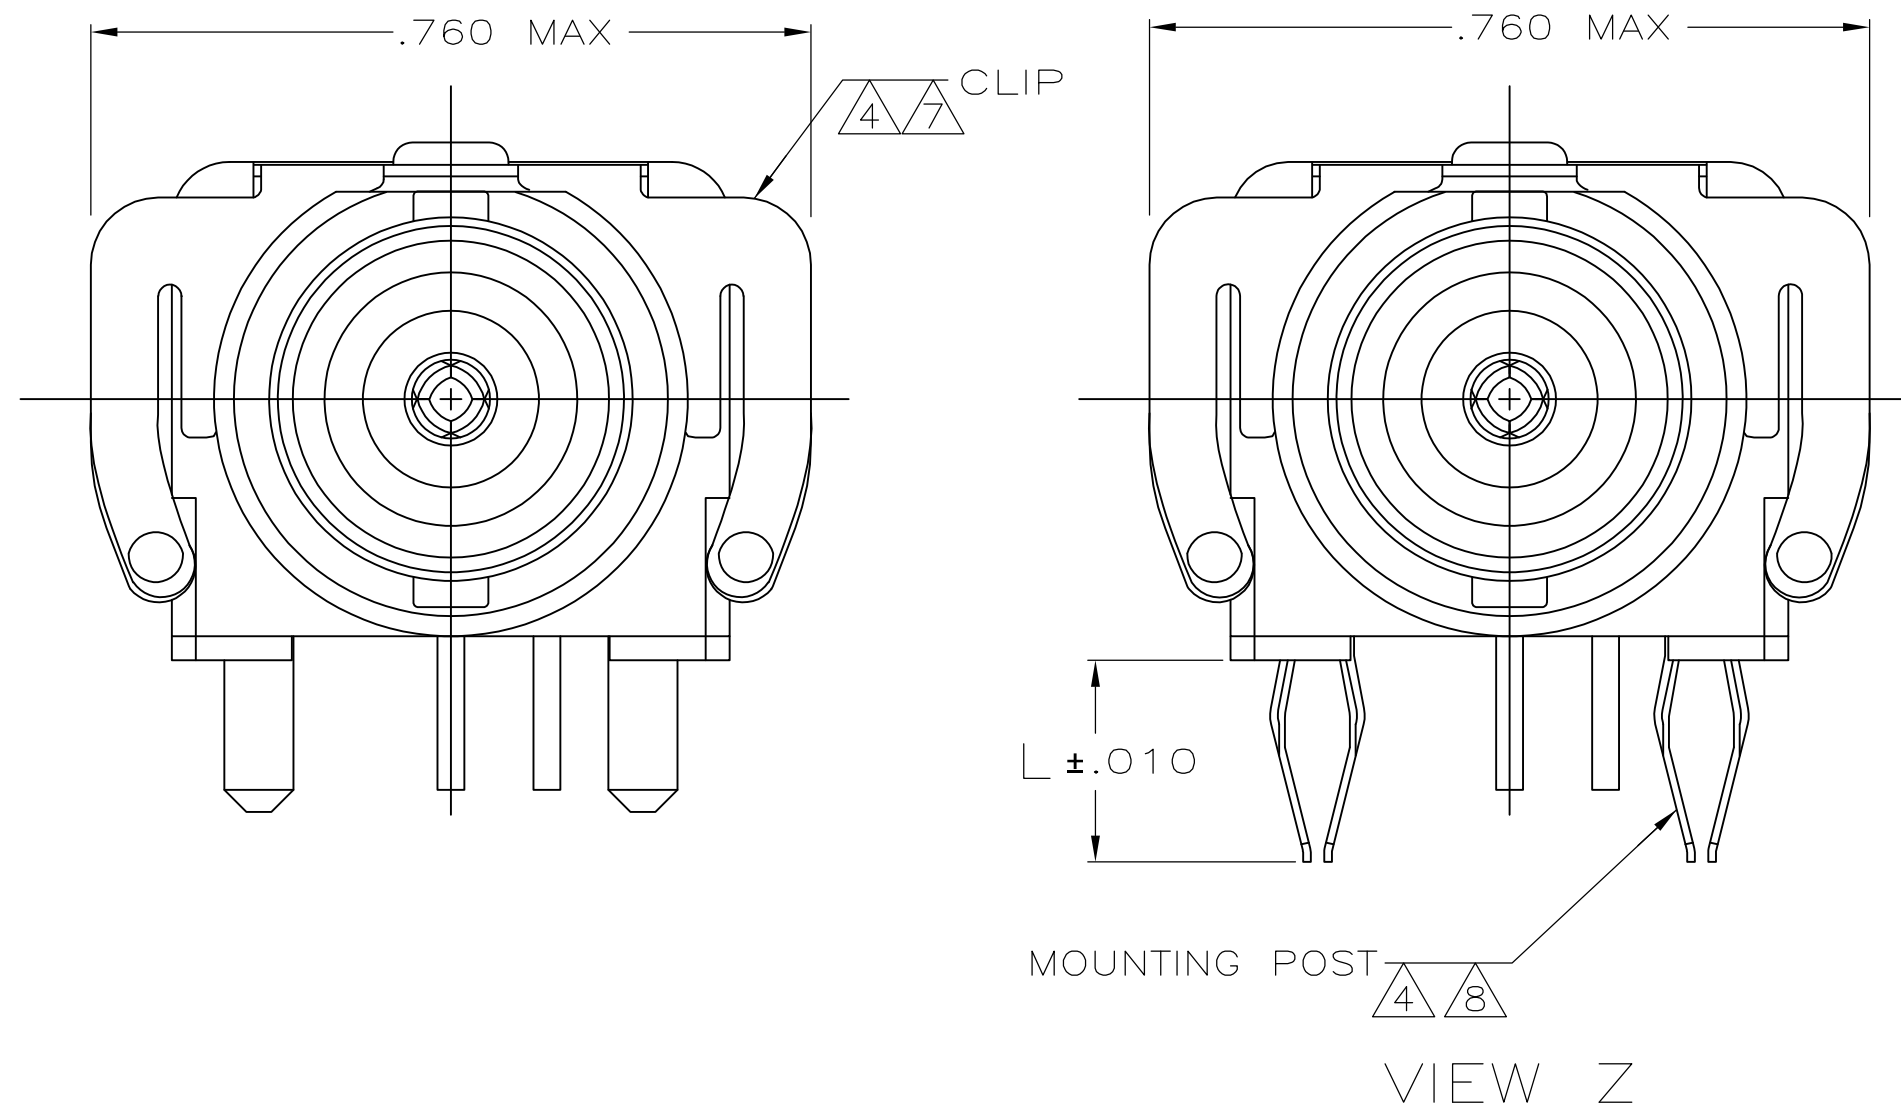


LOC		DIST		REVISIONS				
AJ		16		REV	DESCRIPTION	DATE	DWN	APVD
				AB	REVISED PER ECO-08-009474	7/21/2008	DW	JL
				AB1	REVISED PER ECO-09-021826	12SEP09	KK	AEG

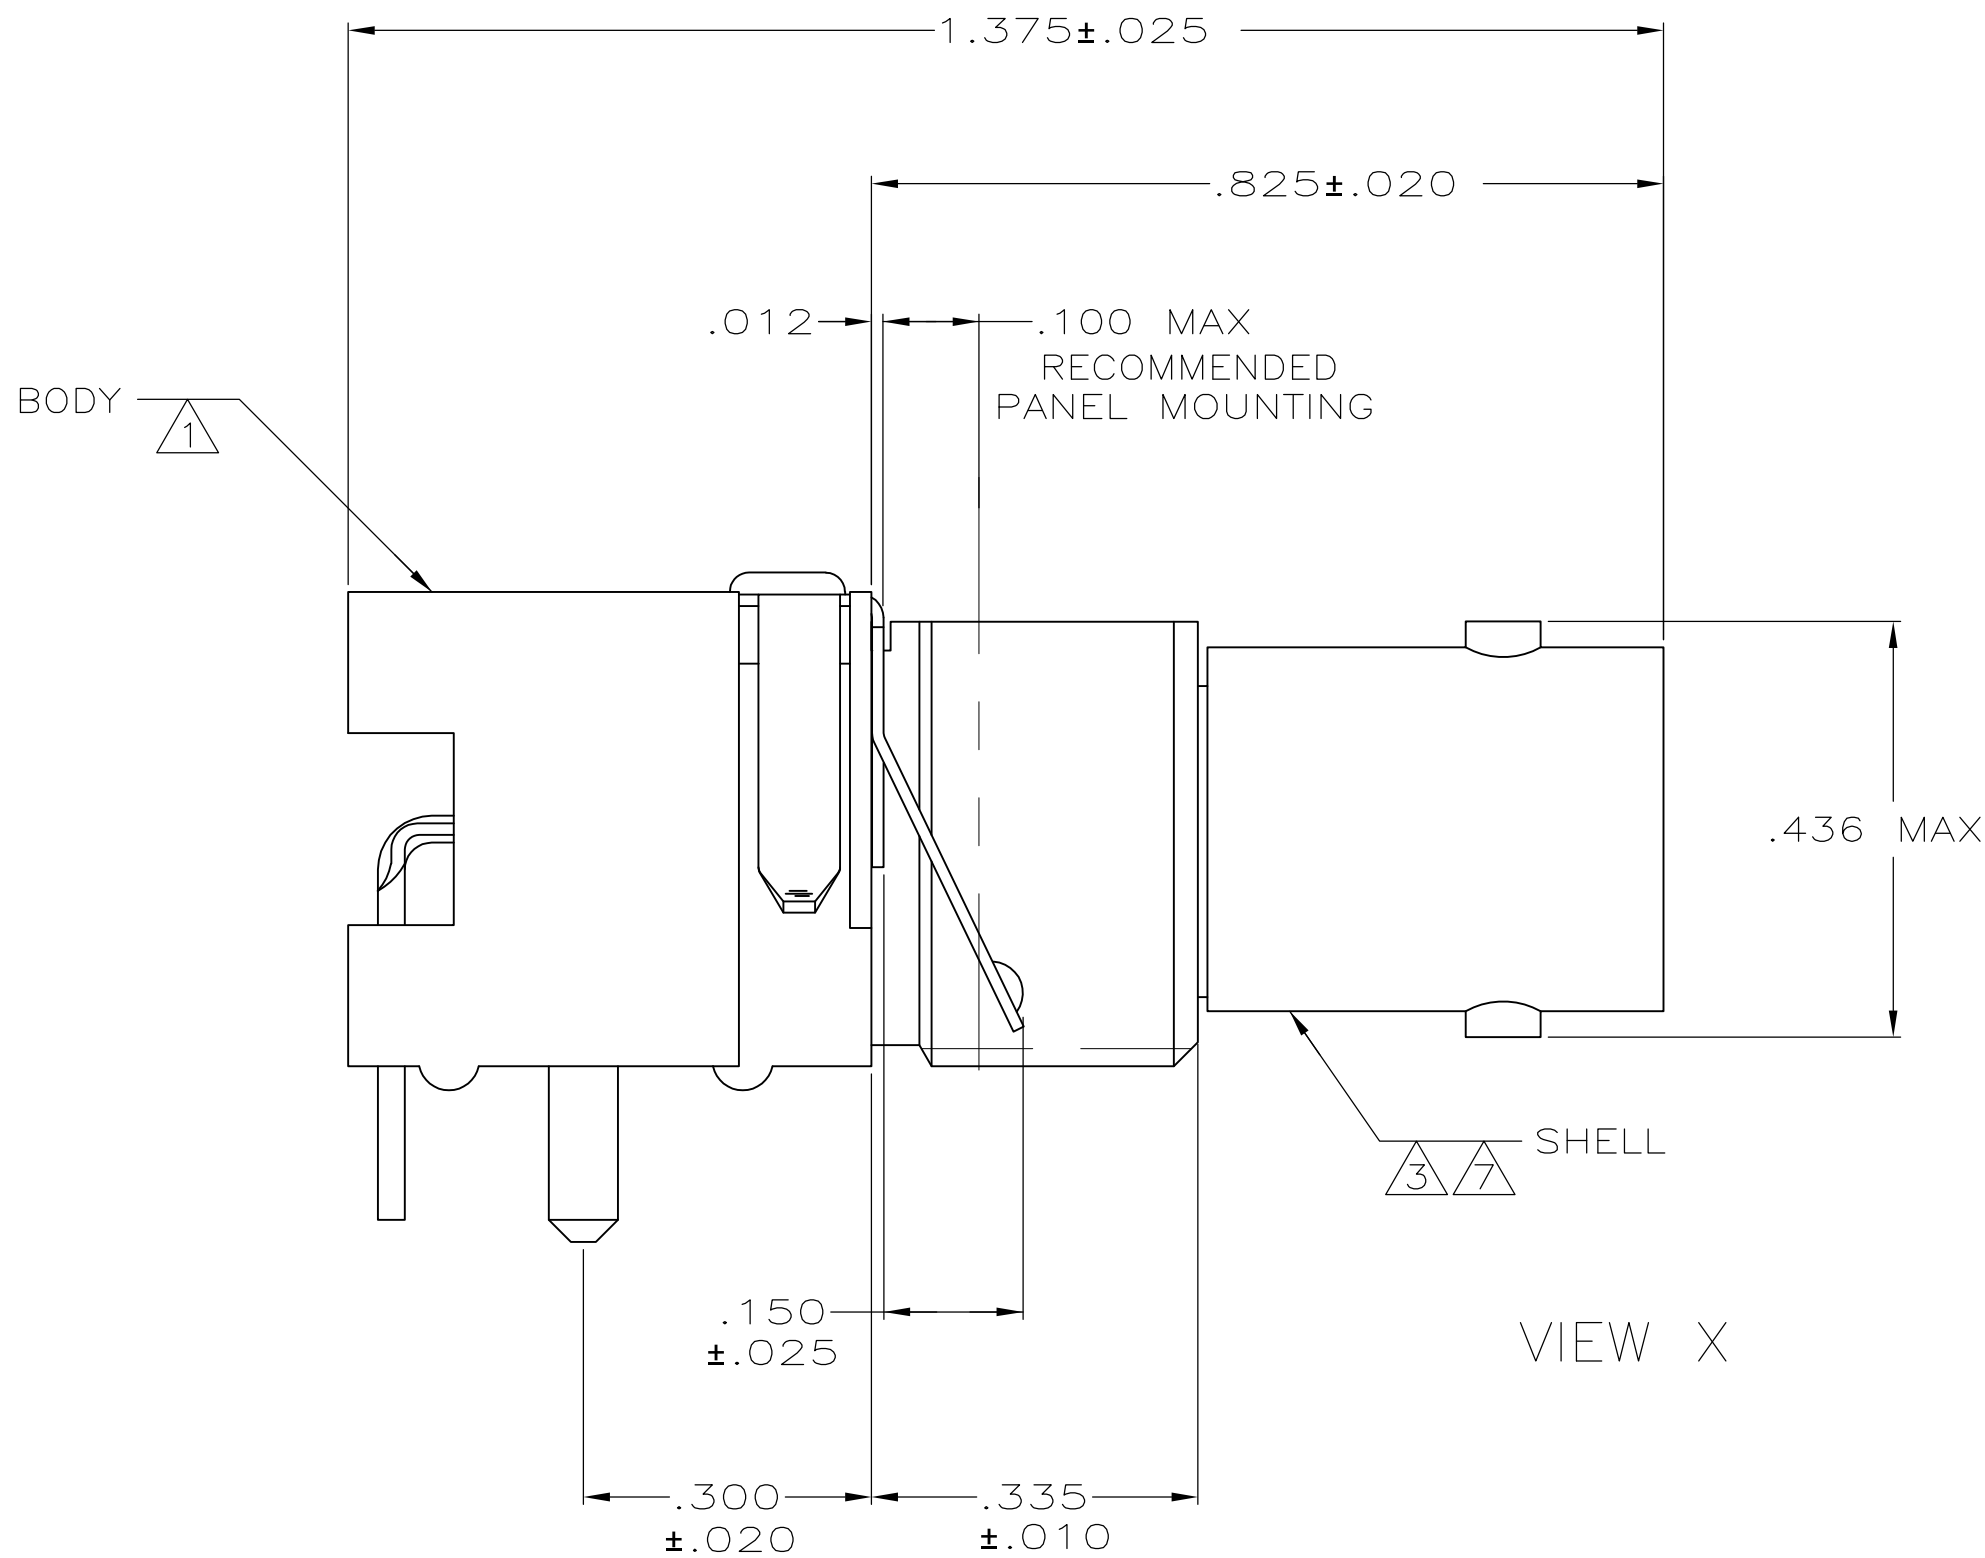

- 1 POLYESTER, PBT, BLACK, PER MIL-M-24519.
- 2 POLYMETHYLPENTENE GENERAL PURPOSE.
- 3 ZINC PER QQ-Z-363.
- 4 PHOSPHOR BRONZE PER QQ-B-750.
- 5 BRASS PER QQ-B-626.
- 6 BRASS PER ASTM-B-453.
- 7 NICKEL PL PER QQ-N-290.
- 8 TIN PLATE PER ASTM-B-545.
- 9 TIN PLATE PER ASTM-B-545.
- 10 SELECTIVELY GOLD PLATED ON INTERFACE AREA PER MIL-G-45204, .000030 THK, TIN PLATED ON SOLDER TAIL PER ASTM-B-545, ALL OVER NICKEL PL PER QQ-N-290.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

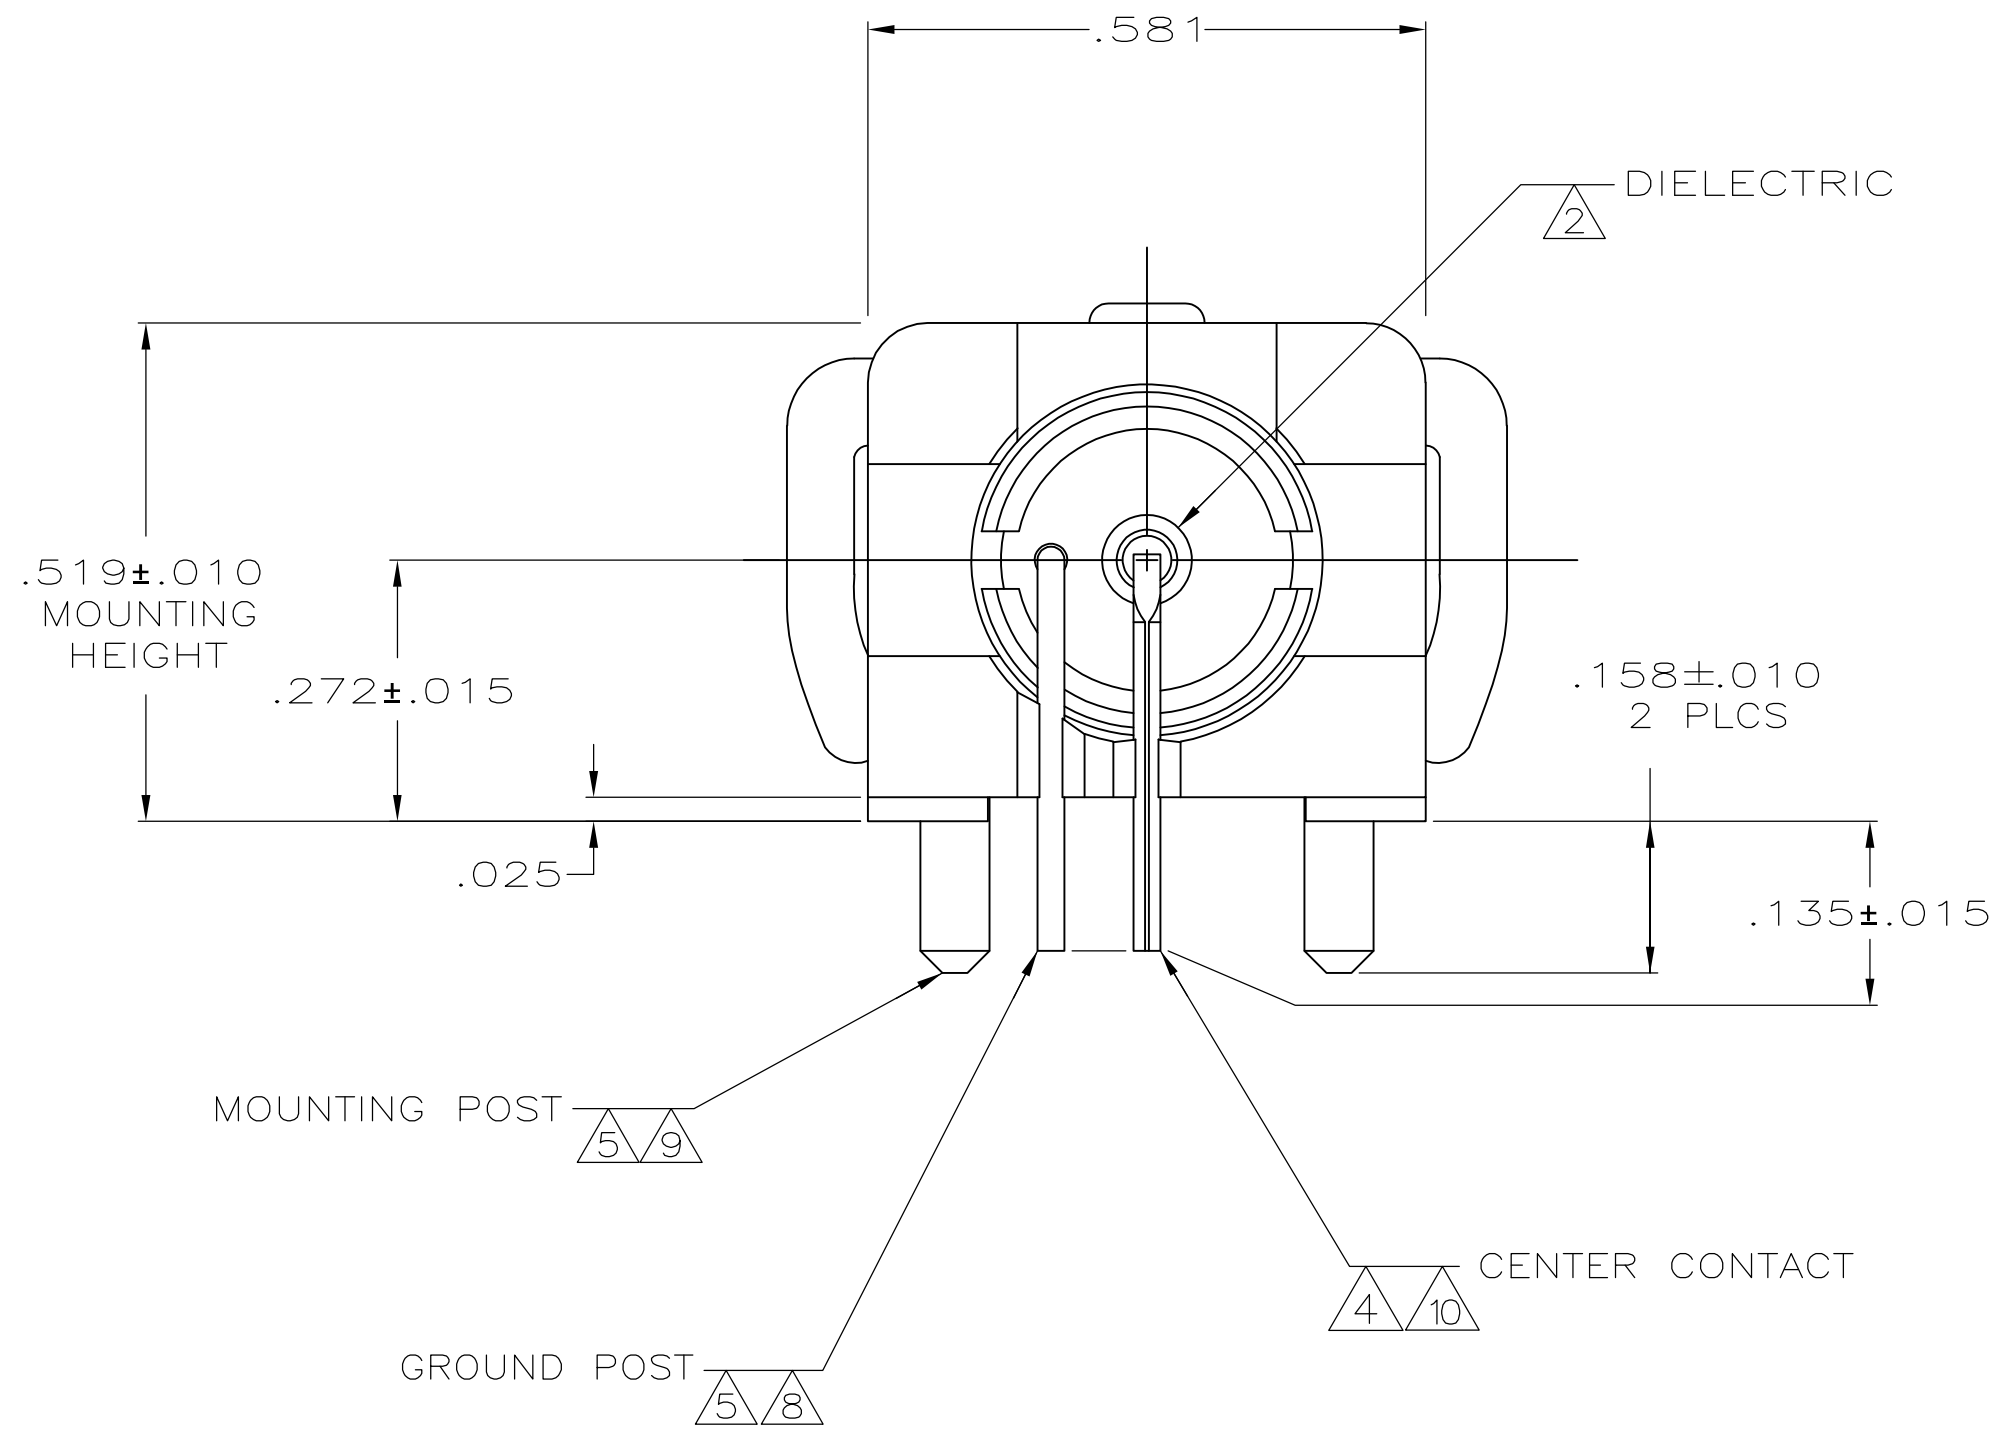

OBSOLETE	-	VIEW X	VIEW X	1000 pf, 2200 VDC	1-413515-1
	-	VIEW X OR Y	VIEW X	9400 pf, 1500 VDC	1-413515-0
SUPERSEDED BY 413515-2	.110	VIEW Z	VIEW X	9400 pf, 1500 VDC	413515-9
	.185	VIEW Z	VIEW X	9400 pf, 1500 VDC	413515-8
SUPERCEDED BY 5413515-8	.110	VIEW Z	VIEW X	7900 pf, 1600 VDC	413515-7
	.185	VIEW Z	VIEW X	7900 pf, 1600 VDC	413515-6
SUPERSEDED BY 413515-7	-	VIEW X OR Y	VIEW Y	9400 pf, 1500 VDC	413515-5
SUPERSEDED BY 413515-2	-	VIEW X OR Y	VIEW Y	9400 pf, 500 VDC	413515-4
SUPERSEDED BY 413515-2	-	VIEW X OR Y	VIEW X	20000 pf, 500 VDC	413515-3
OBSOLETE	-	VIEW X OR Y	VIEW X	9400 pf, 1500 VDC	413515-2
SUPERSEDED BY 413515-2	-	VIEW X OR Y	VIEW X	9400 pf, 500 VDC	413515-1
L	MOUNTING POST	CLIP	CAPACITANCE & VOLTAGE	PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. KERLIN 5/4/90	Tyco Electronics Corporation Middletown, PA 17057	
DIMENSIONS: INCHES		CHK R. E. RUTH 5/18/90	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P. BIRD 5/18/90	PRODUCT SPEC	
0 PLC ± -		108-1269		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± .008		SIZE		
3 PLC ± -		CAGE CODE		
4 PLC ± -		DRAWING NO		
ANGLES ± -		RESTRICTED TO		
MATERIAL		WEIGHT		
THRU		A1 00779 C=413515		
FINISH		CUSTOMER DRAWING		
THRU		SCALE		
THRU		4:1		
THRU		SHEET		
THRU		1 OF 1		
THRU		REV		
THRU		AB1		