


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0459704105**  
**Status:** **Active**  
**Overview:** searay  
**Description:** SeaRay Plug Assy 10x40x1.9 Tin Voids

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-45970-002 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification AS-45970-990 (PDF)</a>
<a href="#">Product Specification PS-45970-001 (PDF)</a>	<a href="#">Test Summary TS-45970-001 (PDF)</a>
<a href="#">Product Specification PS-45970-002 (PDF)</a>	<a href="#">Test Summary TS-45970-002 (PDF)</a>
<a href="#">Application Specification AS-45970-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

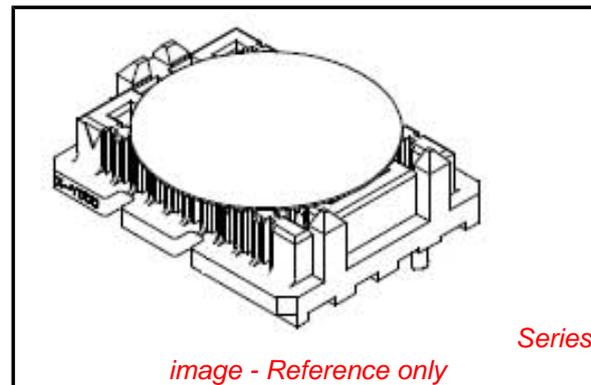

**Agency Certification**

CSA	LR19980
UL	E29179

**General**

Product Family	PCB Receptacles
Series	<u>45970</u>
Application	Board-to-Board, Signal
Overview	<u>searay</u>
Product Name	SEARAY*

**Physical**

Circuits (Loaded)	400
Circuits (maximum)	400
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	4
Orientation	Vertical
PC Tail Length	2.18mm (.086")
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm (.063")
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.27mm (.050")
Pitch - Termination Interface	1.27mm (.050")
Plating min - Mating	0.762µm (30µ")
Plating min - Termination	2.540µm (100µ")
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +125°C
Termination Interface: Style	Surface Mount

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

45970Series

**Mates With**

45971 SEARAY\* Receptacles

**Electrical**

Current - Maximum per Contact	2.7A
Grounding to PCB	No
Voltage - Maximum	240V AC

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	3
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-45970-001, AS-45970-002, AS-45970-990
Product Specification	PS-45970-001, PS-45970-002
Sales Drawing	SD-45970-001, SD-45970-057
Test Summary	TS-45970-001, TS-45970-002

\*SEARAY is a trademark of Samtec, Inc.

This document was generated on 05/23/2011

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**