

Feed-through header - IMC 1,5/16-G-3,81 BK - 1709939

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, number of positions: 16, pitch: 3.81 mm, color: black, contact surface: Tin, mounting: Wave soldering




The figure shows a 10-position version of the product

Your advantages

- Well-known mounting principle allows worldwide use
- Inverted header with socket contacts for touch-proof device outputs or PCB/PCB connections

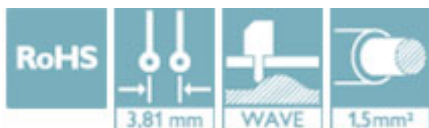

Key Commercial Data

Packing unit	50 pc
GTIN	 4 055626 123479
GTIN	4055626123479

Technical data

Dimensions

Length [l]	14.45 mm
Width	61.75 mm
Pitch	3.81 mm
Width [w]	61.75 mm
Height [h]	10.25 mm
Height	6.85 mm
Length of the solder pin	3.4 mm
Pin dimensions	0.62 x 1.12 mm
Pin spacing	2.54 mm
Length	14.45 mm

General

Range of articles	IMC 1,5/..-G
-------------------	--------------

Feed-through header - IMC 1,5/16-G-3,81 BK - 1709939

Technical data

General

Insulating material group	I
Flammability rating according to UL 94	V0
Color	black
Number of positions	16

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals


Approvals


Approvals


IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

Ex Approvals

Approval details


IECEE CB Scheme		http://www.iecee.org/	DE1-60987-B1B2
Nominal voltage UN	160 V		
Nominal current IN	8 A		

VDE Gutachten mit Fertigungsüberwachung		http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40011723
Nominal voltage UN	160 V		
Nominal current IN	8 A		

EAC		B.01742
-----	---	---------

Feed-through header - IMC 1,5/16-G-3,81 BK - 1709939

Approvals

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-20110128
	D	B	
Nominal voltage UN	300 V	300 V	
Nominal current IN	8 A	8 A	

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>