


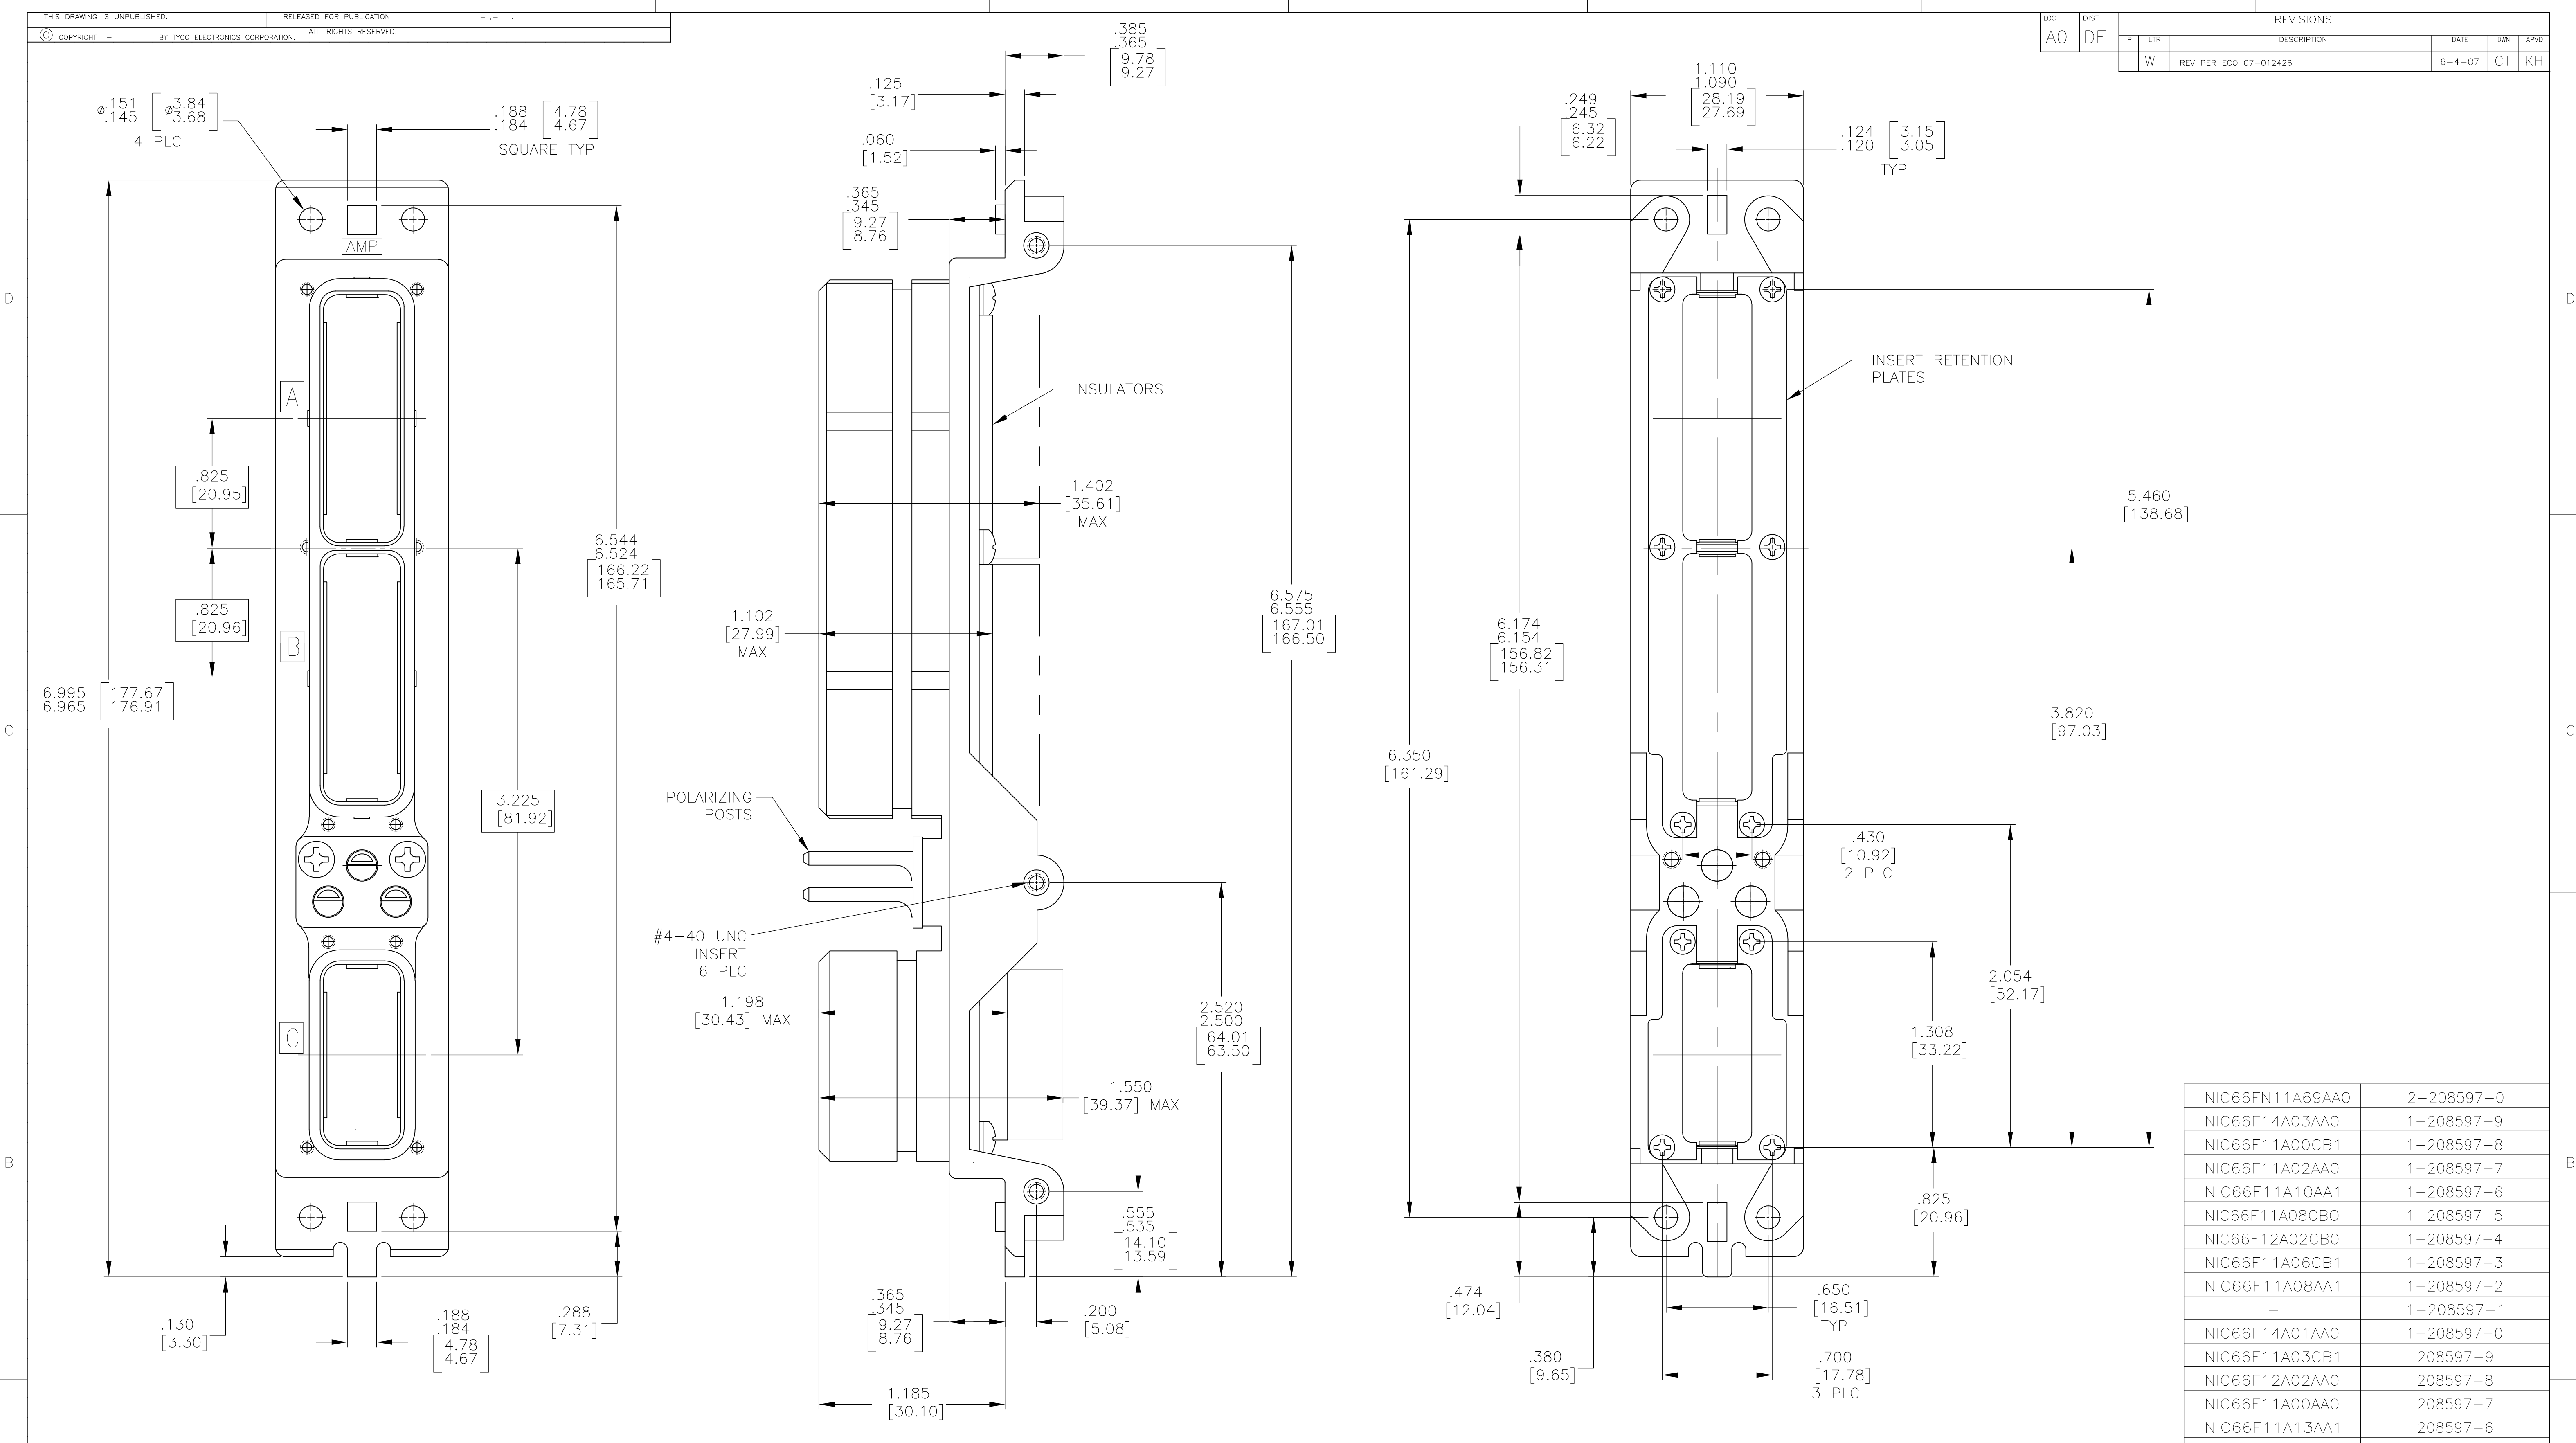

1. CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
2. KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. CONNECTOR SHIPPED WITH KEYING PER ORDERING INSTRUCTIONS. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
3. FOR SHIPMENT CONTACTS (IF ORDERED) ARE INCLUDED IN A CONTAINER WITHIN THE CONNECTOR PACKAGE. COAX CONTACTS ARE NOT SUPPLIED AND MUST BE ORDERED SEPARATELY.
4. FINISH FOR SHELL AND RETENTION PLATES IS ELECTROLESS NICKEL PER MIL-C-26074, CLASS 3 OR 4, GRADE B. (2-208597-0 ONLY)

COMPONENT	MATERIAL	FINISH			NIC66F11A03AA0		208597-4		
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A	4		-		208597-3		
					NIC66F11A01AA1		208597-2		
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A	4		NIC66F11A01AA0		208597-1		
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED			DESCRIPTIVE NUMBER		PART NUMBER		
POLARIZING POSTS	ZINC ALLOY PER ASTM-B-86	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 12-2-05	AMP Tyco Electronics Corporation Harrisburg, PA 17105-3608			
INSERTS	THERMOSET	-	DIMENSIONS: INCHES		CHK K.HOGAN 12-2-05				
FILLER PLUG (IF ORDERED)	TEFLON	-		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD K.HOGAN 12-2-05	NAME			
						PLUG ASSY, SIZE 1, CLASS A, ARINC 600			
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625	MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	SIZE A1	CAGE CODE 00779	DRAWING NO C-208597	RESTRICTED TO -
					CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV W