




# **Multilayer ceramic capacitors**

Array capacitors, COG

Date: October 2006

Ordering code system

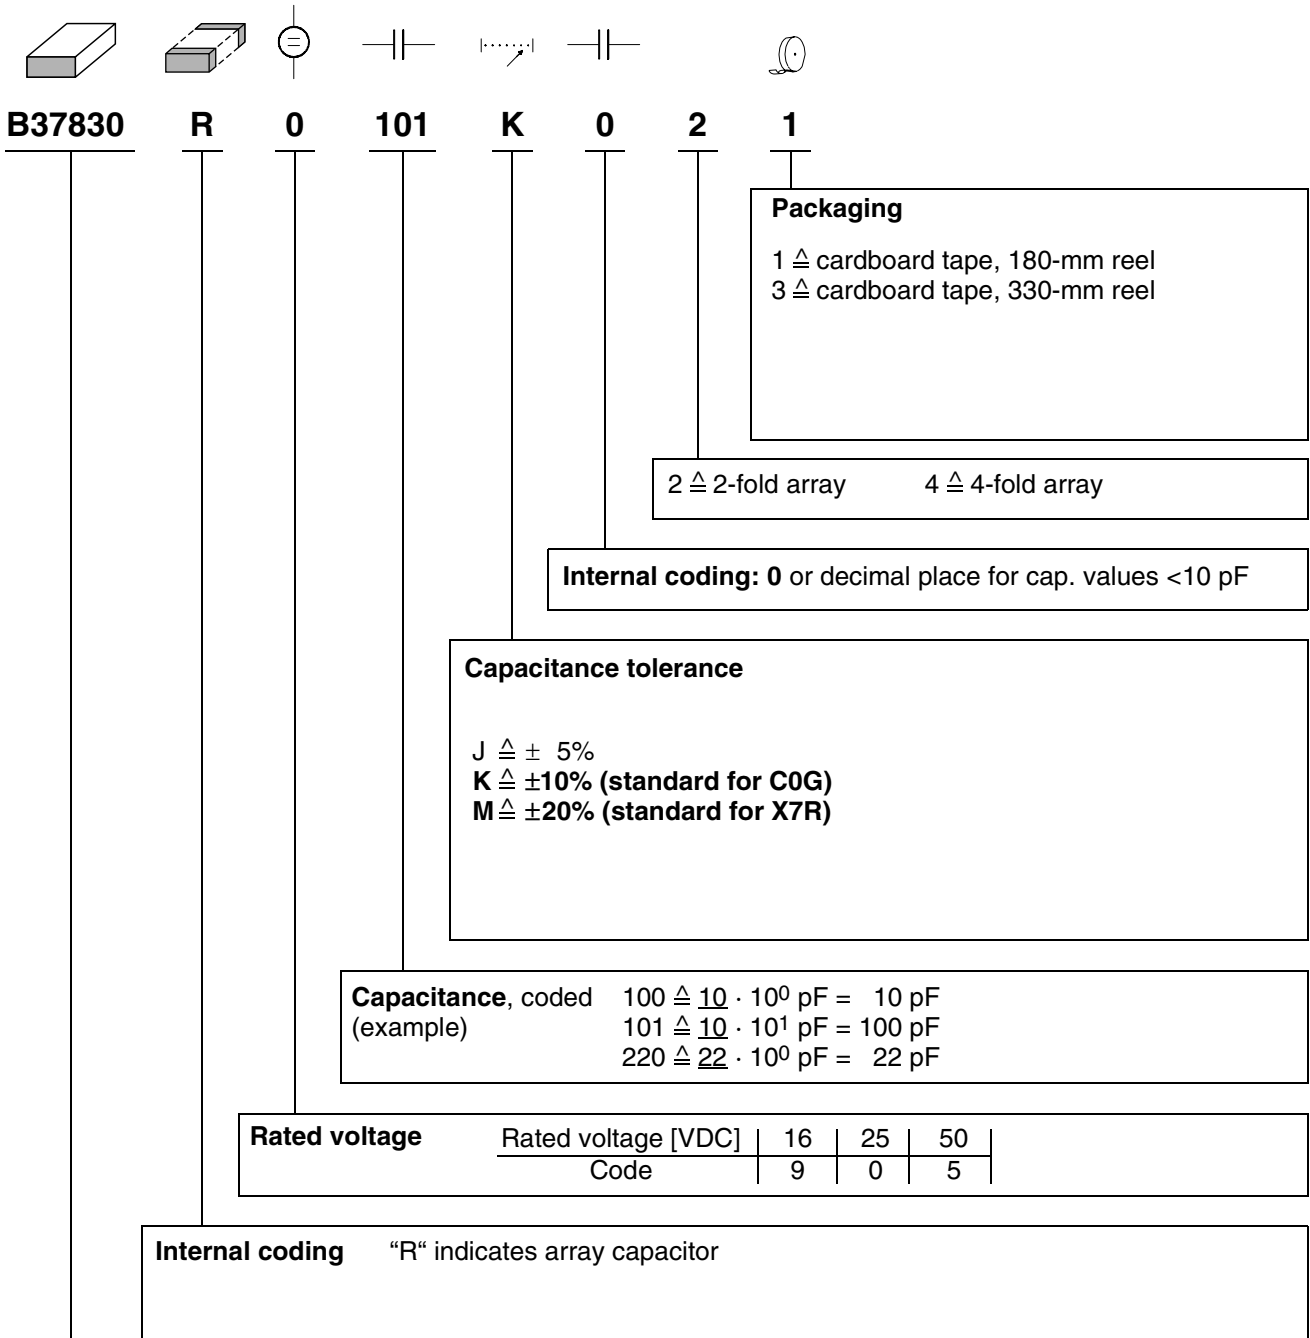

Type and size			
Chip size (inch / mm)	Temperature characteristic		
	C0G	X7R	
<b>0405</b> / 1012	B37830	B37831	
<b>0508</b> / 1220	B37940	B37941	
<b>0612</b> / 1632	B37871	B37872	

**Features**

- Reduction of mounting time and mounting costs
- Space saving on the PCB
- To AEC-Q200

**Applications**

- Suitable for electronic circuits with parallel line layout
- Coupling and filtering, particularly in RF circuits
- Resonant circuits
- Filter circuits

**Termination**

- For soldering: Nickel barrier terminations (Ni)

**Options**

- Alternative capacitance tolerances available on request


**Delivery mode**


- Cardboard tape, 180-mm and 330-mm reel available

**Electrical data**

Temperature characteristic		C0G	
Climatic category (IEC 60068-1)		55/125/56	
Standard		EIA	
Dielectric		Class 1	
Rated voltage	$V_R$	25, 50	VDC
Test voltage	$V_{test}$	$2.5 \cdot V_R/5$ s	VDC
Capacitance range / E series	$C_R$	10 pF ... 1.0 nF (E6)	
Temperature coefficient		$0 \pm 30 \cdot 10^{-6}/K$	
Dissipation factor (limit value)	$\tan \delta$	$<1.0 \cdot 10^{-3}$	
Insulation resistance <sup>1)</sup> at + 25 °C	$R_{ins}$	$>10^5$	MΩ
Insulation resistance <sup>1)</sup> at +125 °C	$R_{ins}$	$>10^4$	MΩ
Time constant <sup>1)</sup> at + 25 °C	$\tau$	$>1000$	s
Time constant <sup>1)</sup> at +125 °C	$\tau$	$>100$	s
Operating temperature range	$T_{op}$	-55 ... +125	°C
Ageing		none	

1) For  $C_R > 10$  nF the time constant  $\tau = C \cdot R_{ins}$  is given.





## Multilayer ceramic capacitors


### C0G

### Capacitance tolerances


Code letter	J	K (standard)
Tolerance	±5%	±10%

### Dimensional drawing

2-fold array (case size 0405)

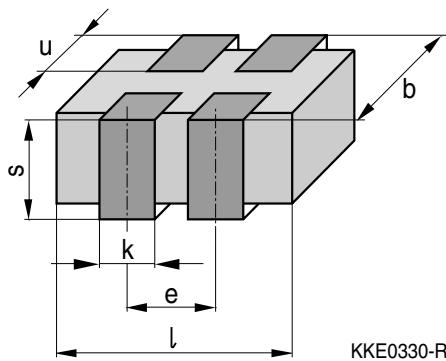


4-fold array (case sizes 0508 and 0612)

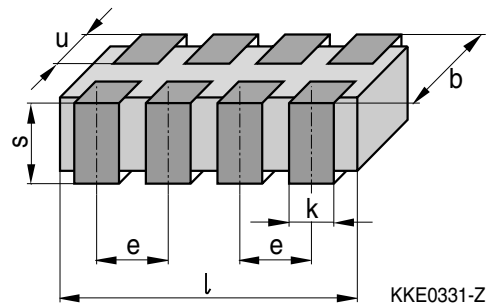

### Dimensions (mm)

	2-fold array	4-fold array	
Case size (inch)	0405	0508	0612
(mm)	1012	1220	1632
l	1.37 ±0.15	2.00 ±0.2	3.20 ±0.2
b	1.00 +0/-0.15	1.25 ±0.15	1.60 ±0.2
s	0.70 max.	0.85 ±0.1	0.85 ±0.1
k	0.36 ±0.1	0.30 ±0.1	0.40 ±0.15
e	0.64	0.50 ±0.1	0.80 ±0.15
u	0.20 ±0.1	0.20 +0.3/-0.1	0.20 +0.3/-0.1

Tolerances to CECC 32101-801





**Multilayer ceramic capacitors**

**COG**

**Recommended solder pad**

2-fold array (case size 0405)


4-fold array (case sizes 0508 and 0612)

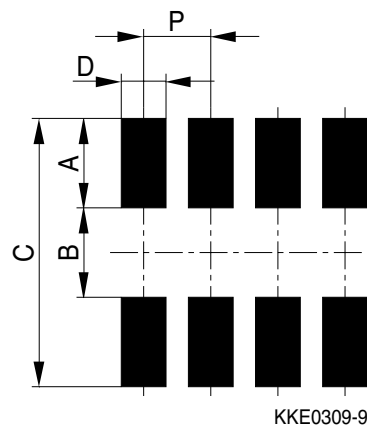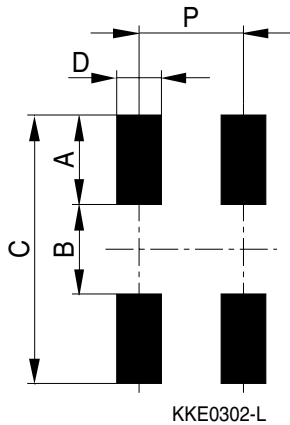


**Recommended dimensions (mm) for reflow soldering**

Case size	(inch/mm)	Type	A	B	C	D	P
0405/1012		2-fold array	0.50 ... 0.55	0.45 ... 0.50	1.45 ... 1.60	0.30 ... 0.35	0.64 ±0.10
0508/1220		4-fold array	0.50 ... 0.70	0.60 ... 0.70	1.60 ... 2.10	0.25 ... 0.35	0.50 ±0.005
0612/1632		4-fold array	0.70 ... 0.90	0.80 ... 1.00	2.20 ... 2.80	0.30 ... 0.40	0.80 ±0.005

**Termination**

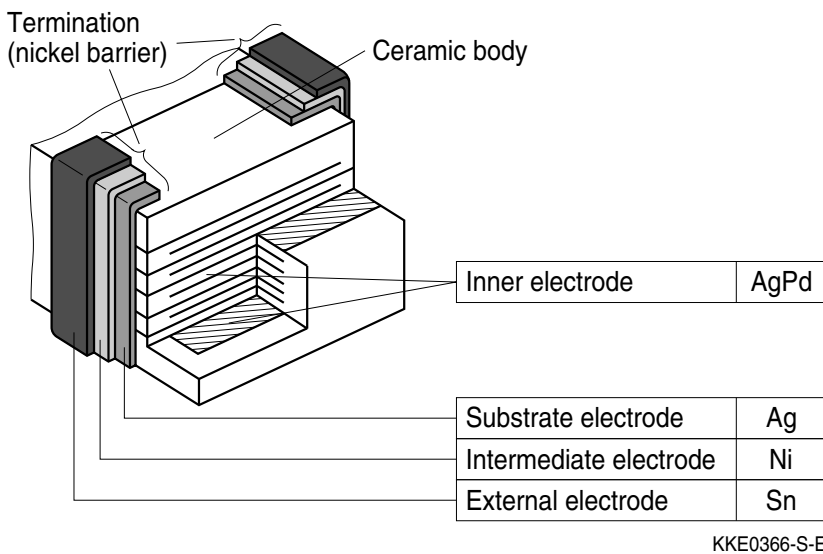




## Multilayer ceramic capacitors

### COG

#### Product range array capacitors, COG

	2-fold arrays		4-fold arrays			
Size <sup>1)</sup>	<b>0405</b>		<b>0508</b>		<b>0612</b>	
inch	1012		1220		1632	
mm	1012		1220		1632	
Type	B37830		B37940		B37871	
$V_R$ (VDC)	25		50		50	
$C_R$						
10 pF						
15 pF						
22 pF						
33 pF						
47 pF						
68 pF						
100 pF						
150 pF						
180 pF						
220 pF						
330 pF						
470 pF						
680 pF						
1.0 nF						

1)  $l \times b$  (inch) /  $l \times b$  (mm)



**Multilayer ceramic capacitors**  
**C0G; 0405**

**Ordering codes and packing for C0G arrays, 25 VDC, nickel barrier terminations**


C <sub>R</sub> <sup>1)</sup>	Ordering code <sup>2)</sup>	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			* $\triangleq$ 1	* $\triangleq$ 3
			pcs/reel	pcs/reel

**Case size 0405, 25 VDC, 2-fold arrays**

10 pF	B37830R0100K02*	0.6 ±0.1	5000	20000
15 pF	B37830R0150K02*	0.6 ±0.1	5000	20000
22 pF	B37830R0220K02*	0.6 ±0.1	5000	20000
33 pF	B37830R0330K02*	0.6 ±0.1	5000	20000
47 pF	B37830R0470K02*	0.6 ±0.1	5000	20000
68 pF	B37830R0680K02*	0.6 ±0.1	5000	20000
100 pF	B37830R0101K02*	0.6 ±0.1	5000	20000
150 pF	B37830R0151K02*	0.6 ±0.1	5000	20000
180 pF	B37830R0181K02*	0.6 ±0.1	5000	20000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.  
For other available capacitance tolerances see page 128.



## Multilayer ceramic capacitors

### C0G; 0508 and 0612

#### Ordering codes and packing for C0G arrays, 50 VDC, nickel barrier terminations

C <sub>R</sub> <sup>1)</sup>	Ordering code <sup>2)</sup>	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			* $\triangleq$ 1	* $\triangleq$ 3
			pcs/reel	pcs/reel

#### Case size 0508, 50 VDC, 4-fold arrays

10 pF	B37940R5100K04*	0.85 ±0.1	4000	16000
15 pF	B37940R5150K04*	0.85 ±0.1	4000	16000
22 pF	B37940R5220K04*	0.85 ±0.1	4000	16000
33 pF	B37940R5330K04*	0.85 ±0.1	4000	16000
47 pF	B37940R5470K04*	0.85 ±0.1	4000	16000
68 pF	B37940R5680K04*	0.85 ±0.1	4000	16000
100 pF	B37940R5101K04*	0.85 ±0.1	4000	16000
150 pF	B37940R5151K04*	0.85 ±0.1	4000	16000
220 pF	B37940R5221K04*	0.85 ±0.1	4000	16000


#### Case size 0612, 50 VDC, 4-fold arrays

10 pF	B37871R5100K04*	0.85 ±0.1	4000	16000
15 pF	B37871R5150K04*	0.85 ±0.1	4000	16000
22 pF	B37871R5220K04*	0.85 ±0.1	4000	16000
33 pF	B37871R5330K04*	0.85 ±0.1	4000	16000
47 pF	B37871R5470K04*	0.85 ±0.1	4000	16000
68 pF	B37871R5680K04*	0.85 ±0.1	4000	16000
100 pF	B37871R5101K04*	0.85 ±0.1	4000	16000
150 pF	B37871R5151K04*	0.85 ±0.1	4000	16000
220 pF	B37871R5221K04*	0.85 ±0.1	4000	16000
330 pF	B37871R5331K04*	0.85 ±0.1	4000	16000
470 pF	B37871R5471K04*	0.85 ±0.1	4000	16000
680 pF	B37871R5681K04*	0.85 ±0.1	4000	16000
1.0 nF	B37871R5102K04*	0.85 ±0.1	4000	16000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.  
For other available capacitance tolerances see page 128.






**Multilayer ceramic capacitors**


**COG**

**Typical characteristics<sup>1)</sup>**


Capacitance change  $\Delta C/C_{25}$  versus temperature T (tolerance range )

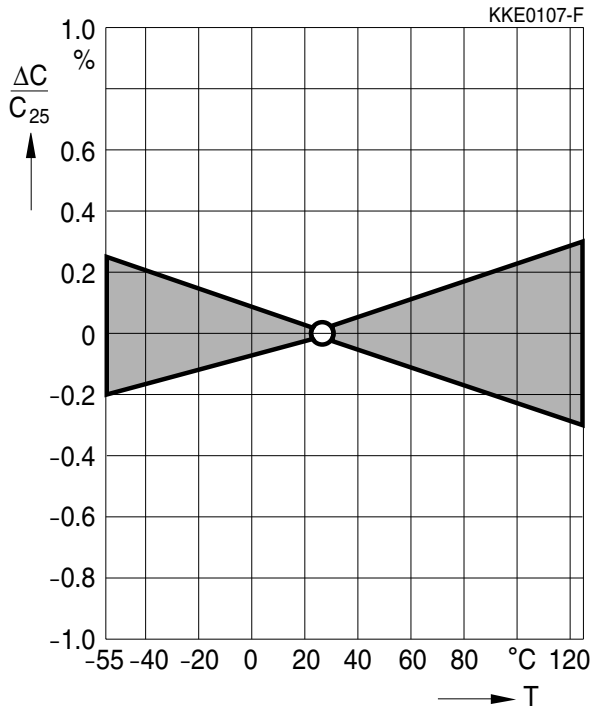


Capacitance change  $\Delta C/C_0$  versus superimposed DC voltage V

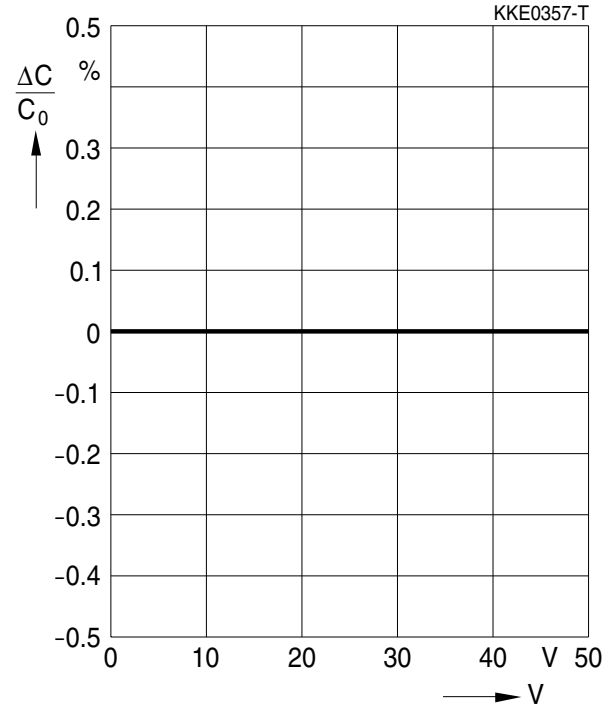


Impedance |Z| versus frequency f

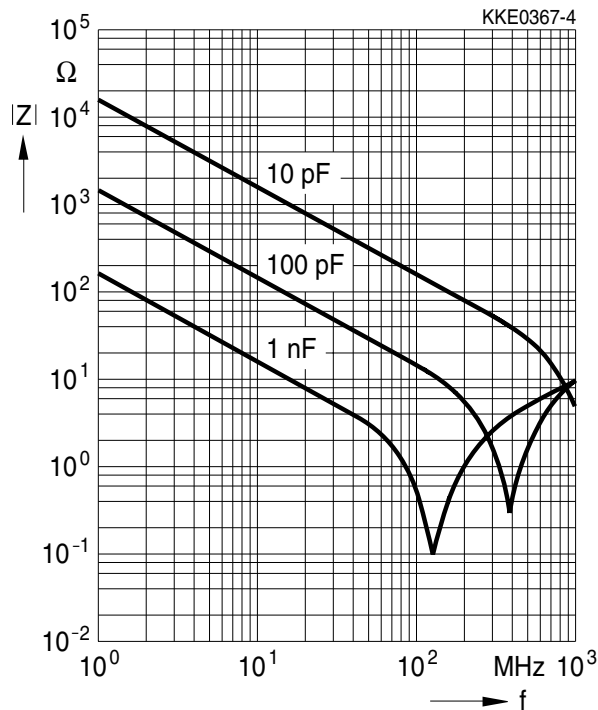

Dissipation factor tan δ versus temperature T

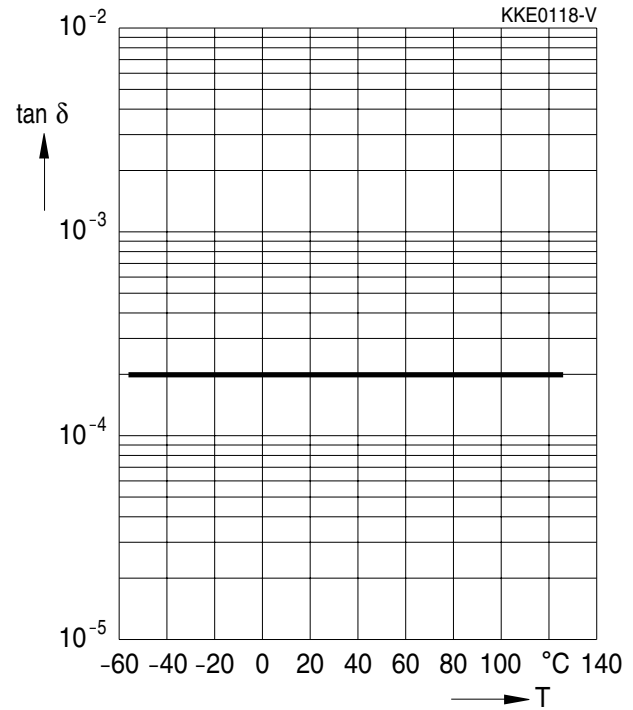

1) For more detailed information on frequency behavior and characteristics see [www.epcos.com/mlcc\\_impedance](http://www.epcos.com/mlcc_impedance).




## Multilayer ceramic capacitors


### COG

#### Typical characteristics<sup>1)</sup>

Insulation resistance  $R_{ins}$  versus temperature  $T$

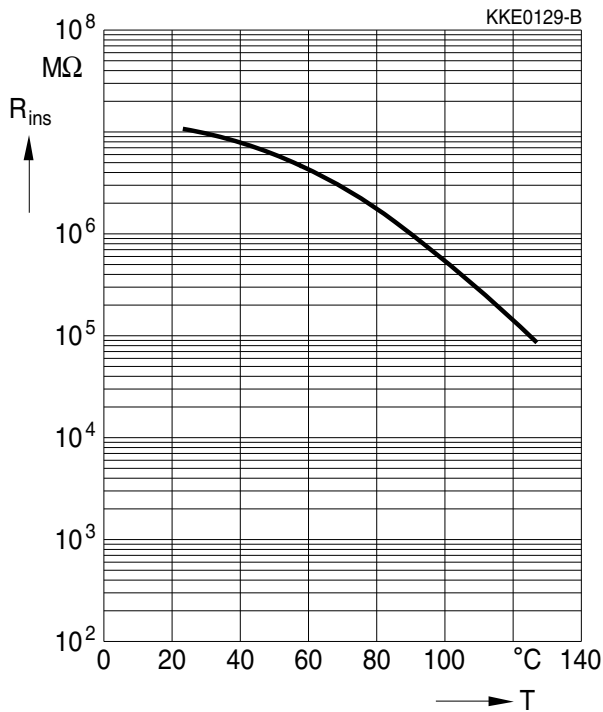

Capacitance change  $\Delta C/C_1$  versus time  $t$

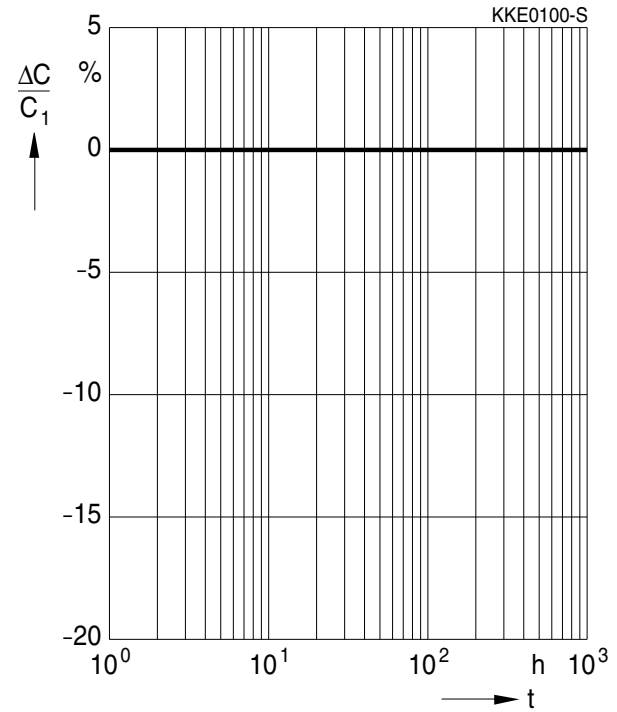

1) For more detailed information on frequency behavior and characteristics see [www.epcos.com/mlcc\\_impedance](http://www.epcos.com/mlcc_impedance).

### Notes on the selection of ceramic capacitors

In the selection of ceramic capacitors, the following criteria must be considered:

1. Depending on the application, ceramic capacitors used to meet high quality requirements should at least satisfy the specifications to AEC-Q200. They must meet quality requirements going beyond this level in terms of ruggedness (e.g. mechanical, thermal or electrical) in the case of critical circuit configurations and applications (e.g. in safety-relevant applications such as ABS and airbag equipment or durable industrial goods).
2. At the connection to the battery or power supply (e.g. clamp 15 or 30 in the automobile) and at positions with stranding potential, to reduce the probability of short circuits following a fracture, two ceramic capacitors must be connected in series and/or a ceramic capacitor with integrated series circuit should be used. The MLSC from EPCOS contains such a series circuit in a single component.
3. Ceramic capacitors with the temperature characteristics Z5U and Y5V do not satisfy the requirements to AEC-Q200 and are mechanically and electrically less rugged than C0G or X7R/X8R ceramic capacitors. In applications that must satisfy high quality requirements, therefore, these capacitors should not be used as discrete components (see the chapter “Effects on mechanical, thermal and electrical stress”, point 1.4).
4. For ESD protection, preference should be given to the use of multilayer varistors (MLV) (see the chapter “Effects on mechanical, thermal and electrical stress”, point 1.4).
5. An application-specific derating or continuous operating voltage must be considered in order to cushion (unexpected) additional stresses (see the chapter “Reliability”).

### The following should be considered in circuit board design

1. If technically feasible in the application, preference should be given to components having an optimal geometrical design.
2. At least FR4 circuit board material should be used.
3. Geometrically optimal circuit boards should be used, ideally those that cannot be deformed.
4. Ceramic capacitors must always be placed a sufficient minimum distance from the edge of the circuit board. High bending forces may be exerted there when the panels are separated and during further processing of the board (such as when incorporating it into a housing).
5. Ceramic capacitors should always be placed parallel to the possible bending axis of the circuit board.
6. No screw connections should be used to fix the board or to connect several boards. Components should not be placed near screw holes. If screw connections are unavoidable, they must be cushioned (for instance by rubber pads).

**The following should be considered in the placement process**

1. Ensure correct positioning of the ceramic capacitor on the solder pad.
2. Caution when using casting, injection-molded and molding compounds and cleaning agents, as these may damage the capacitor.
3. Support the circuit board and reduce the placement forces.
4. A board should not be straightened (manually) if it has been distorted by soldering.
5. Separate panels with a peripheral saw, or better with a milling head (no dicing or breaking).
6. Caution in the subsequent placement of heavy or leaded components (e.g. transformers or snap-in components): danger of bending and fracture.
7. When testing, transporting, packing or incorporating the board, avoid any deformation of the board not to damage the components.
8. Avoid the use of excessive force when plugging a connector into a device soldered onto the board.
9. Ceramic capacitors must be soldered only by the mode (reflow or wave soldering) permissible for them (see the chapter "Soldering directions").
10. When soldering the most gentle solder profile feasible should be selected (heating time, peak temperature, cooling time) in order to avoid thermal stresses and damage.
11. Ensure the correct solder meniscus height and solder quantity.
12. Ensure correct dosing of the cement quantity.
13. Ceramic capacitors with an AgPd external termination are not suited for the lead-free solder process: they were developed only for conductive adhesion technology.

This listing does not claim to be complete, but merely reflects the experience of EPCOS AG.

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, EPCOS-JONES, Baoke, CeraDiode, CSSP, MLSC, PhaseCap, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).



Поставка электронных компонентов

**Юридический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.

**Фактический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.  
ИНН 780277764  
КПП 780501001

Р/С 40702810422510004035 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в Санкт-Петербурге К/С 30101810900000000703  
БИК 044030703

**Телефон:** 8 (812) 309-44-11 (многоканальный)

**Факс:** 8 (812) 309-44-11

**Электронная почта:** [sales@timechips.ru](mailto:sales@timechips.ru)

**Сайт:** [timechips.ru](http://timechips.ru)

## Информационное письмо

Компания «ТаймЧипс» - одна из наиболее динамично развивающихся компаний в сфере поставок электронных компонентов. Мы поставляем широкую номенклатуру электронных компонентов отечественных и импортных производителей, как напрямую, так и с крупных мировых складов, позволяющих охватить выборочную номенклатуру более 300 брендов, а также специализируемся на поставках дисплеев и является официальным дистрибьютором компании Shenzhen Startek Electronic Technology Co, на территории Российской Федерации.

Наличие собственной логистики позволяет в кратчайшие сроки доставлять товар нашим клиентам. В нашей компании имеется Конструкторский отдел, где наши специалисты проводят технические консультации клиентов, квалифицированную поддержку и помощь российским разработчикам. Осуществляем Поставки импортной продукции под контролем ВП МО РФ, на предприятия Оборонно-промышленного комплекса России. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001-2011.

Благодаря нацеленности на результат, мы уверенно занимаем новые позиции на рынке, заинтересовывая Клиента не только актуальными ценами и гибким подходом, но и постоянным вниманием.

**Миссия** – обеспечение долгосрочного и взаимовыгодного партнерства с клиентами.

**Наша цель** – Обеспечение клиентам самого широкого ассортимента электронных компонентов и бесперебойности поставок.

**Мы - это развитие! Мы задаем темп! Мы разные, но вместе! Мы работаем для вас!**

Так же имеем прямые поставки от производителей:

TAI-SAW Пав-компоненты ([www.taisaw.com](http://www.taisaw.com))

TRANSCOM СВЧ-компоненты ([www.transcominc.com.tw](http://www.transcominc.com.tw))

Mini Circuits ВЧ-СВЧ-компоненты ([minicircuits.com](http://minicircuits.com))

SAMTEC- разъемы ([www.samtec.com](http://www.samtec.com))

4Star Разъемы РЧ (Даташиты по продукции 4Star, которые Вы сможете загрузить по этой ссылке: <https://yadi.sk/i/tPjnmGGrpmbYj>)

ULNION Преобразователи напряжения ([converterdc.com/](http://converterdc.com/))

**Отличные рекомендации на рынке, уверенность в качестве поставляемой продукции делают нас надежными партнерами для наших клиентов.**

**«ТаймЧипс» - это:**

- Гарантия качества поставляемой продукции;
- Широкий ассортимент;
- Минимальные сроки поставок;
- Техническая поддержка;
- Подбор комплектации;
- Индивидуальный подход;
- Гибкие цены.

**Модули, микросхемы, пассивные компоненты, Xilinx (XC), Altera (EP,EPF, EPM) и силовая электроника** – это наши ведущие позиции, на поставку которых мы гарантированно дадим Вам самые выгодные предложения!

**В структуру компании так же входит конструкторский отдел, который помогает разработчикам и конструкторам в решении следующих задач:**

- Оценка стоимости проекта по компонентам;
- Подбор оптимального решения при выборе компонента;
- Подбор аналогов;
- Техническая поддержка;
- Консультации у производителей;
- Поставка прототипов;

*С Уважением, Чернов Павел.*

*Руководитель отдела продаж ООО "ТАЙМЧИПС"*

*Официальный дистрибьютор Shenzhen Startek Electronic Technology Co.,Ltd в России (USB Display Modules , LED Displays, Serial Modules).*

<http://www.timechips.ru/>

<http://lcd-timechips.ru/>

**Телефон: +7 (812) 309-44-11 доб. 141**

**Факс: +7 (812) 309-44-11 доб. 152**

**Моб. Тел. +7 (905) 232-40-65**

**Skype: time.chips5**

**Электронная почта: [manager1@timechips.ru](mailto:manager1@timechips.ru)**

---