

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0768603036](#)
Status: **Active**
Overview: [Impact™ Backplane Connector and Cable Assembly System](#)
Description: [Impact™ 100 Ohm 3 Pair Right Angle Orthogonal Daughtercard, Right Guide, 6 Columns, 54 Circuits, Plated Through Hole Dimension 0.39mm, Lead-Free](#)

Documents:

3D Model	Application Specification AS-76850-990 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-591 (PDF)
Product Specification PS-76060-999 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-76060-9999 (PDF)	

Agency Certification


UL E29179

General

Product Family	Backplane Connectors
Series	76860
Application	Daughtercard, Orthogonal, Orthogonal Direct, Orthogonal Midplane
Application Tooling Documents	TM-622018799
Component Type	PCB Receptacle
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	884982167223

Physical

Circuits (Loaded)	54
Circuits (maximum)	54
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	7.472/g
Number of Columns	6
Number of Pairs	3
Number of Rows	9
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm, 2.15mm
Pitch - Termination Interface	1.90mm, 2.15mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +85°C

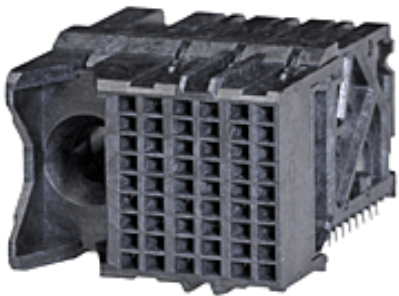

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/79/2015 (17
December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS
ELV

Green Image
Not Relevant

Search Parts in this Series

[76860](#) Series

Mates With

[76855](#) Impact™ 100 Ohm Backplane Header

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Impact Daughter Card Extraction Tool	0622024300
Impact™ Daughter Card Module Removal Tool	0622024600

Termination Interface: Style	Through Hole - Compliant Pin	Press-In Tool for Daughter Card	<u>0622018744</u>
Electrical			
Current - Maximum per Contact	0.75A		
Data Rate	25.0 Gbps		
Impedance	100#		
Shield Type	N/A		
Shielded	No		
Voltage - Maximum	30V AC (RMS)/DC		
Material Info			
Reference - Drawing Numbers			
Application Specification	AS-76060-9999, AS-76850-990		
Electrical Model Document	EE-76860-049, EE-76860-055		
Packaging Specification	PK-70873-591		
Product Specification	PS-76060-999		
S-Parameter Model	SP-76860-049, SP-76860-055		
Sales Drawing	SD-76860-002		
Symbol/Footprint Data	SYM-76860-3036		

This document was generated on 06/10/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION