



## Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	Green LED steady Orange LED steady Red LED steady
[Us] rated supply voltage	100...240 V
Supply circuit type	AC

## Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover)
Product mounting	On base
Cable cross section	0 in <sup>2</sup> (0.33 mm <sup>2</sup> ) 0 in <sup>2</sup> (0.83 mm <sup>2</sup> )
AWG gauge	AWG 18 AWG 22
Cable length	29.53 in (750 mm) 33.46 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	60 mA
Product weight	1.21 lb(US) (0.55 kg)
Height	12.28 in (312 mm)

## Environment

standards	EN/IEC 60947-1 EN/IEC 60947-5-1
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-31...158 °F (-35...70 °C)
ambient air temperature for operation	14...122 °F (-10...50 °C)
electrical shock protection class	Class I conforming to EN/IEC 61140
IP degree of protection	IP54 in flat surface installation conforming to EN/IEC 60529

## Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0808 - Schneider Electric declaration of conformity	Compliant - since 0808 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Lead and lead compounds, which is known to the State	Lead and lead compounds, which is known to the State of California to cause cancer

of California to cause cancer and birth defects or other reproductive harm. and birth defects or other reproductive harm.

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov) For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


Contractual warranty

Warranty period	18 months
-----------------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

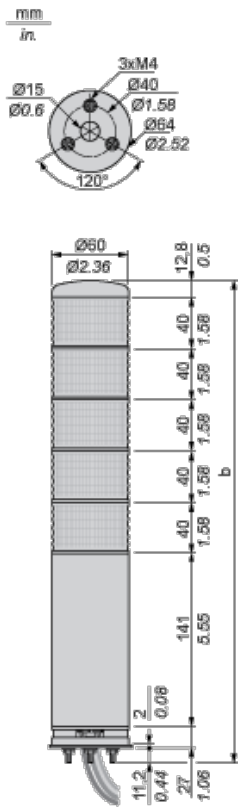

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

