

**650JS001 - 650JS002**  
**Dummy Storage Receptacles - Bayonet**  
**MIL-C-81511 Series I, II, III and IV**



65

**MIL-C-81511 Series I & III**

**650JS001 M 16**

Basic Part No. \_\_\_\_\_

Finish (Table IV) \_\_\_\_\_

Shell Size \_\_\_\_\_



**MIL-C-81511 Series II & IV**

**650JS002 M 16**

Basic Part No. \_\_\_\_\_

Finish (Table IV) \_\_\_\_\_

Shell Size \_\_\_\_\_

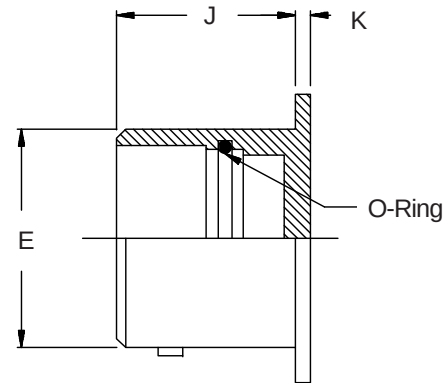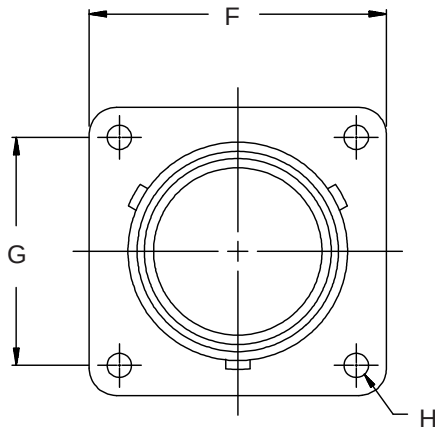

**TABLE III: DIMENSIONS**

| Shell Size | E Dia        | F Max        | G            | H Max      | J           | K          |
|------------|--------------|--------------|--------------|------------|-------------|------------|
| 08         | .553 (14.0)  | .820 (20.8)  | .599 (15.2)  | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 10         | .678 (17.2)  | .945 (24.0)  | .724 (18.4)  | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 14         | .928 (23.6)  | 1.133 (28.8) | .911 (23.1)  | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 16         | 1.054 (26.8) | 1.258 (32.0) | .974 (24.7)  | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 18         | 1.178 (29.9) | 1.351 (34.3) | 1.067 (27.1) | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 20         | 1.303 (33.1) | 1.475 (37.5) | 1.161 (29.5) | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 22         | 1.428 (36.3) | 1.570 (39.9) | 1.255 (31.9) | .126 (3.2) | .645 (16.4) | .070 (1.8) |
| 24         | 1.553 (39.4) | 1.711 (43.5) | 1.380 (35.1) | .153 (3.9) | .645 (16.4) | .070 (1.8) |

**TABLE IV: STANDARD FINISHES**

| Glenair Symbol | Military Ref. | Finish                         |
|----------------|---------------|--------------------------------|
| N              | 1             | Cadmium Olive Drab over Nickel |
| M              | 2             | Electroless nickel             |

1. For complete dimensions see Military Standard MIL-C-81511/19 and /30.
2. Metric dimensions (mm) are indicated in parentheses.