

PRODUCT DATASHEET FA10750_LO2-M

LO2-M

~25° medium beam optimized for Osram Golden Dragon+. 14.6 mm high assembly with installation tape.

TECHNICAL SPECIFICATIONS:

Dimensions Ø 21.6 mm Height 14.6 mm

Fastening tape

ROHS compliant yes 1



MATERIAL SPECIFICATIONS:

Material Colour **Finish** Component **Type** LO2-M **PMMA** Single lens LO-LH1-TAPE Holder PC black LEILA-TAPE Tape PU tape 0,2mm black

ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg)


FA10750_LO2-M Single lens 2304 288 144 11.4

» Box size:



PRODUCT DATASHEET

FA10750_LO2-M

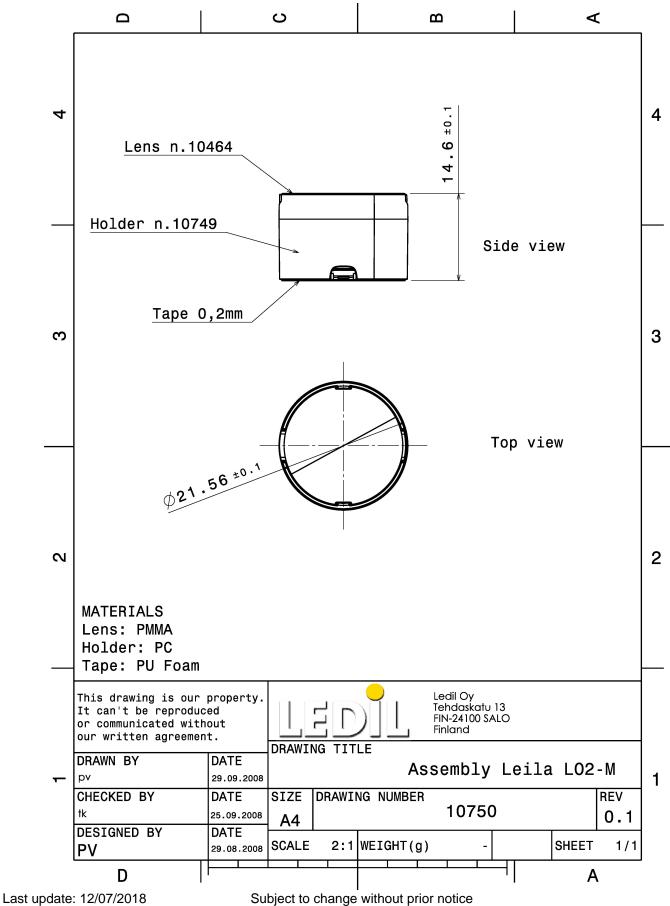

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.



PRODUCT DATASHEET FA10750_LO2-M

PHOTOMETRIC DATA (MEASURED):

OSRAM Opto Semiconductors

LED Golden Dragon+

FWHM 26.0°
Efficiency 88 %
LEDs/each optic 1
Light colour White
Required components:

PRODUCT DATASHEET FA10750_LO2-M

PHOTOMETRIC DATA (SIMULATED):

CREE 💠		90"
LED	XP-G3	75'
FWHM	26.0°	200
Efficiency	83 %	
Peak intensity	3.4 cd/lm	1500
LEDs/each optic	1	
Light colour	White	
Required compone	nts:	2500
		30° 0° 13° 00°
OSRAM Opto Semiconductors		50*
LED	Duris S8	77'
FWHM	30.0°	
Efficiency	78 %	
Peak intensity	2.1 cd/lm	
LEDs/each optic	1	
Light colour	White	25° C
Required compone	nts:	160



PRODUCT DATASHEET FA10750_LO2-M

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy