

Features

- Low Loss
- Excellent Low Side Rejection
- Small Size

Description

Surface mount, silver (Ag) coated ceramic filter. Developed for use in InMarSat applications.

Weight: 1.2 grams typical.

Material: Filter is composed of a ceramic block plated with Ag.

Filter complies with RoHS standards.




Electrical Specifications

Parameter	Frequency (MHz)	Typical @ 25°C	Spec. @ 25°C	Spec. Over -40°C to +85°C
Passband Insertion Loss	1626.5 to 1660.5	1.36 dB	2.2 dB max	2.5 dB max
Passband Ripple	1626.5 to 1660.5	0.4 dB	0.8 dB max	1.0 dB max
Passband Return Loss @ Input	1626.5 to 1660.5	14.0 dB	10.0 dB min	9.5 dB max
Attenuation:	1576.5	38.0 dB	30.5 dB min	30.0 dB max
	1751.5	26.9 dB	24.5 dB min	24.0 dB max
Power into any port		1 Watt Max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

Mechanical Drawing

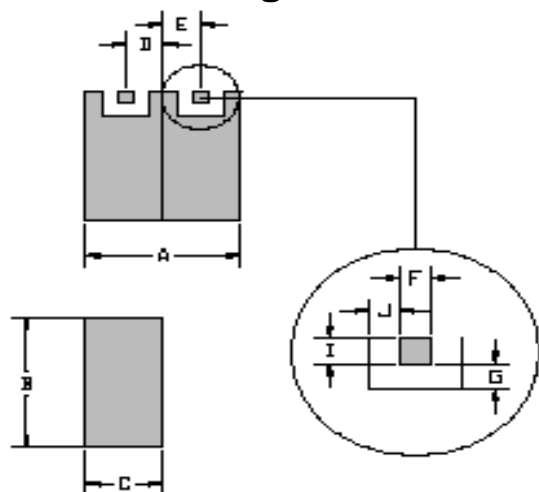


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	11.748	Max
B	7.29	Max
C	4.496	Max
D	3.302	0.13
E	3.302	0.13
F	1.27	0.13
G	0.762	0.13
H		
I	1.27	0.13
J	0.762	0.13

Electrical response

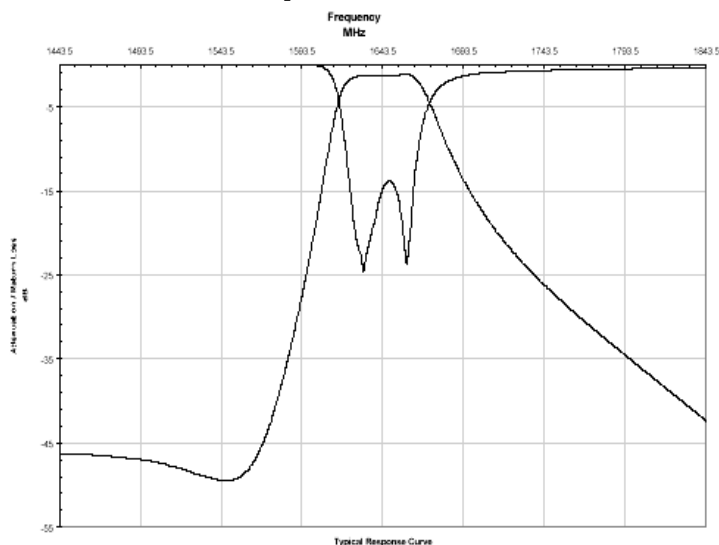

PCB Layout

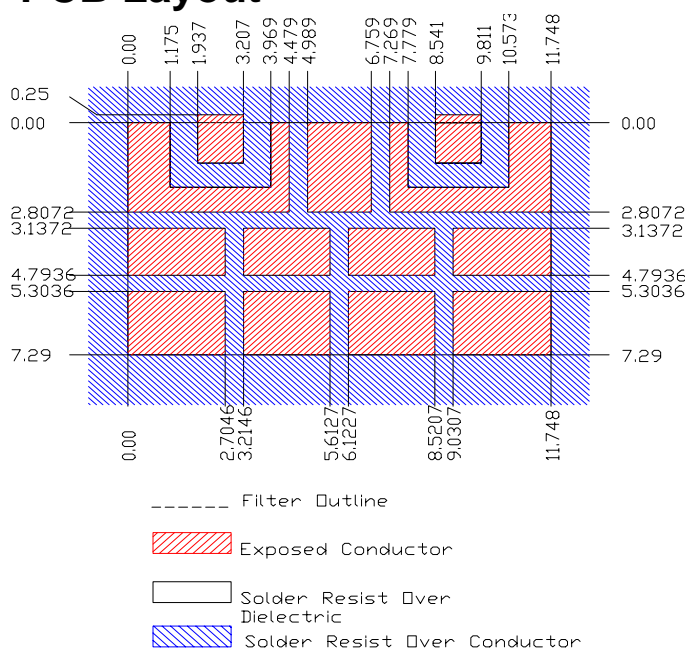

Packaging and Marking

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	1.9
REEL QUANTITY	Per reel	800

