
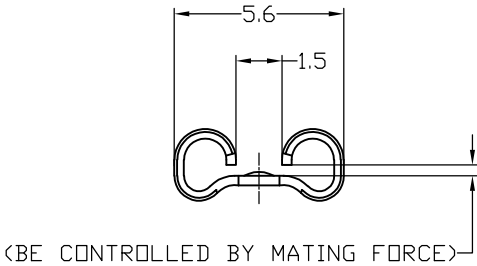


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—	#	L1	REVISED PER ECO—11—005030	11MAR11	RK	HMR

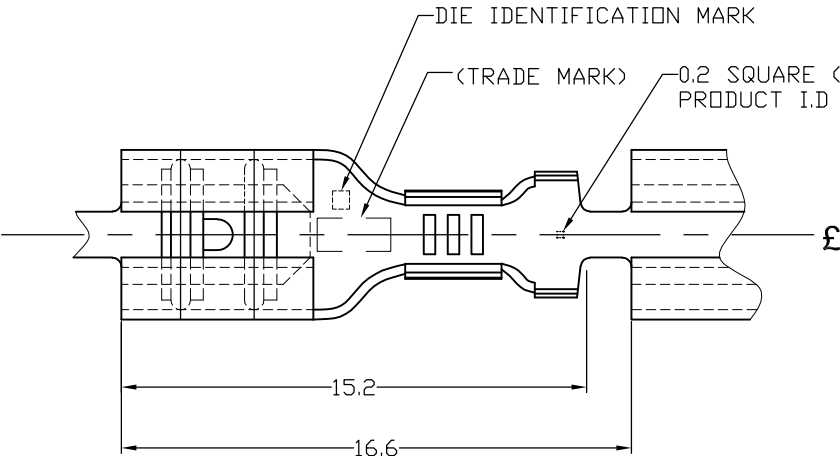


VIEW A-A

NOTE:


1. SEE PRODUCT SPEC FOR THE
DETAIL OF MATING TAB

△2 STRESS RELIEVING
FINISH IS SUBJECT TO CHANGE BY THE TYPE
OF STRESS RELIEVING PROCESS


* INERT GAS FURNACE.....MATTE
* ATMOSPHERIC FURNACE FOLLOWING BY ACID PICKLE...BRIGHT




SECT. "B"—"B"
(-6 ONLY)



SECT. "B"—"B"



SECT. "C"—"C"

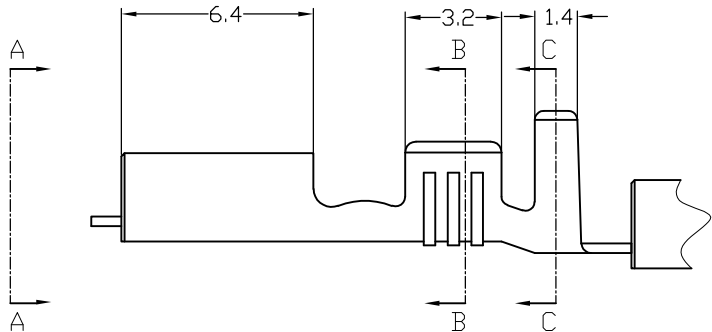

↑	108-5178	—#—	BRASS 0.32t	ELECTRICAL TIN PLATED WITHOUT STRESS RELIEVE	170037-9
	108-5178	—#—	BRASS 0.32t	ELECTRICAL TIN PLATED	170037-6
	108-5178	170038-5	PRE-TIN BRASS		170037-5
	108-5178	170038-4	PHOSBRO 0.32t	ELECTRICAL TIN PLATED	170037-4
	108-5178	170038-3	PHOSBRO 0.32t	—#— △2	170037-3
	108-5178	170038-2	BRASS 0.32t	ELECTRICAL TIN PLATED	170037-2
0.51t	108-5008	170038-1	BRASS 0.32t	—#— △2	170037-1
MATING TAB THK.	PRODUCT SPEC NO.	L.P P/N	MATERIAL	FINISH	P/N

WIRE RANGE

0.5~1.42 mm²
(AWG #20~#16)

INSULATION DIA

2.29~3.3

TOLERANCES

±0.4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位： 耗
mm

MATERIAL
材料

SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± —

1 PLC ± —

2 PLC ± —

3 PLC ± —

4 PLC ± —

ANGLES ± —

FINISH
仕上

SEE TABLE

DWN
LI HELEN

CHK
Mikio Shindo

APVD
Mikio Shindo

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

WEIGHT
0.35g/ea

27AUG2004

30 Aug. 04

30 Aug. 04

108-5008

114-5084

0.35g/ea

TE Connectivity

187 SERIES
FASTON RECEPTACLE

—

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A3

00779

C-170037

—

CUSTOMER DRAWING

SCALE
尺度 4:1

SHEET
1 OF 1

REV
L1

1470-19 (3/11)