
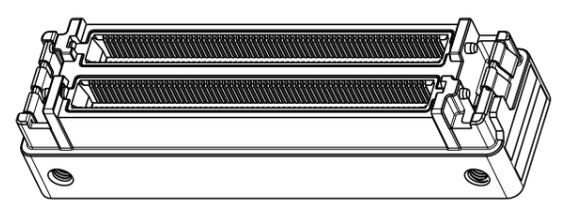
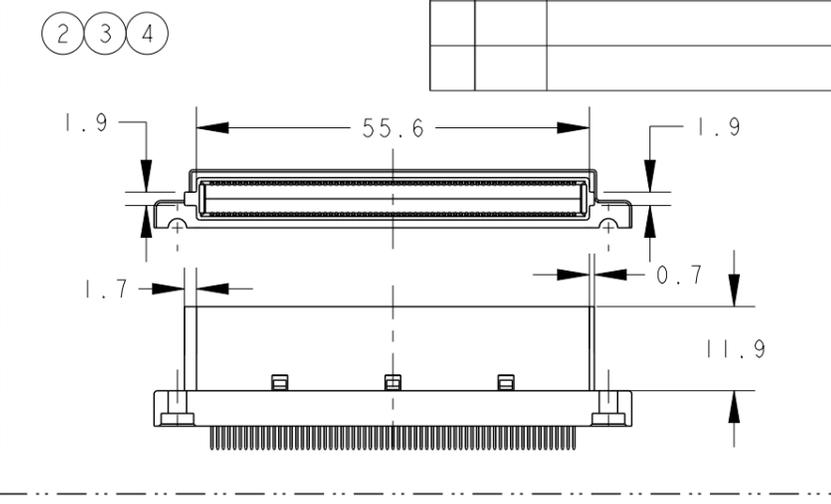


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2008  
 © COPYRIGHT 2008-2012 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B3		REVISED	17JUN2011	T.K	M.K
		C		REVISED	10AUG2012	T.K	M.K



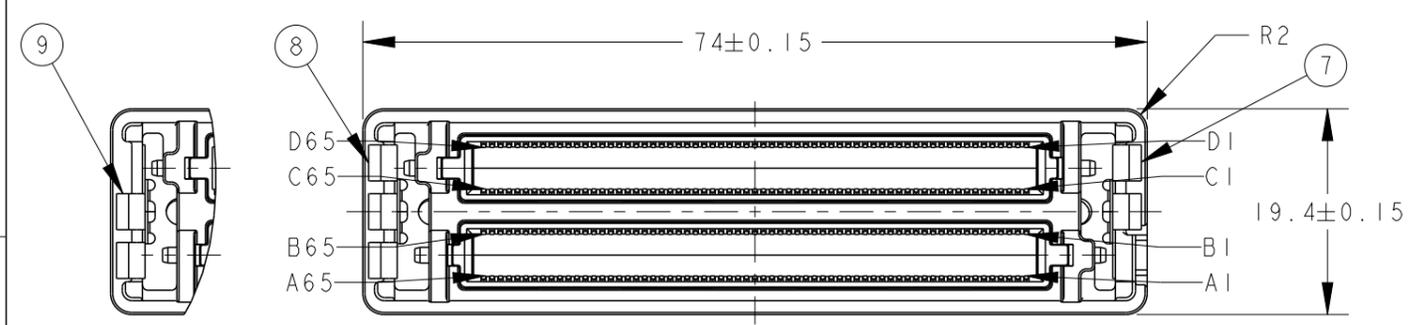


SCALE 1:1


- 1 MATING AREA  
1μmMIN GOLD  
OVER 2.5μmMIN NICKEL  
SOLDERING AREA  
GOLD FLASH  
OVER 2.5μmMIN NICKEL  
OTHERS  
2.5μmMIN NICKEL
- 2 SHIELD FINGER THICKNESS  
0.25mm
- 3 SHIELD FINGER THICKNESS  
0.20mm

4. PIN ASSIGNMENTS AS A REFERENCE

ROHS COMPLIANT

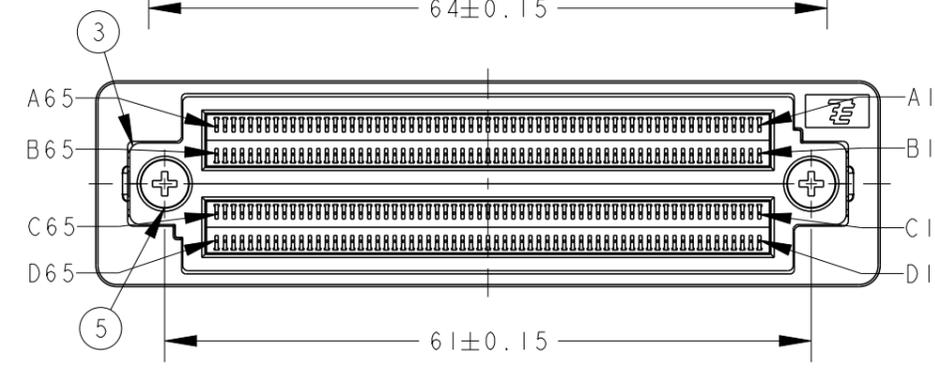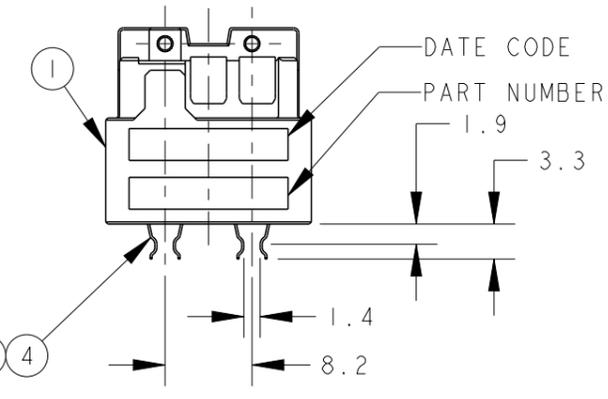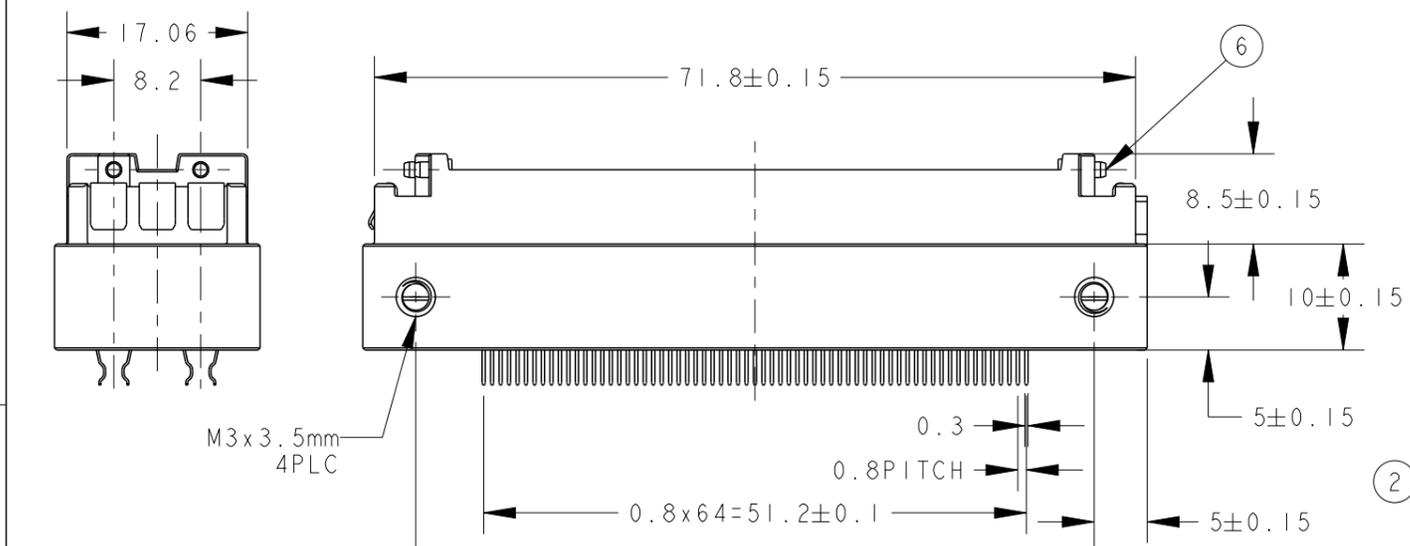

PCB THICKNESS: 1.6~2mm

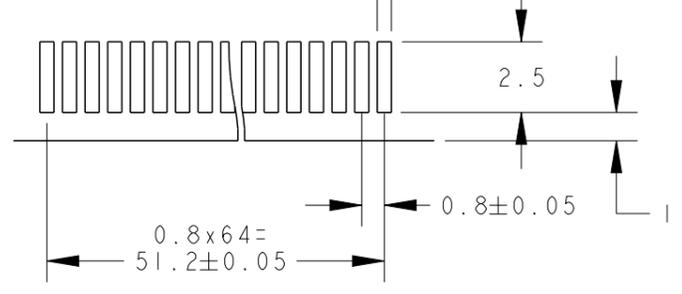

RECOMMENDED BOARD  
SCALE 4:1

QTY	FINISH	MATERIAL	NAME	ITEM NO
2	Ni PLT.	STAINLESS STEEL	3 SHIELD FINGER	9
-	Ni PLT.	STAINLESS STEEL	2 SHIELD FINGER	8
-	Ni PLT.	STAINLESS STEEL	2 SHIELD FINGER	7
4	Ni PLT.	STAINLESS STEEL	PIN FOR HOOK	6
2	ZINC PLATING	STEEL	M2.5 CAP SCREW	5
(260)		COPPER ALLOY	CONTACT	4
2	-	LCP	COVER HOUSING	3
4	-	LCP	INSERT MOLD, CONTACT	2
1	Ni PLT. 2.5~5μm	ZINC DIECAST	BASE HOUSING	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN T.Kanno 5MAR2007  
 CHK M.Kimura 5MAR2007  
 APVD M.Kimura 5MAR2007

PRODUCT SPEC 108-5771  
 APPLICATION SPEC 114-5505

WEIGHT 68.5g

CUSTOMER DRAWING

TE Connectivity

HDR ASSEMBLY  
TC-ZIF CONN  
0.8mm PITCH 260P

SIZE A3 CAGE CODE C-6565199 DRAWING NO. RESTRICTED TO

SCALE 3:2 SHEET 1 OF 1 REV C