




1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

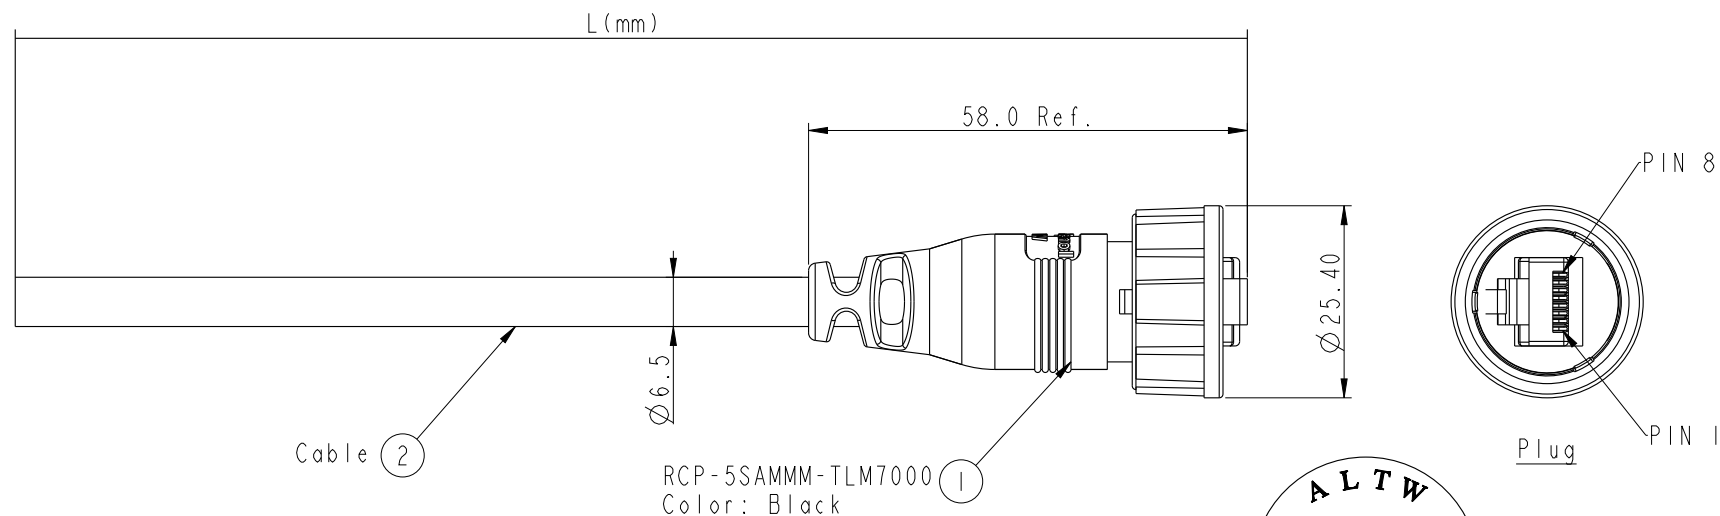

Pin Out

Wire Color		Plug	Twist 對絞
Drain Wire	接地	Shield	
Brown	棕	8	Twist 對絞
Brown/white	棕白	7	
Green	綠	6	Twist 對絞
Blue/white	藍白	5	
Blue	藍	4	Twist 對絞
Green/white	綠白	3	
Orange	橙	2	Twist 對絞
Orange/white	橙白	1	

RCP-5SAMMM-TLM7BXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L):01~99Meters

(B)CAT5E FTP

Note:

- * Important Dimension
- * Waterproof Rate:IP67.
- * Plug:PC,UL94V-2,Gold Plated,Shielded
- * Lock Nut:Nylon+GF,Black.
- * Gasket:EPDM,Black.
- * Cable: (B)CAT5E FTP,OD Max.:Ø6.5,Black.
- * Cable Length Tolerance: 01M: ±40mm
02~05M: ±60mm
06~10M: ±100mm
11~30M: ±200mm
30~99M: ±500mm

UNIT:mm	TITLE		RJ45,C SIZE	
			CABLE 3P_LOCK 5E M CONN M PIN	
	SCALE	1:1	SIZE	A4
	REV.	A	WC-REV.	A.8
TOLERANCE	±0.25		SHEET	1 OF 1
.X	±0.1			
.XX	±0.05			
.XXX	±1°			
ANGLES				

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Laurence_zang	2013-04-20
RCP-5SAMMM-TLM7BXX	CHECKED BY	DATE
CUSTOMER	RAISON	2013-04-20
ALTW	APPROVED BY	DATE
	VICTOR	2013-04-20