


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0527461033
Status: Active
Overview: FFC-FPC (SMT)
Description: 0.40mm Pitch Easy-On™ Type FFC/FPC Connector, Right Angle, Surface Mount, ZIF, Bottom Contact Style, 10 Circuits, High Barrier Packaging

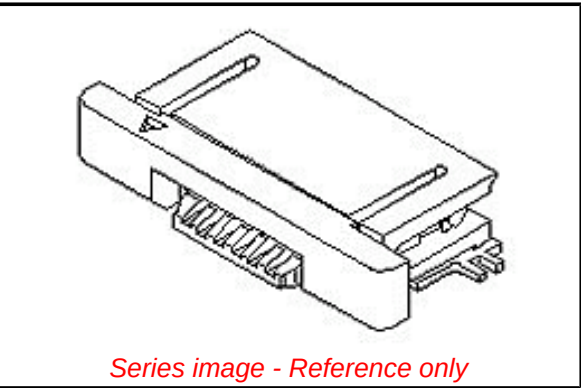

Documents:	
3D Model	Packaging Specification SPK-52746-002 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-52746-017 (PDF)	

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	FFC/FPC Connectors
Series	52746
Overview	FFC-FPC (SMT)
Product Name	Easy-On™
UPC	887191295213
Physical	
Circuits (Loaded)	10
Color - Resin	Natural
Contact Position	Bottom
Durability (mating cycles max)	20
Entry Angle	90° Angle
Flammability	94V-0
Mated Height	2.00mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Silver, Tin-Bismuth
Material - Plating Termination	Silver, Tin-Bismuth
Material - Resin	Nylon
Net Weight	142.200/mg
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.00mm
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FFC/FPC
Electrical	
Current - Maximum per Contact	0.5A
Voltage - Maximum	50V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	SPK-52746-002
Product Specification	PS-52746-017, RPS-52746-066

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per -ED/79/2015 (17 December 2015) Halogen-Free Status Not Low-Halogen Need more information on product environmental compliance? Email productcompliance@molex.com Please visit the Contact Us section for any non-product compliance questions.	China RoHS
China ROHS ELV	Green Image Not Relevant

Search Parts in this Series 52746 Series
Mates With Molex Premo-Flex FFC. Be sure to match like plating

This document was generated on 03/11/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION