

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

MECHANICAL:
PITCH (TERMINAL SPACING): .563"
WIRE RANGE: 10-22 AWG
RECOMMENDED TIGHTENING TORQUE: 14IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

TERMINAL:
TERMINALS: BRASS, TIN PLATED. (UNLESS OTHERWISE STATED)
SCREWS: 8-32 STEEL, NICKEL PLATED. (UNLESS OTHERWISE STATED)
Q.C. TABS: BRASS, NICKEL PLATED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T5	PART STATUS UPDATED	22JAN2018	RK	PS

STAINLESS STEEL SCREWS.

WHITE INK STAMP.

NICKEL PLATED BRASS TERMINALS.

NICKEL PLATED BRASS SCREWS.

SEE FIGURE.

PRELIMINARY PART NUMBER.

OBSOLETE PART NUMBER.

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

6/5	-	-	-	-	-	-	-	-	-	-	7.886	8.323	13	1-1546310-3
2/7	-	-	-	-	-	-	-	12	12	12	7.323	7.760	12	4-1546310-8
7	-	8	-	-	-	12	12	12	-	-	7.323	7.760	12	4-1546310-7
7	-	-	-	-	12	12	12	-	-	-	7.323	7.760	12	4-1546310-6
	-	-	-	-	-	-	-	-	-	-	7.323	7.760	12	1-1546310-2
	-	-	-	-	-	-	-	-	-	-	6.760	7.179	11	1-1546310-1
	-	-	-	-	-	-	-	-	-	-	6.197	6.634	10	1-1546310-0
	-	-	-	-	-	-	-	-	-	-	5.634	6.071	9	1546310-9
4/7	-	-	-	-	-	-	-	-	-	8	5.071	5.508	8	4-1546310-5
	-	8	8	-	-	-	-	-	-	-	5.071	5.508	8	2-1546310-9
	-	-	-	-	-	-	-	-	-	-	5.071	5.508	8	1546310-8
7	-	-	-	-	-	7	-	-	-	-	4.508	4.945	7	3-1546310-8
	-	-	-	-	-	-	-	-	-	-	4.508	4.945	7	1546310-7
4/7	-	-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-4
4/7	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	4-1546310-3
7	-	-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-2
5/3/2/1/7	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	3-1546310-1
	-	-	-	-	-	6	-	-	-	-	3.945	4.382	6	3-1546310-0
	-	6	6	-	-	-	-	-	-	-	3.945	4.382	6	2-1546310-8
5/4/3/7	-	1	1	-	-	5	1	-	-	-	3.945	4.382	6	2-1546310-6
1/7	-	-	-	-	-	-	-	6	-	-	3.945	4.382	6	2-1546310-3
1/7	-	-	-	-	6	-	-	-	-	-	3.945	4.382	6	2-1546310-2
7	-	-	-	-	-	-	-	-	6	6	3.945	4.382	6	2-1546310-1
5/2/7	-	-	-	-	-	-	-	-	6	6	3.945	4.382	6	1546636-1
6/1	-	-	-	6	-	-	-	-	6	-	3.945	4.382	6	1-1546310-9
1	-	-	-	6	-	-	-	-	-	-	3.945	4.382	6	1546589-1
	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	1546310-6
	-	-	-	-	-	5	-	-	-	-	3.382	3.819	5	3-1546310-7
5/4/3/7	-	1	1	-	-	-	1	-	-	5	3.382	3.819	5	2-1546310-7
	-	-	-	-	-	-	-	-	-	-	3.382	3.819	5	1546310-5
2/6	-	-	-	-	-	-	-	4	4	4	2.819	3.256	4	5-1546310-0
5/4/3/2/7	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	4-1546310-1
7/4	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	4-1546310-0
5/3/2/1/7	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	3-1546310-9
	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	1546310-4
4/3/7	-	-	-	-	-	-	-	-	-	-	2.256	2.693	3	2-1546310-5
5/1/7	-	-	-	-	-	-	-	3	1	-	2.256	2.693	3	2-1546310-4
6/5/1	-	-	-	1	2	-	-	1	-	-	2.256	2.693	3	2-1546310-0
	-	-	-	-	-	-	-	-	-	-	2.256	2.693	3	1546310-3
	-	-	-	-	-	-	2	-	2	-	1.693	2.130	2	5-1546310-1
	-	-	-	-	-	-	-	-	-	-	1.693	2.130	2	1546310-2
NOTES	9	8	7	6	5	4	3	2	1		DIM B	DIM A	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

-

FINISH

-

DWN 16FEB2007
CHK 2/16/07
APVD 2/16/07
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

S SCHLEGEL
S YODER
S YODER







14.3 (.563) DBL ROW BARRIER STRIP
W/O WASHER

SIZE A2
CAGE CODE 00779
DRAWING NO C-1546310
RESTRICTED TO -

TE Connectivity Ltd.

SCALE NTS
SHEET 1 OF 4
REV T5

1471-9 (1/15)

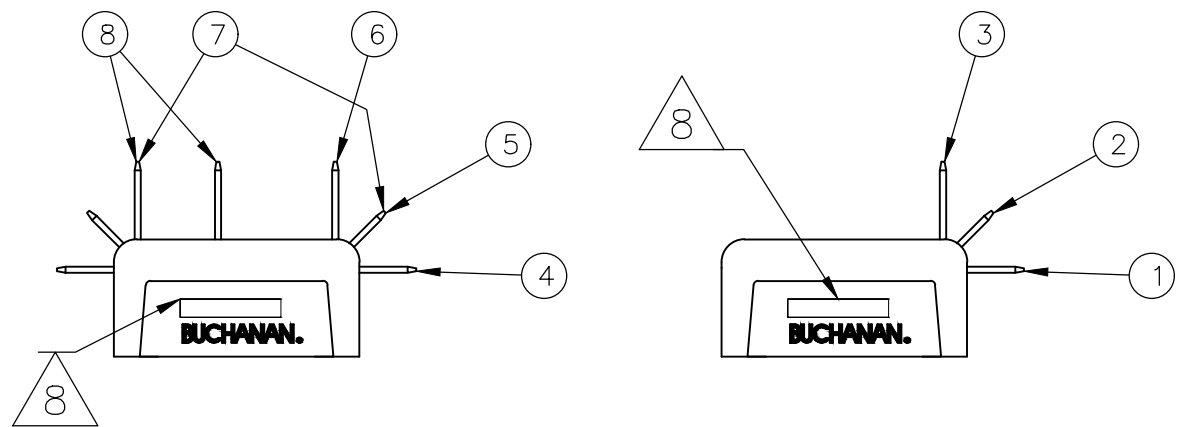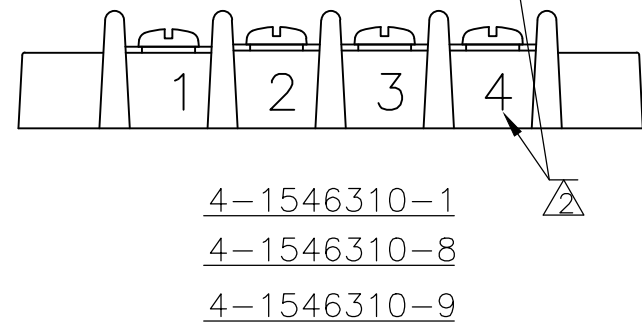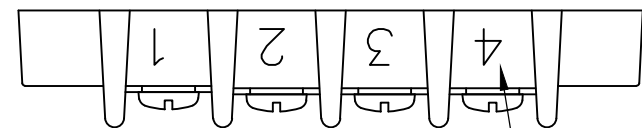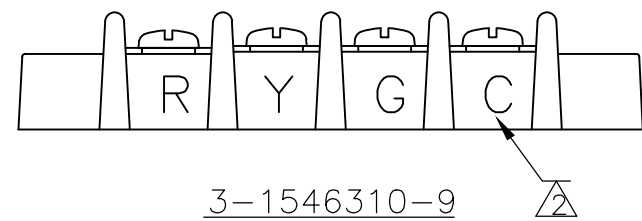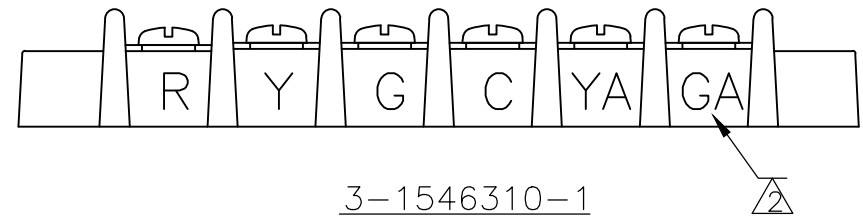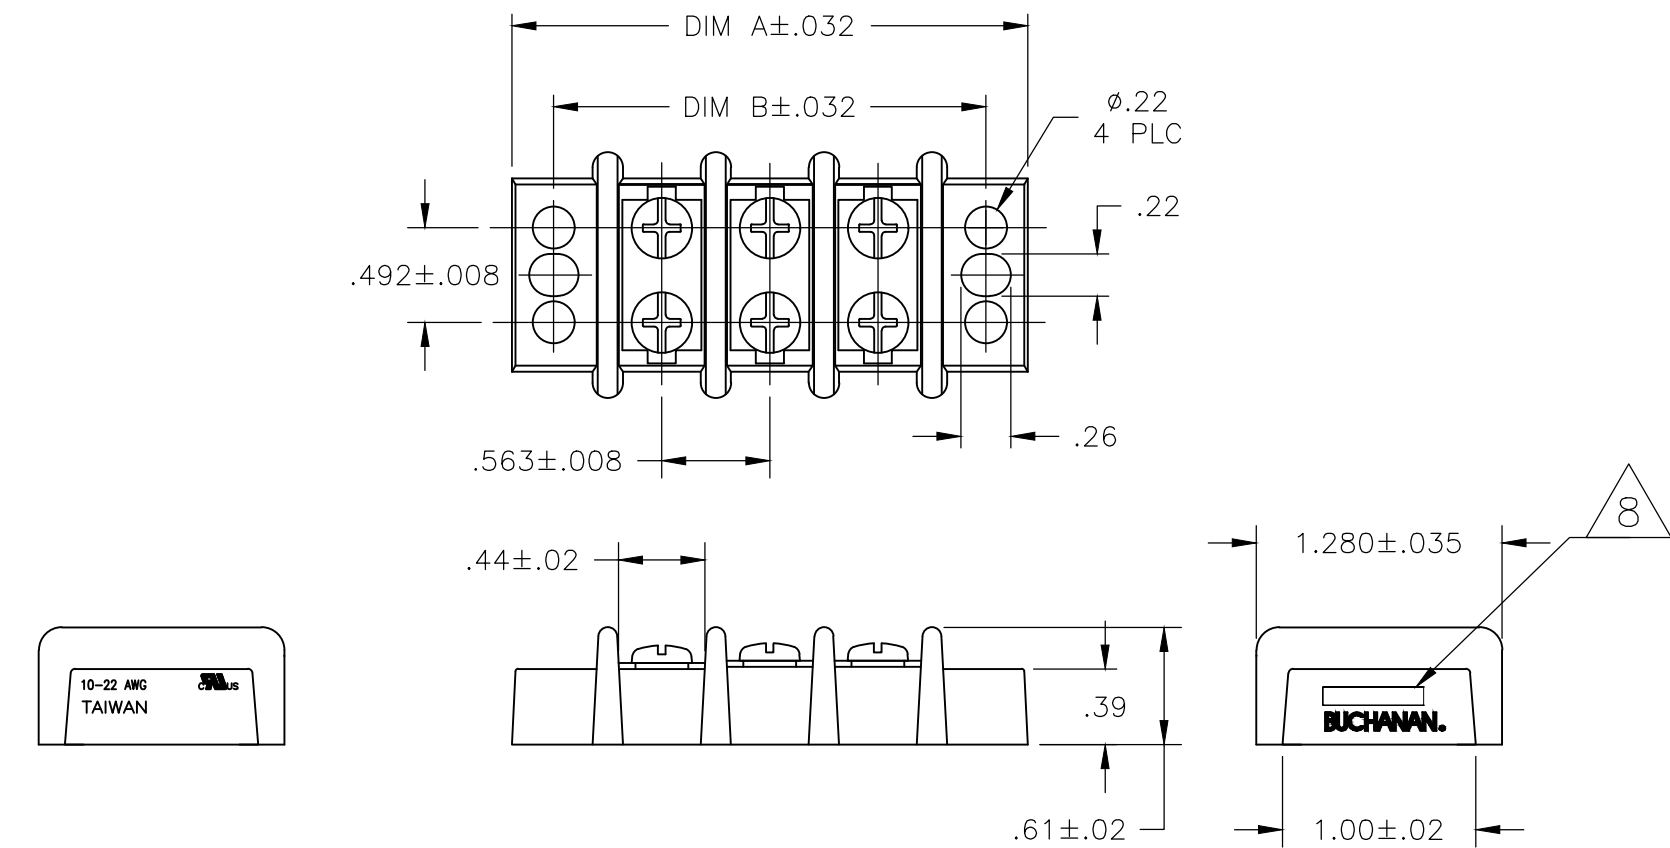

	-	-	-	-	-	-	2	-	2	-	1.693	2.130		5-1546310-1
	-	-	-	-	-	-	-	-	-	-	10.701	11.138	18	1-1546310-8
	-	-	-	-	-	-	-	-	-	-	10.138	10.575	17	1-1546310-7
	-	-	-	-	-	-	-	-	-	-	9.575	10.012	16	1-1546310-6
	-	-	-	-	-	-	-	-	-	-	9.012	9.449	15	1-1546310-5
	-	-	-	-	-	-	-	-	14	14	8.449	8.886	14	4-1546310-9
	-	-	-	-	-	-	-	-	-	-	8.449	8.886	14	1-1546310-4
NOTES	9	8	7	6	5	4	3	2	1		DIM B	DIM A	NO. OF POSN	PART NUMBER
	OTB JUMPER	.250 QC TAB 90° DOUBLE SIDE	.250 QC TAB 90°/45° DOUBLE SIDE	.250 QC TAB 90° DOUBLE SIDE	.250 QC TAB 45° DOUBLE SIDE	.250 QC TAB STRAIGHT DOUBLE SIDE	.250 QC TAB 90° SINGLE SIDE	.250 QC TAB 45° SINGLE SIDE	.250 QC TAB STRAIGHT SINGLE SIDE					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH

DWN 16FEB2007

CHK 2/16/07

APVD 2/16/07

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity Ltd.

14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER

SIZE A2

CAGE CODE 00779

DRAWING NO C-1546310

RESTRICTED TO


SCALE NTS

SHEET 2 OF 4


REV T5

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D

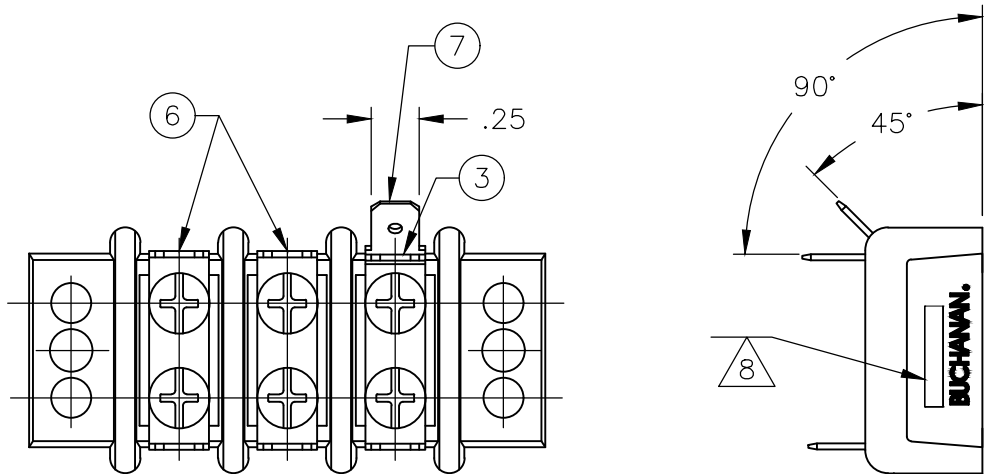


2-1546310-0

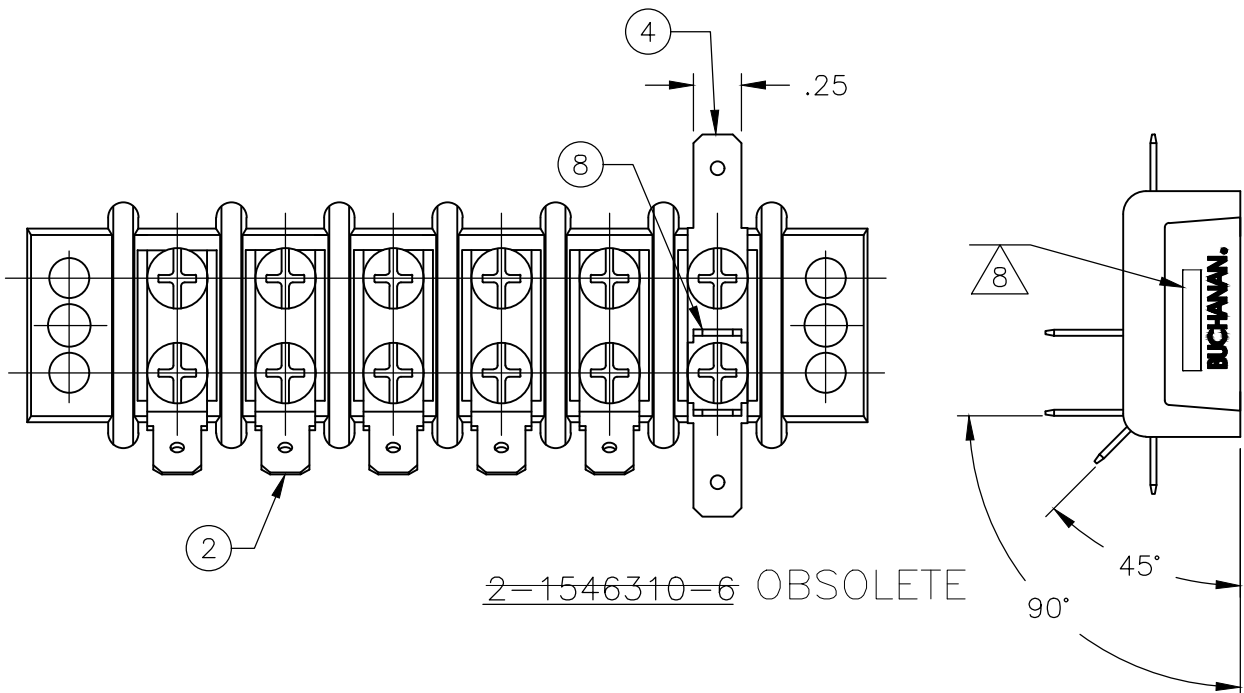


2-1546310-6 OBSOLETE


C

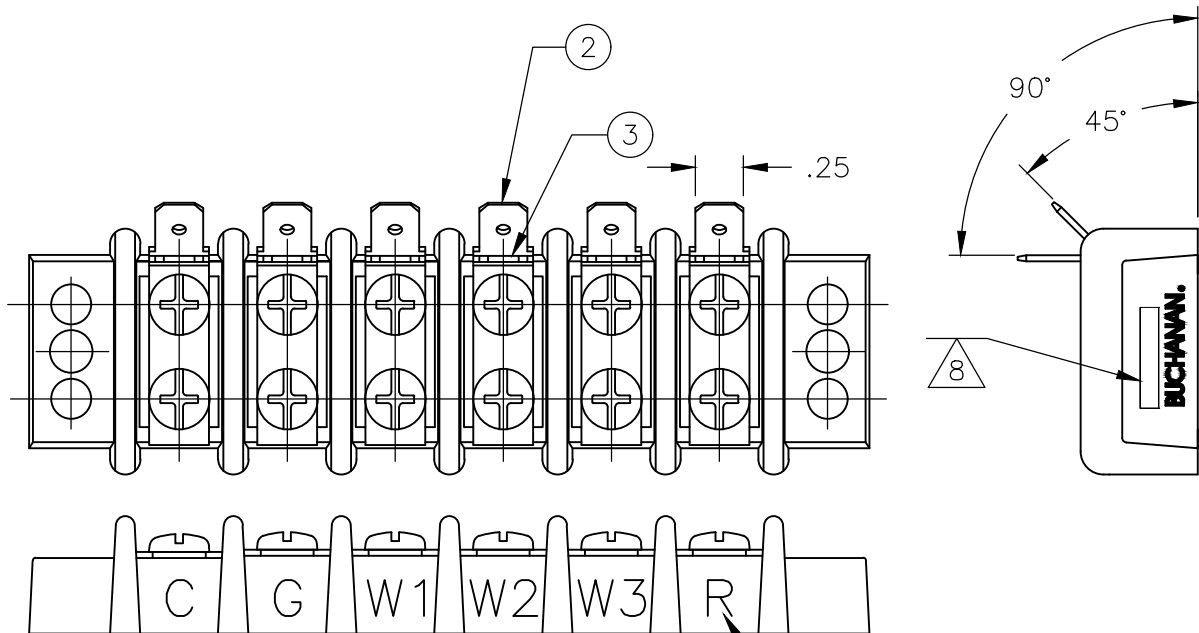

OBSOLETE 2-1546310-1

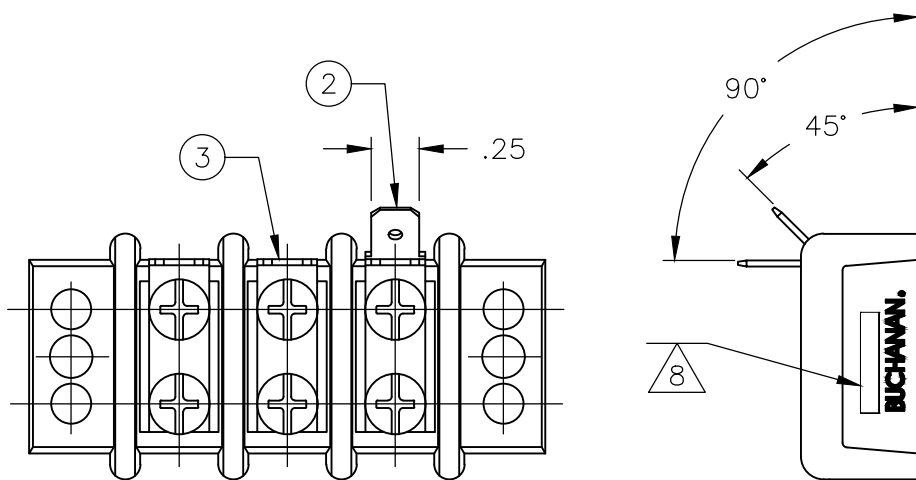


2-1546310-4 OBSOLETE

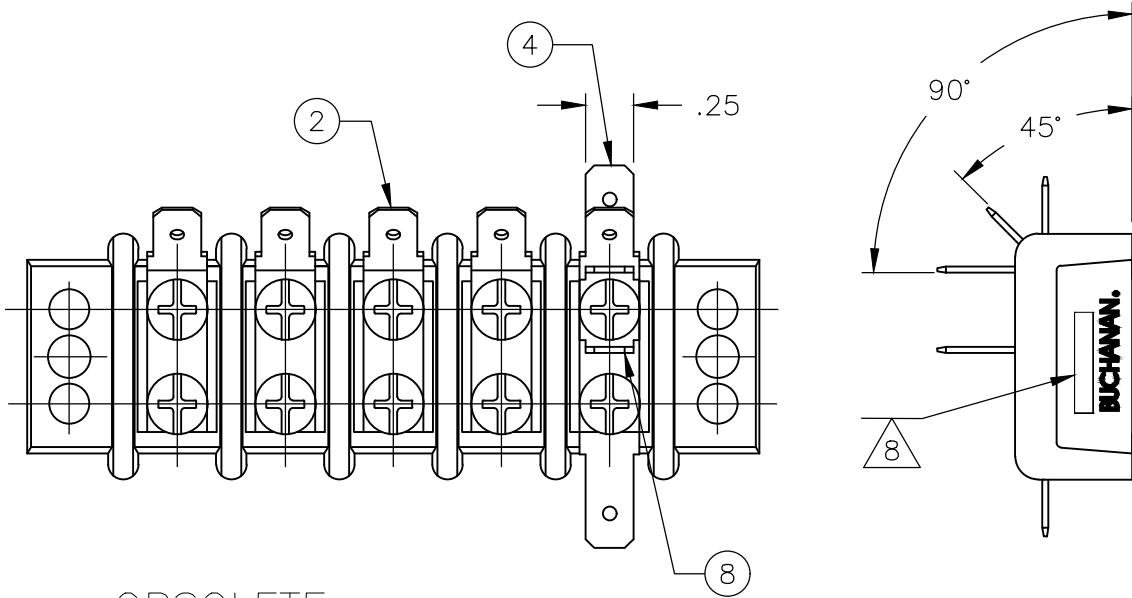

OBSOLETE 2-1546310-7

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 16FEB2007	 TE Connectivity Ltd.		
DIMENSIONS: INCHES		CHK S YODER 2/16/07			
	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD S YODER 2/16/07	NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC APPLICATION SPEC			
MATERIAL	FINISH	WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C-1546310
CUSTOMER DRAWING		SCALE NTS	SHEET 3 OF 4		REV T5

D


C

1546310


B

A


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

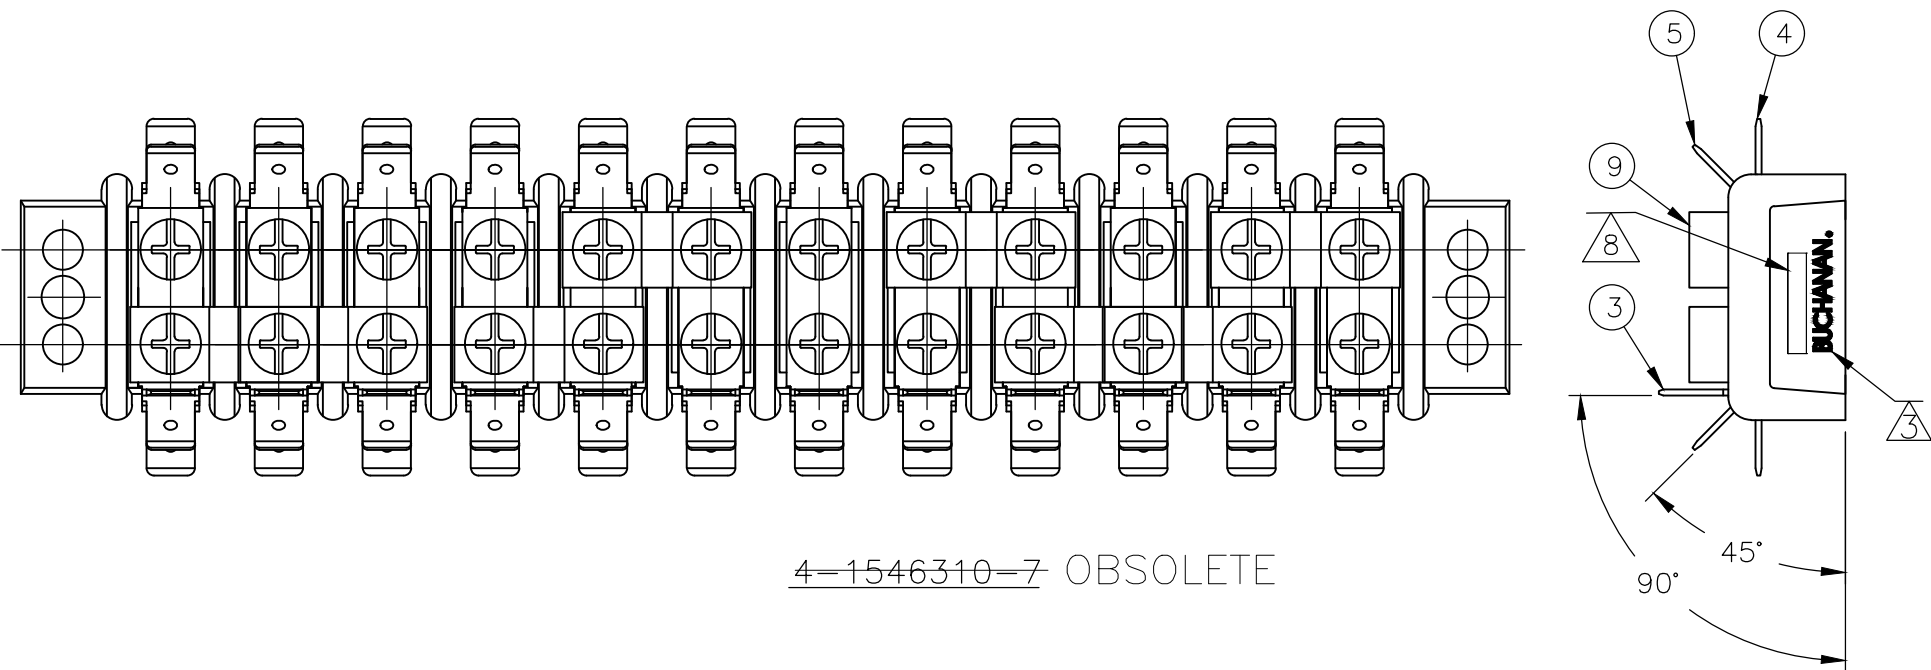

4-1546310-7 OBSOLETE

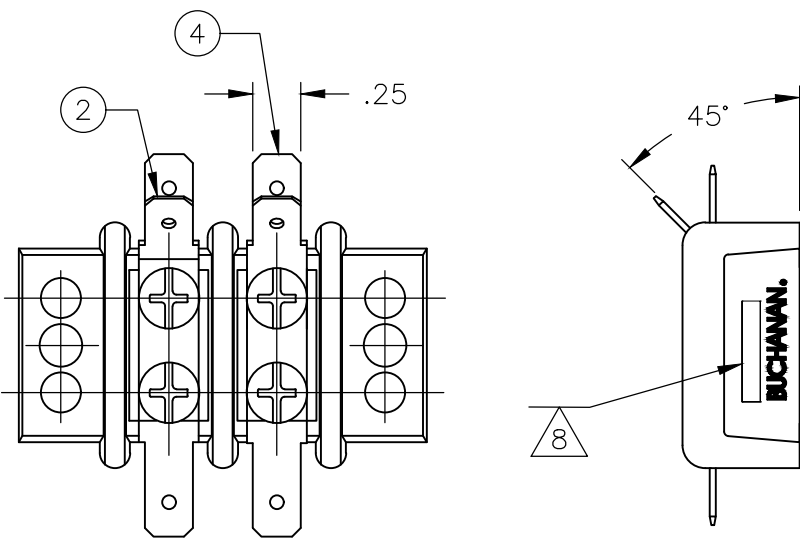

5-1546310-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL CHK S YODER APVD S YODER		 TE Connectivity Ltd.	
		2/16/07 2/16/07			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER —	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -			
MATERIAL —		FINISH —		RESTRICTED TO —	
		WEIGHT —		SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO C-1546310	
				SCALE NTS	SHEET 4 OF 4
				REV T5	