


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		INITIAL RELEASE	25MAY2015	TB	AVZ

- NOTES:
- EACH ITEM AND ASSEMBLY MUST COMPLY WITH EUROPEAN REDUCTION OF HAZARDOUS SUBSTANCES (RoHS) REGULATION. UNDER DIRECTIVE 2011/65/EU.
  - DO NOT SOLDER CONTACT, CRIMP ONLY
  - IDENTIFY POSITION PE, LOADING POSITIONER PE TO SOCKET PE
  - PE CONTACT CIRCUIT IDENTIFIED BY EXTENDED LENGTH POLARIZED "KEY"
  - ELECTRICAL TEST:  
100% OPEN SHORT&MISS WIRE TEST  
CONTACT RESISTANCE: 2 OHM MAX

TE PN  
2829493-1

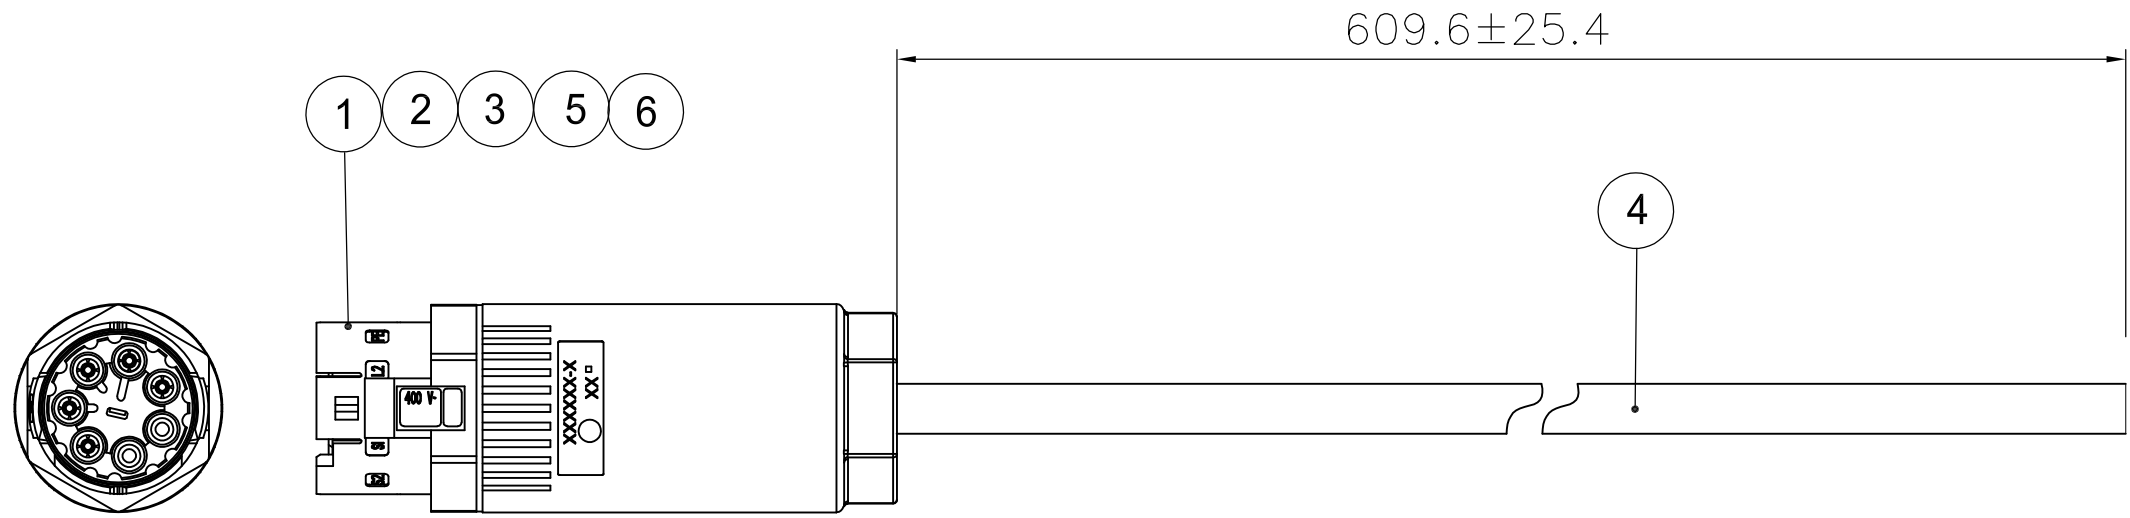

CONNECTOR1

WIRE DIAGRAM

CONNECTOR 1	WIRE COLOR
L1	BLACK
N	WHITE
L3	
S2	RED
S1	ORANGE
L2	
PE	GREEN

5	PC	14 AWG Socket Contacts	6
1	PC	Socket Housing Assembly 5 POS. A CODING	5
AR	M	14/5 Cable standard UL (SOUTHWIRE: SE00W 14/5C BLACK)	6
1	PC	Cable Ring Nut 11-14mm OD	3
1	PC	Cable Clamp/Seal Assembly 11-14mm OD	2
1	PC	Contact/Positioner Assembly	1
-1	UoM	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.BURZYŃSKI 25MAY2015	TE Connectivity	
DIMENSIONS: mm		CHK A.V.ZANDVOORT 25MAY2015		
		APVD A.V.ZANDVOORT 25MAY2015	NAME SEALED 567 POS SOCKET - STD UL	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	-	
0 PLC ± 0,5		APPLICATION SPEC	-	
1 PLC ± 0,5		WEIGHT	-	
2 PLC ± 0,5		SIZE	A3	CAGE CODE
3 PLC ± -		DRAWING NO	00779 C-2829493	
4 PLC ± -		RESTRICTED TO	-	
ANGLES ± 2		SCALE	NTS	
MATERIAL		SHEET	1 OF 1	
FINISH		REV	A	
-		CUSTOMER DRAWING		