

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.


ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		A1	REVISED PER ECO-09-024209	27JAN10	HMR	CR


MATERIAL:
HOUSING: POLYAMIDE 6/6, UL94V-0.
COLOR: BROWN.
TUBULAR CONTACT: TIN PLATED, BRASS.
SCREW: M3.5 STEEL, ZINC PLATED W/ NON-
HEXAVALENT CHROMATE (CHROME III).
WIRE PROTECTOR: STAINLESS STEEL.

CURRENT RATING: 40A.
OPERATING VOLTAGE: 250V.
WIRE RANGE: 10-24 AWG.

CONTINUOUS WORKING TEMP.: -50°C TO +160°C.

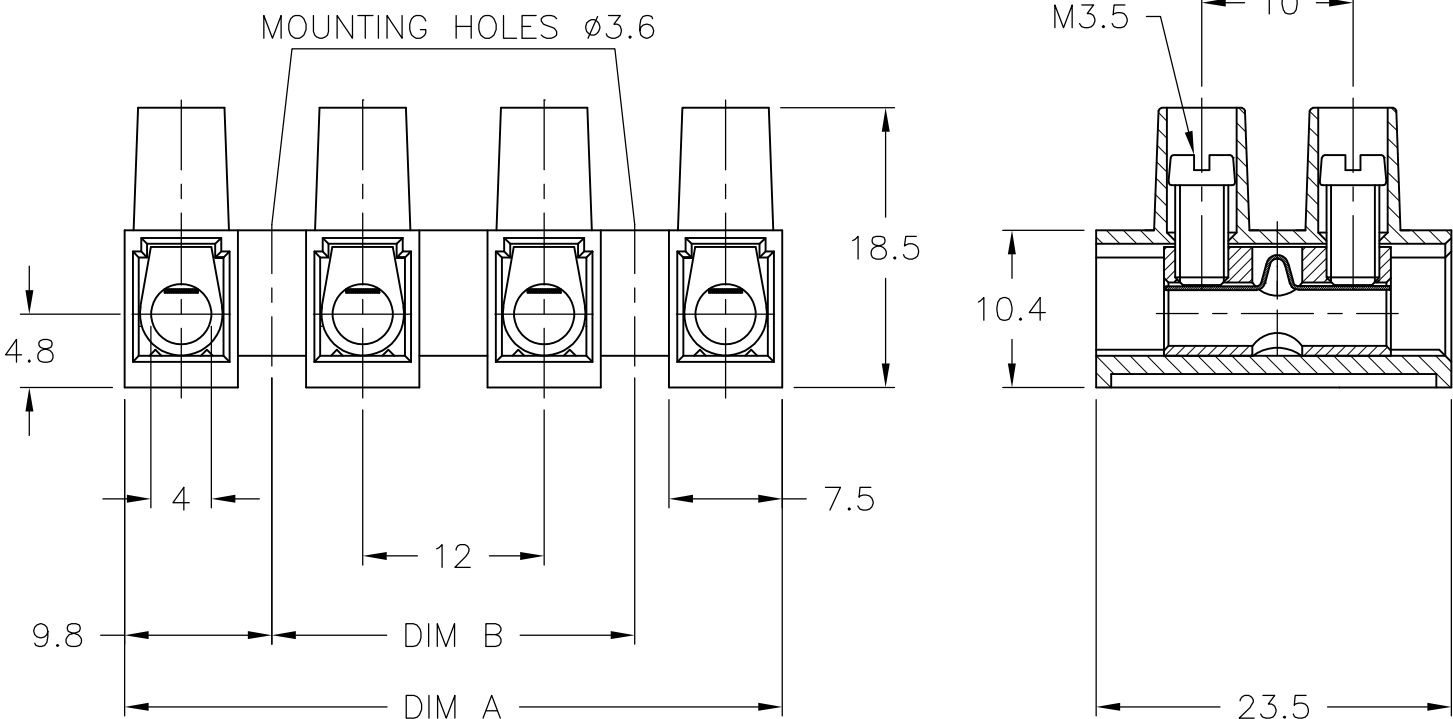

120	139.5	12	TSB100012DSHT	1-1776304-2
108	127.5	11	TSB100011DSHT	1-1776304-1
96	115.5	10	TSB100010DSHT	1-1776304-0
84	103.5	9	TSB100009DSHT	1776304-9
72	91.5	8	TSB100008DSHT	1776304-8
60	79.5	7	TSB100007DSHT	1776304-7
48	67.5	6	TSB100006DSHT	1776304-6
36	55.5	5	TSB100005DSHT	1776304-5
24	43.5	4	TSB100004DSHT	1776304-4
12	31.5	3	TSB100003DSHT	1776304-3
-	19.5	2	TSB100002DSHT	1776304-2
-	7.5	1	TSB100001DSHT	1776304-1
DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 3/21/05	 Tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
		CHK C RICHARD 3/21/05				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.7 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2'	APVD C RICHARD 3/21/05	NAME 12mm PITCH, EUROPA TERMINAL BLOCK HIGH TEMP.			
		PRODUCT SPEC —				
MATERIAL —		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO —
		WEIGHT —	A3	00779	C-1776304	
		CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1	