

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0783471011](#)

**Status:** **Active**

**Overview:** [Impact™ Backplane Connector and Cable Assembly System](#)

**Description:** Impact™ 3 Pair, Right Angle Power Header, Left Hold-Down, Press-Fit, Module 1: P1 & P2, Blade Length 6.90mm; Module 2: P1 & P2 Blade Length 6.90mm, LCP, Glass Filled UL94-V0, Black, Tray Packaging, Lead-Free

**Documents:**

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-78213-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**


UL E29179

**General**

Product Family	Backplane Connectors
Series	<a href="#">78347</a>
Application	Conventional, Coplanar
Application Tooling Documents	TM-622018799
Component Type	Power Header
Overview	<a href="#">Impact™ Backplane Connector and Cable Assembly System</a>
Product Name	Impact™
UPC	884982472037

**Physical**

Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	12.645/g
Number of Columns	N/A
Number of Pairs	3
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	5.20mm
Pitch - Termination Interface	2.00mm, 3.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

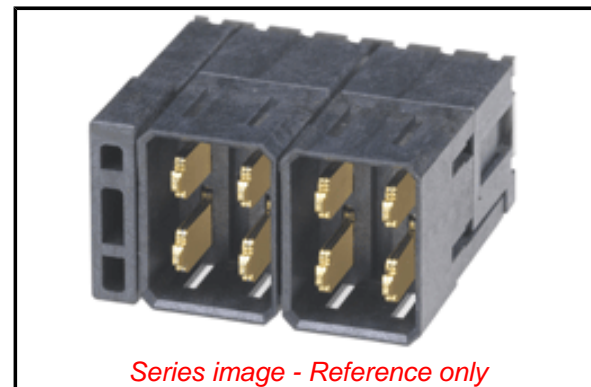

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Contains SVHC(2014 December 17): No

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

**China RoHS**

Green Image

Not Relevant

**Search Parts in this Series**

[78347](#) Series

**Mates With**

[78212](#) Impact™ Vertical Receptacle, [78348](#) Right Angle Receptacle

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Right Angle Power Module Installation, Press-In Tool	<a href="#">0622018649</a>
Impact™ Power Module Right Angle Removal Tool	<a href="#">0622024500</a>

**Electrical**

Current - Maximum per Contact	15.0A
Data Rate	N/A
Shield Type	N/A
Shielded	No
Voltage - Maximum	250V

**Solder Process Data**

Lead-freeProcess Capability	N/A
-----------------------------	-----

**Material Info****Reference - Drawing Numbers**

Product Specification	PS-78213-001
Sales Drawing	SD-78347-001
Symbol/Footprint Data	SYM-78347-1011

This document was generated on 06/30/2015

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**