
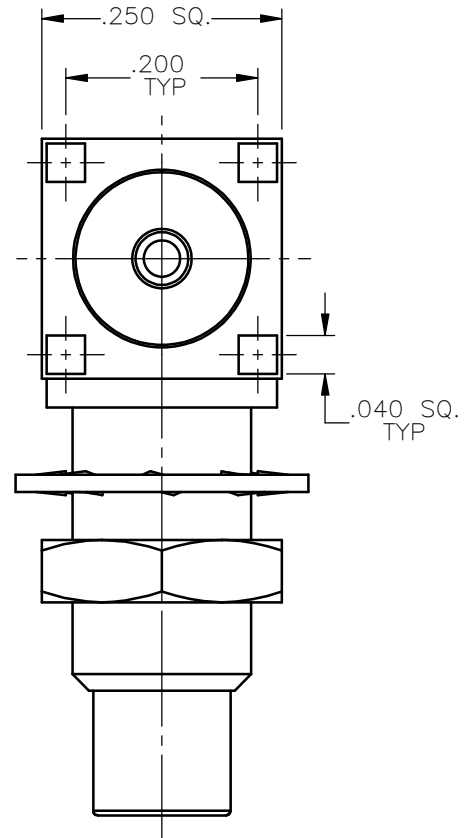
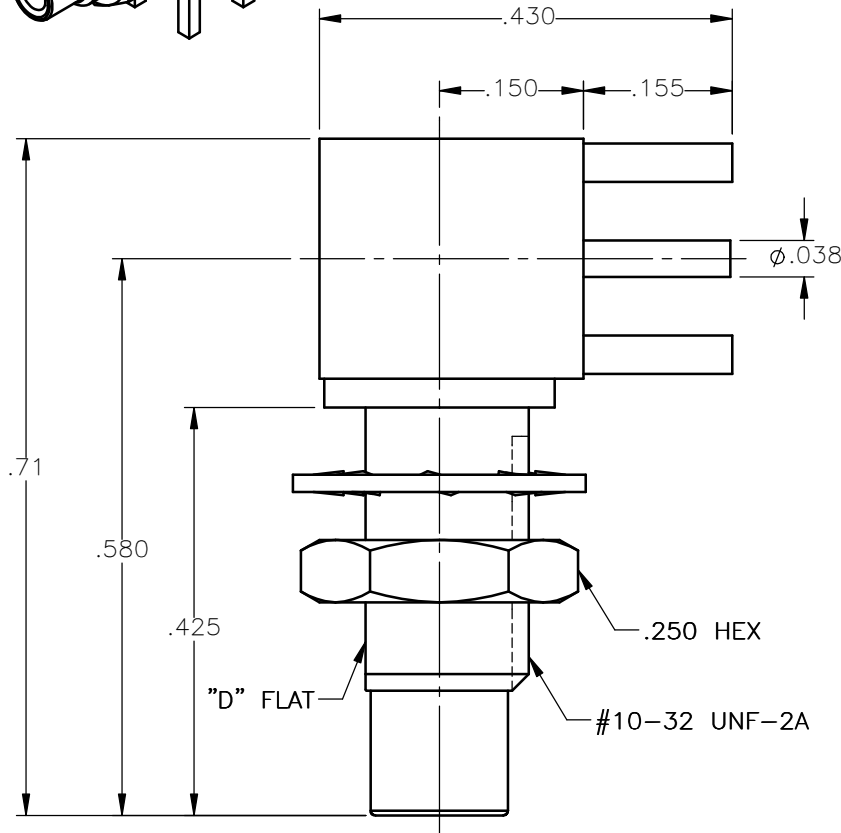




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/26/11	D.N.

NOTES:

MATERIALS:

1. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: DATE		Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL. 			
		D.N. 05/26/11					
DECIMAL	ANGLE	CHKD: DATE		SMC RIGHT ANGLE MALE JACK BULKHEAD MOUNT P.C.B. RECEPTACLE			
		M.J. 05/26/11					
		APVD: DATE					
		J.M. 05/26/11					
REFERENCE: ORIGINATED: D.N. DATE: 05/26/11		MATERIALS & FINISHES: SEE NOTES		SIZE	FSCM NO.	DWG NO.	REV
				A	19505	1110-1511-000	A
				SCALE 5:1		THIRD ANGLE PROJECTION  	SHEET 1 OF 1

1110-1511-000