
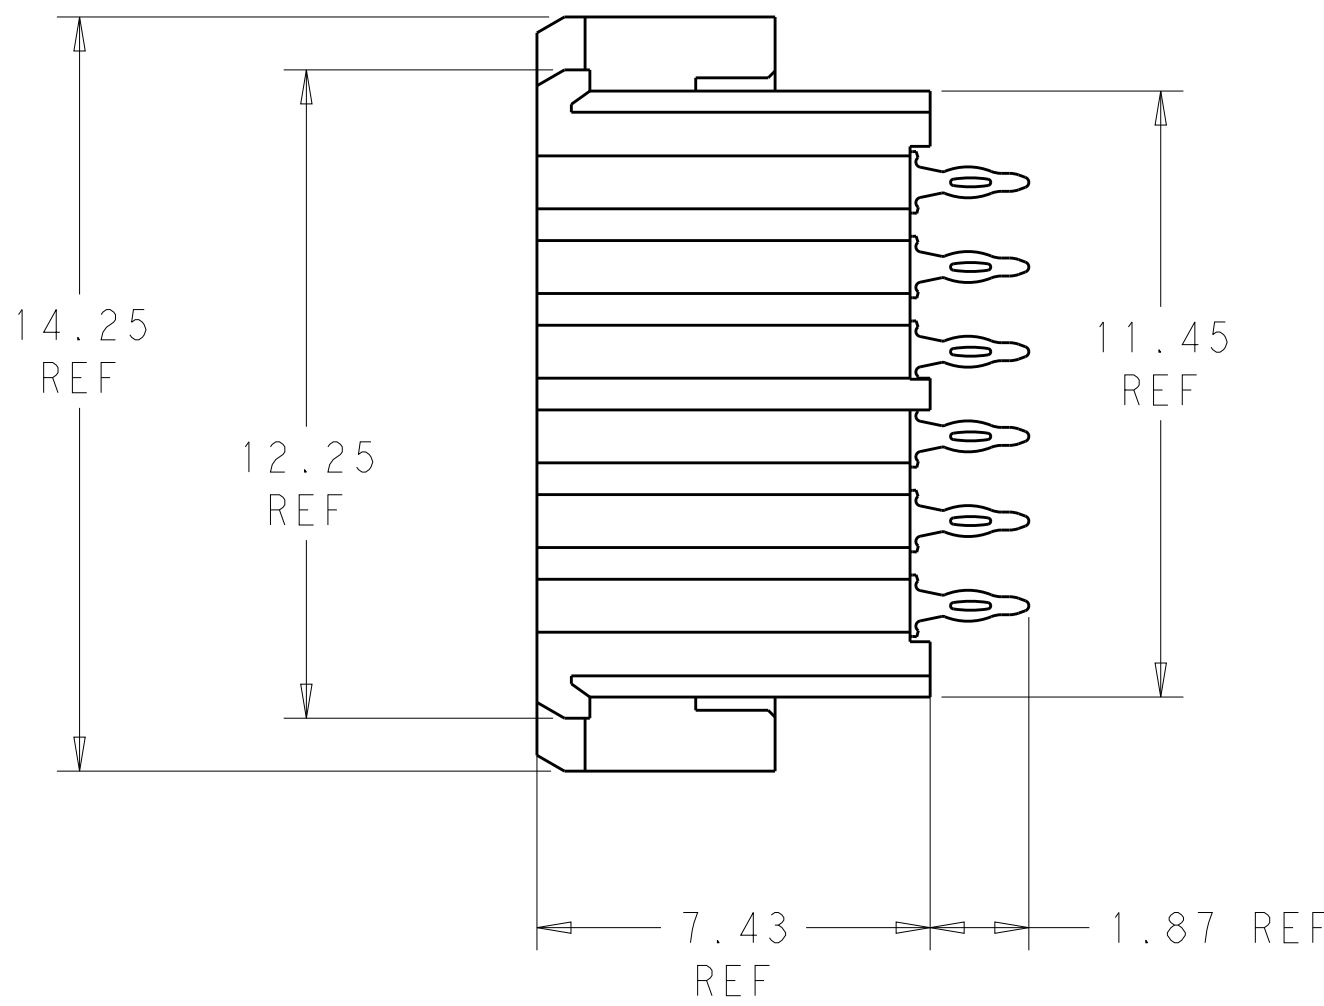
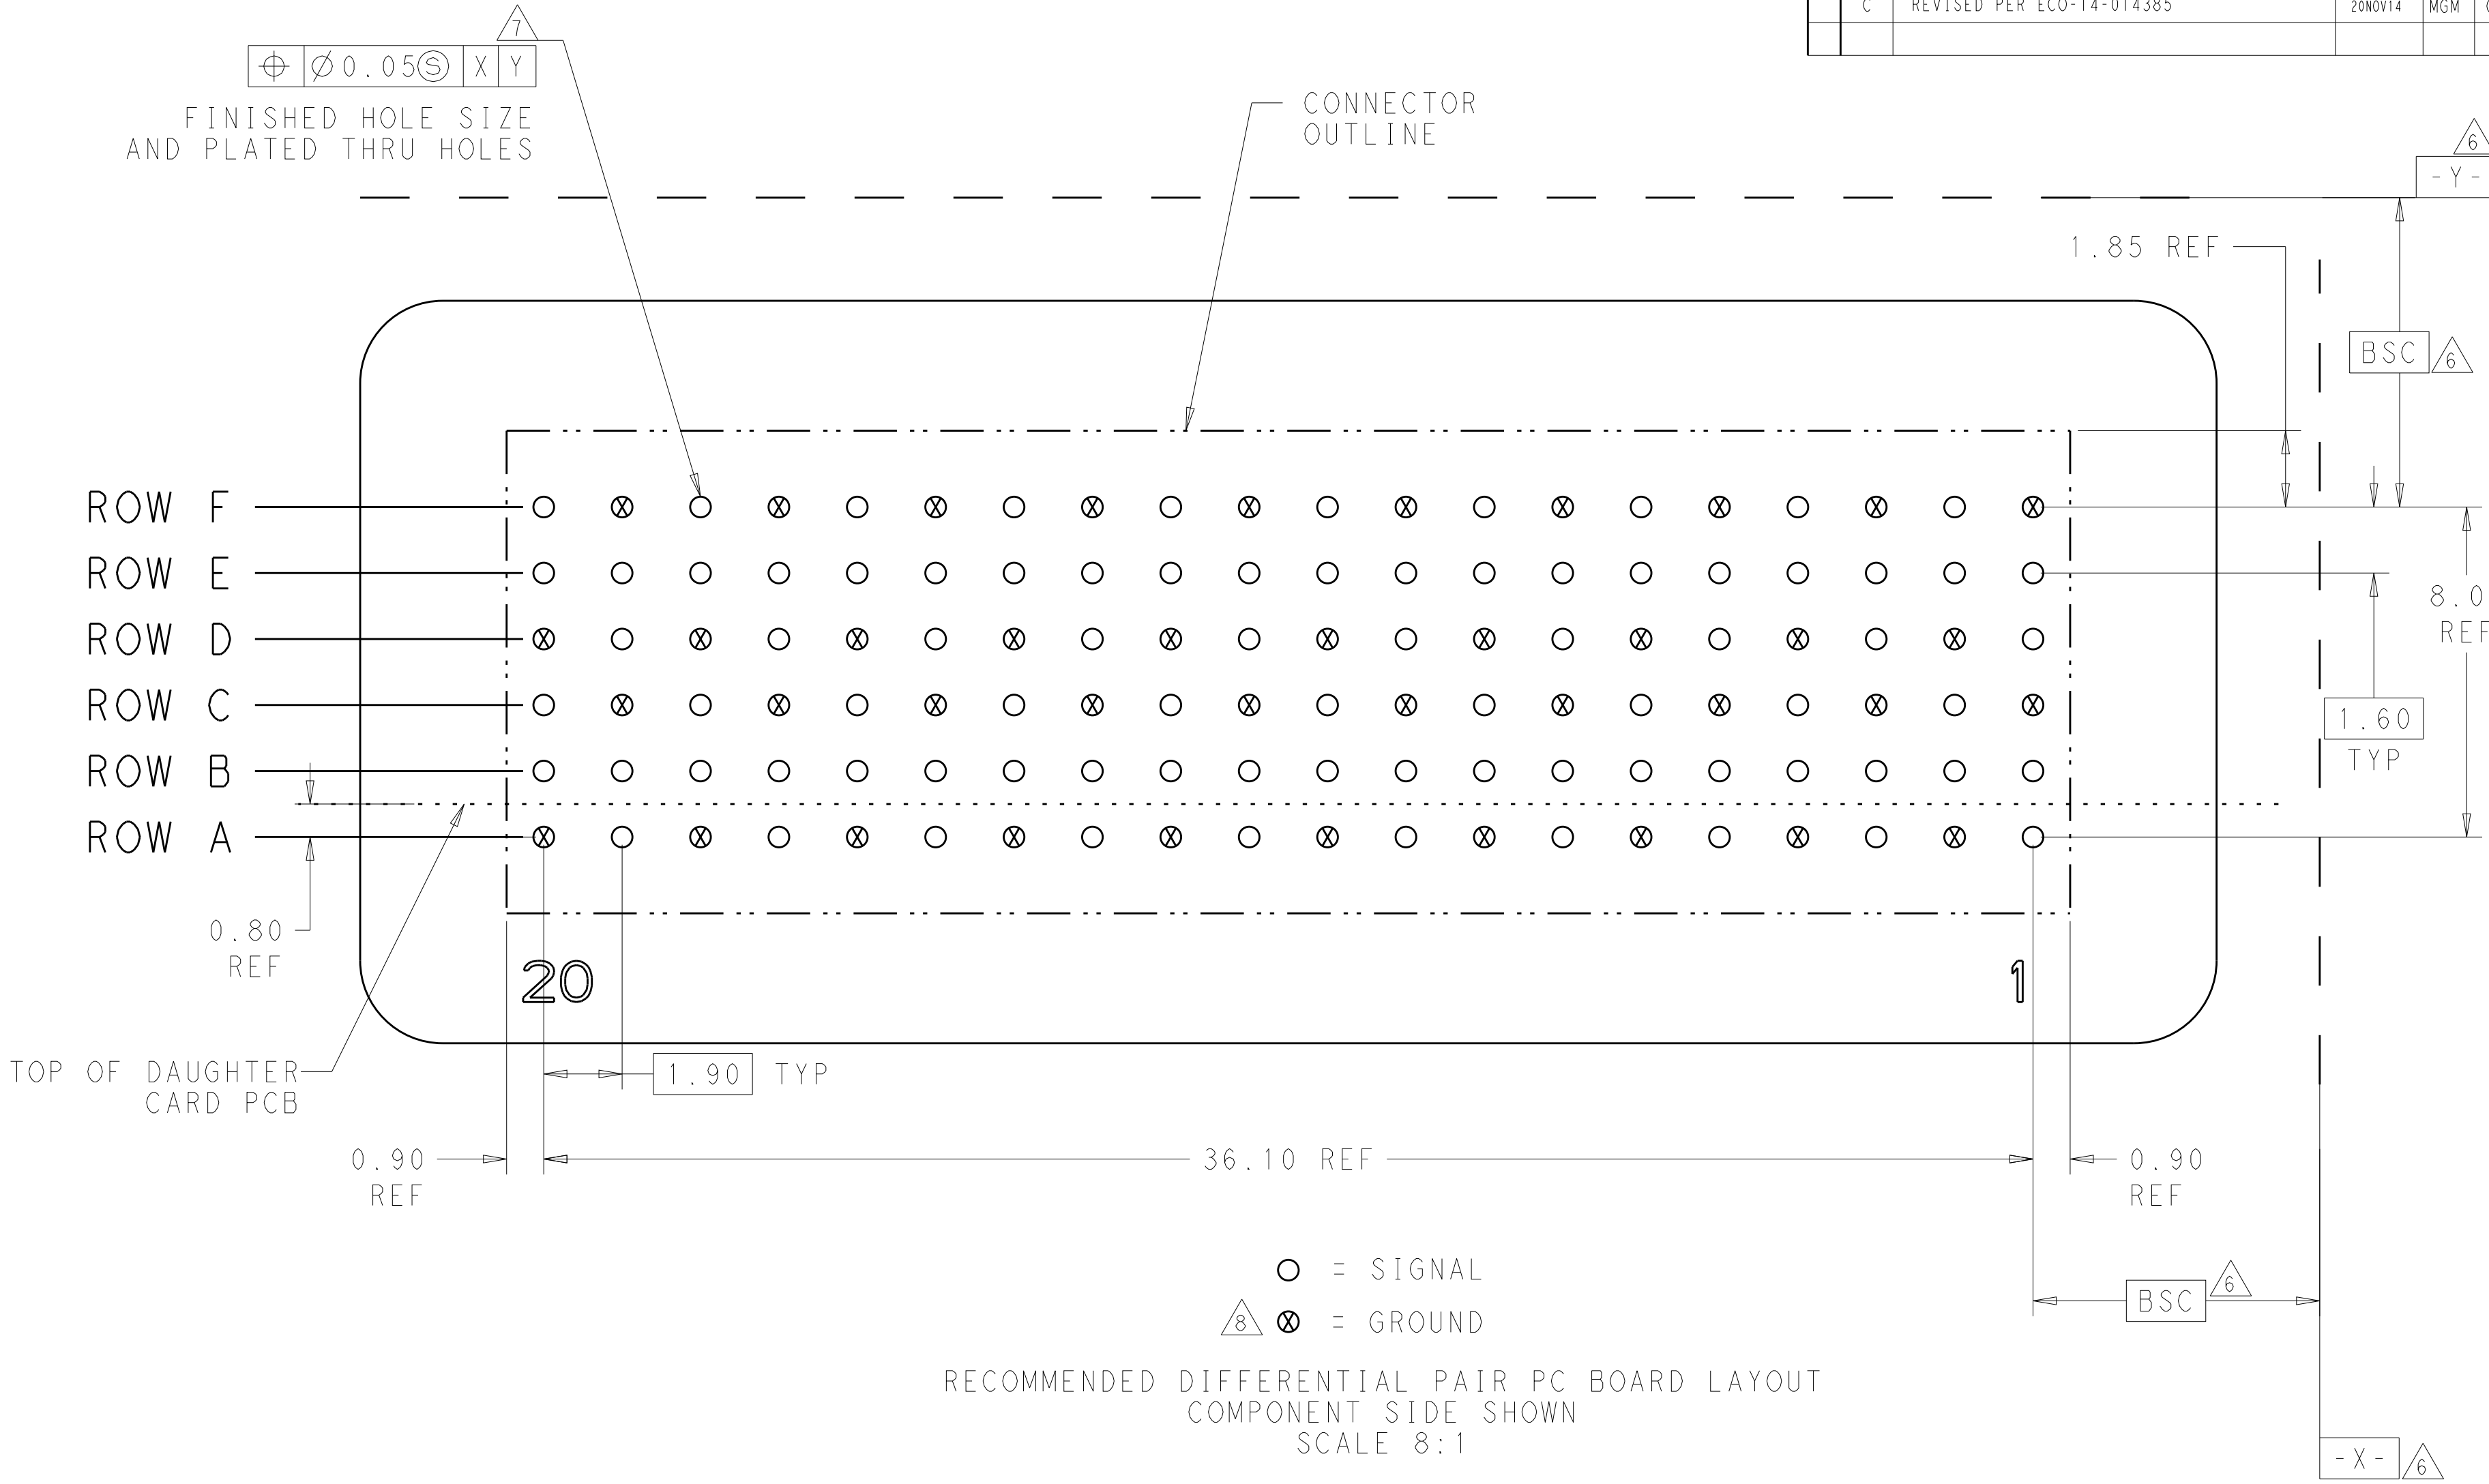
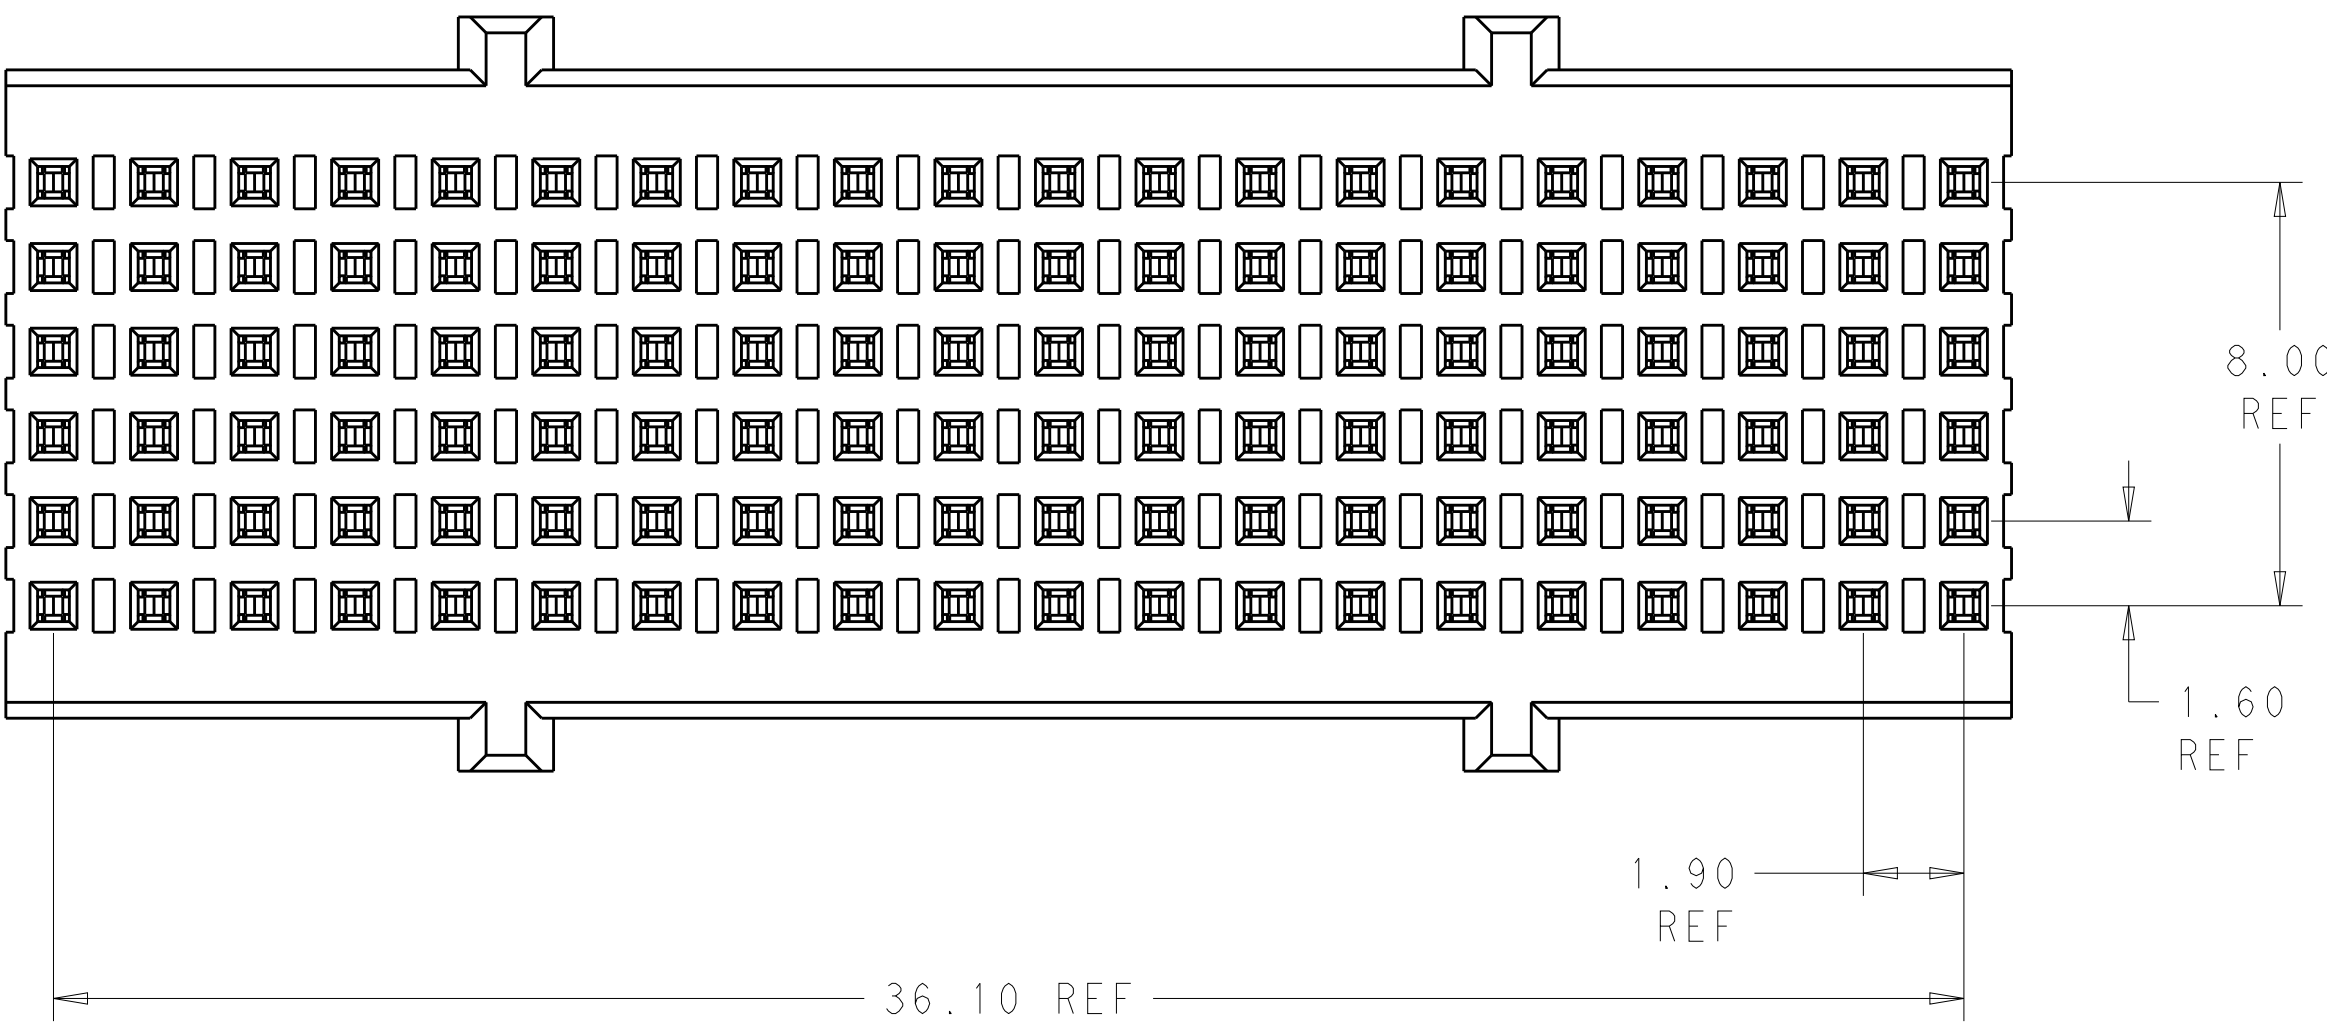
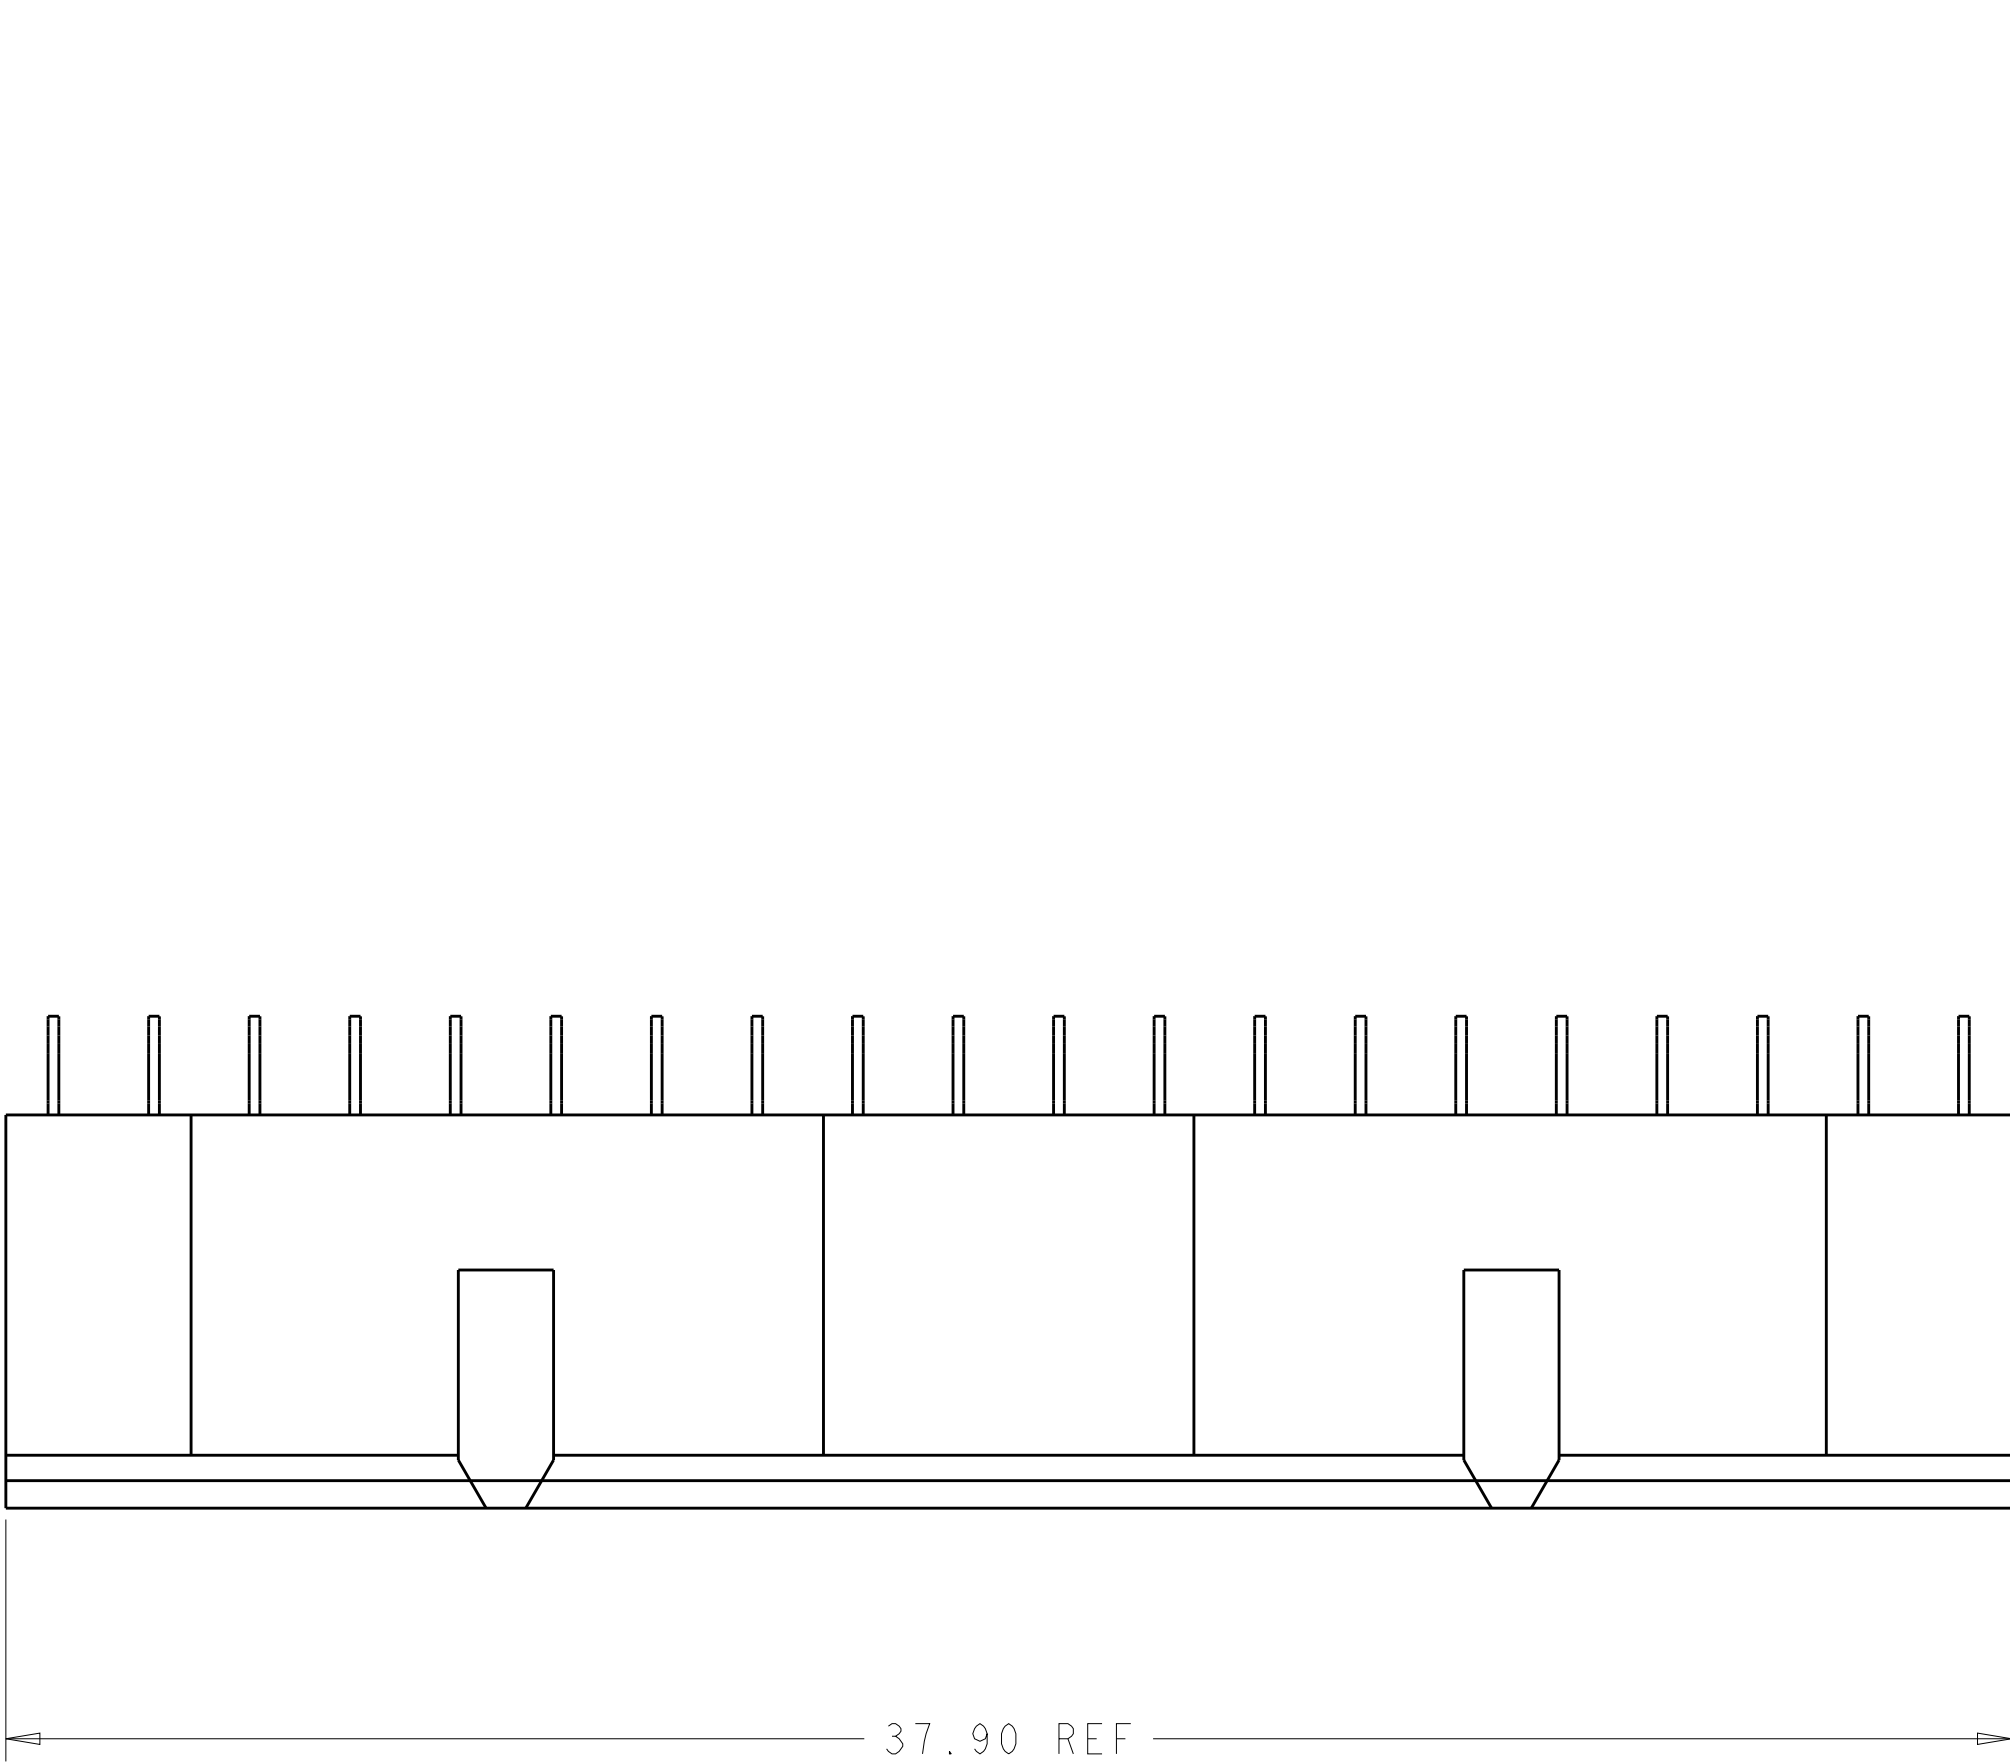


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
-	-	A		REVISED PER ECO-12-018102	11OCT2012	MGM
		B		ECO-13-004759	01APR2013	KG
		C		REVISED PER ECO-14-014385	20NOV14	MGM
						CT



- 1 MATERIAL:
CONTACT - COPPER ALLOY
HOUSING - LCP, COLOR - BLACK
- 2 FINISH:
MATING AREA: 1.27µm MIN GOLD OVER
1.25µm MIN NICKEL
- 3 FINISH:
COMPLIANT PIN AREA: 0.38µm MIN BRIGHT TIN LEAD
OVER 1.27µm MIN NICKEL
- 4 FINISH:
COMPLIANT PIN AREA: 0.38µm MIN MATTE TIN
OVER 1.27µm MIN NICKEL
- 5 --
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 REFERENCE APPLICATION SPEC 114-13267 FOR RECOMMENDED
PLATING THRU HOLE DIAMETER AND PLATING THICKNESS.
- 8 RECOMMENDED DIFFERENTIAL PAIR CONFIGURATION SHOWN.
THE CONNECTOR UTILIZES AN OPEN PIN FIELD AND
CAN BE LAID OUT IN A SINGLE-ENDED CONFIGURATION.

2 4	2102098-2
2 3	2102098-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		DWN D. BELACK 04NOV2010	 TE Connectivity	
DIMENSIONS: mm		CHK A. TSANG	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. McALONIS	Fortis Zd, 2-PAIR, 20-COLUMN VERTICAL, CENTER MODULE ASSEMBLY	
		PRODUCT SPEC 108-2409	SIZE CAGE CODE DRAWING NO A100779C-2102098	
		APPLICATION SPEC 114-13267		
MATERIAL 		WEIGHT ~ 4.88 g	RESTRICTED TO -	
Customer Drawing		SCALE 7:1 SHEET 1 OF 1 REV C		