



REV	ECRN	DATE
1	NEW PRODUCTION	20190528

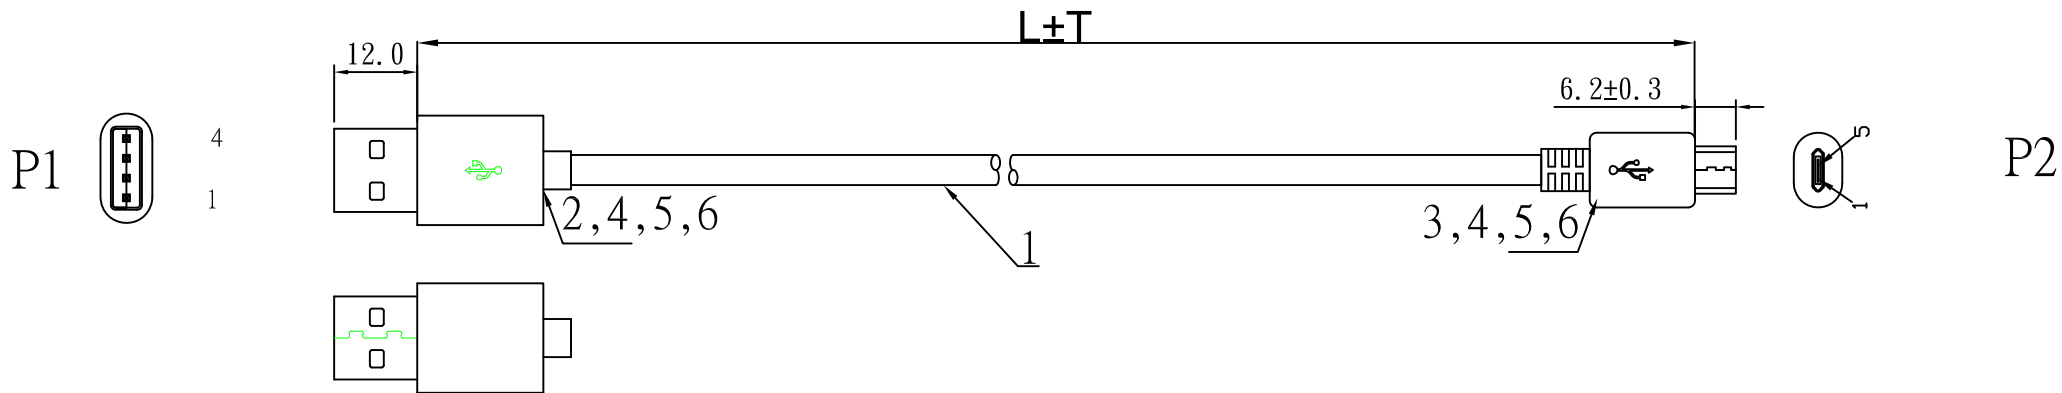

P/N	L(mm)	T(mm)	Cutting line size (mm)	朋联料号
	300	10	300	9.00ACCA2533.003R
	800	10	800	9.00ACCA2533.008R
	2000	30	2000	9.00ACCA2533.020R

NOTES:
 1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
 2. CONTACT RESISTANCE: 2 ohm,
 3. INSULATOR RESISTANCE: 5M ohm.
 4. HIGH VOLTAGE: DC 300V 0.01sec.
 5. MUST BE ROHS COMPLIANT.

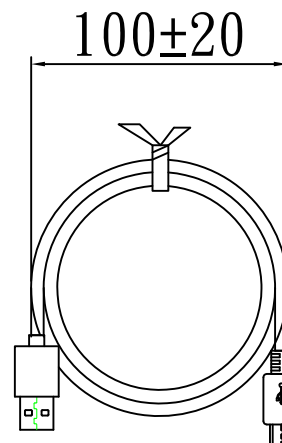

接线表

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	DRAIN	5

⑦	I.000001.0400R	TIE	L=100mm COLOR BLACK	1	PCS
⑥	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
⑤	C.085P01.0200R	MOLDING	TPE 85A BLACK	10	G
④	C.000000.0000R	MOLDING	PE	3	G
③		CONNECTOR	MICRO USB 5P PIN GOLDDED PLATED SHELL NICKEL PLASTIC:BLACK Double sided insert	1	PCS
②	B.01004M.0N01R	CONNECTOR	USB A/M 4P PIN GOLDDED PLATED SHELL NICKEL PLASTIC: WHITE Double sided insert	1	PCS
①		CABLE	NO UL32AWG (11/0.06TS)*2C+23AWG (98/0.0.06TS)*1C+D (41/0.08TS)*1C+AL+B(16/4/0.08TS) JACKET TPE 65A BLACK OD:2.8MM L=1000MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT

RoHS COMPLIANT		朋联电子有限公司 DongGuan PengLian Electronics Co.,Ltd TEL:076938835098/38835095 FAX:076938835091	
DRAWN BY		比例: FREE	TITLE: USB 2.0 A/M TO MICRO USB 5P
CHECKED BY		单位: mm	SUPPLIER`S ITEM: 9.00ACCA2533.XXXR
APPROVED BY			CUSTOMER: SPARK FUN
			CUSTOMER`S ITEM:
		DRAWING NO. ACCA-2533	DATE 2019.05.28