

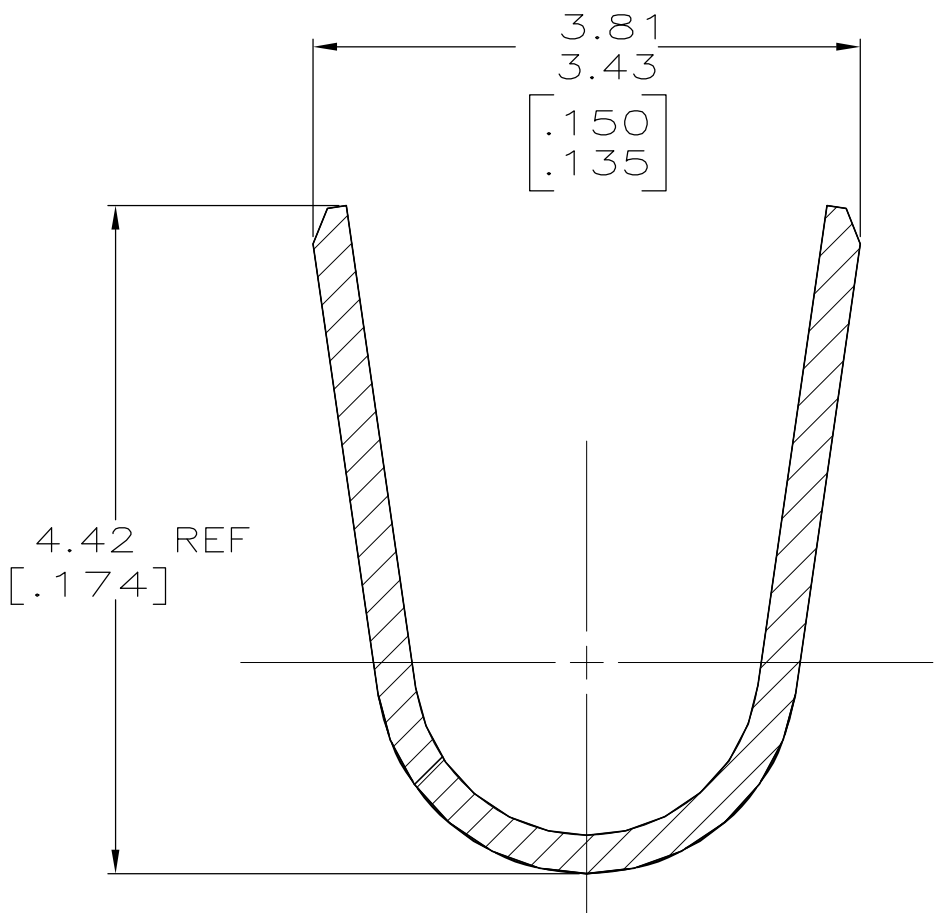
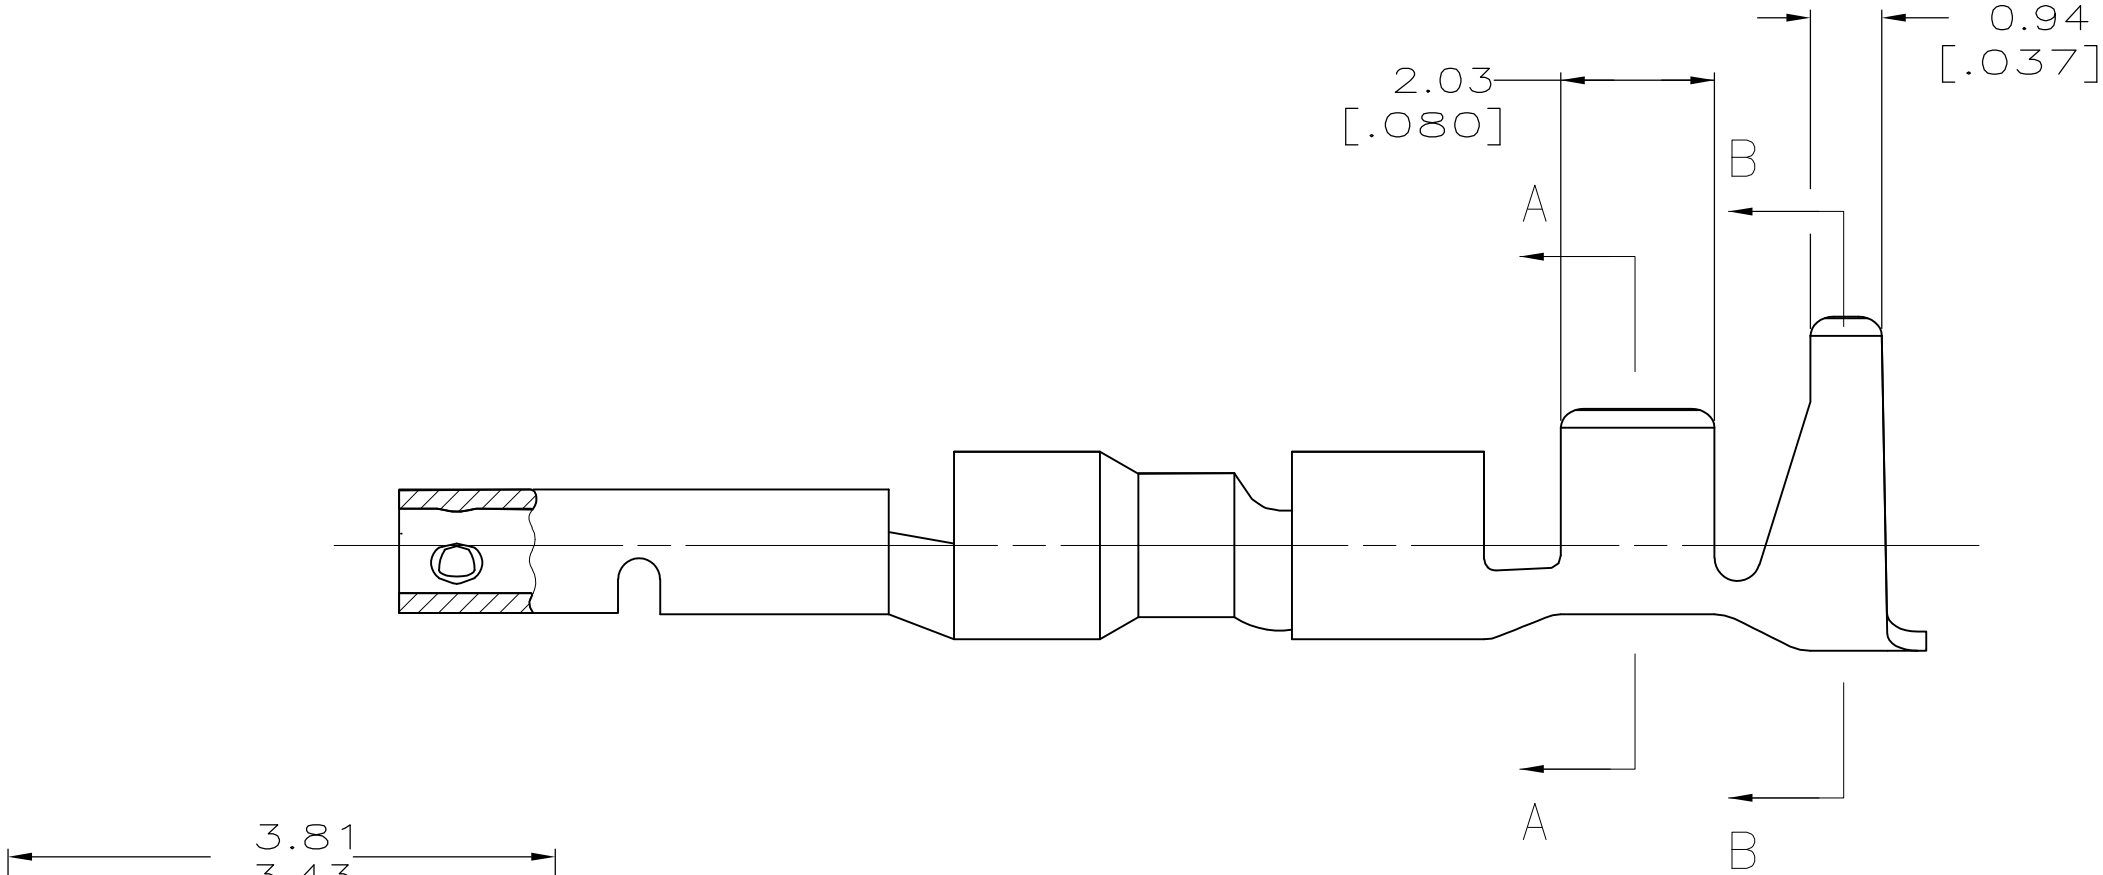


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
		F	F1			APVD
CM	0			REVISED PER 0G3B-0237-05	9/21/05	SS
				REVISED PER ECR-14-000999	25JUL14	GK
						CJ
						KD

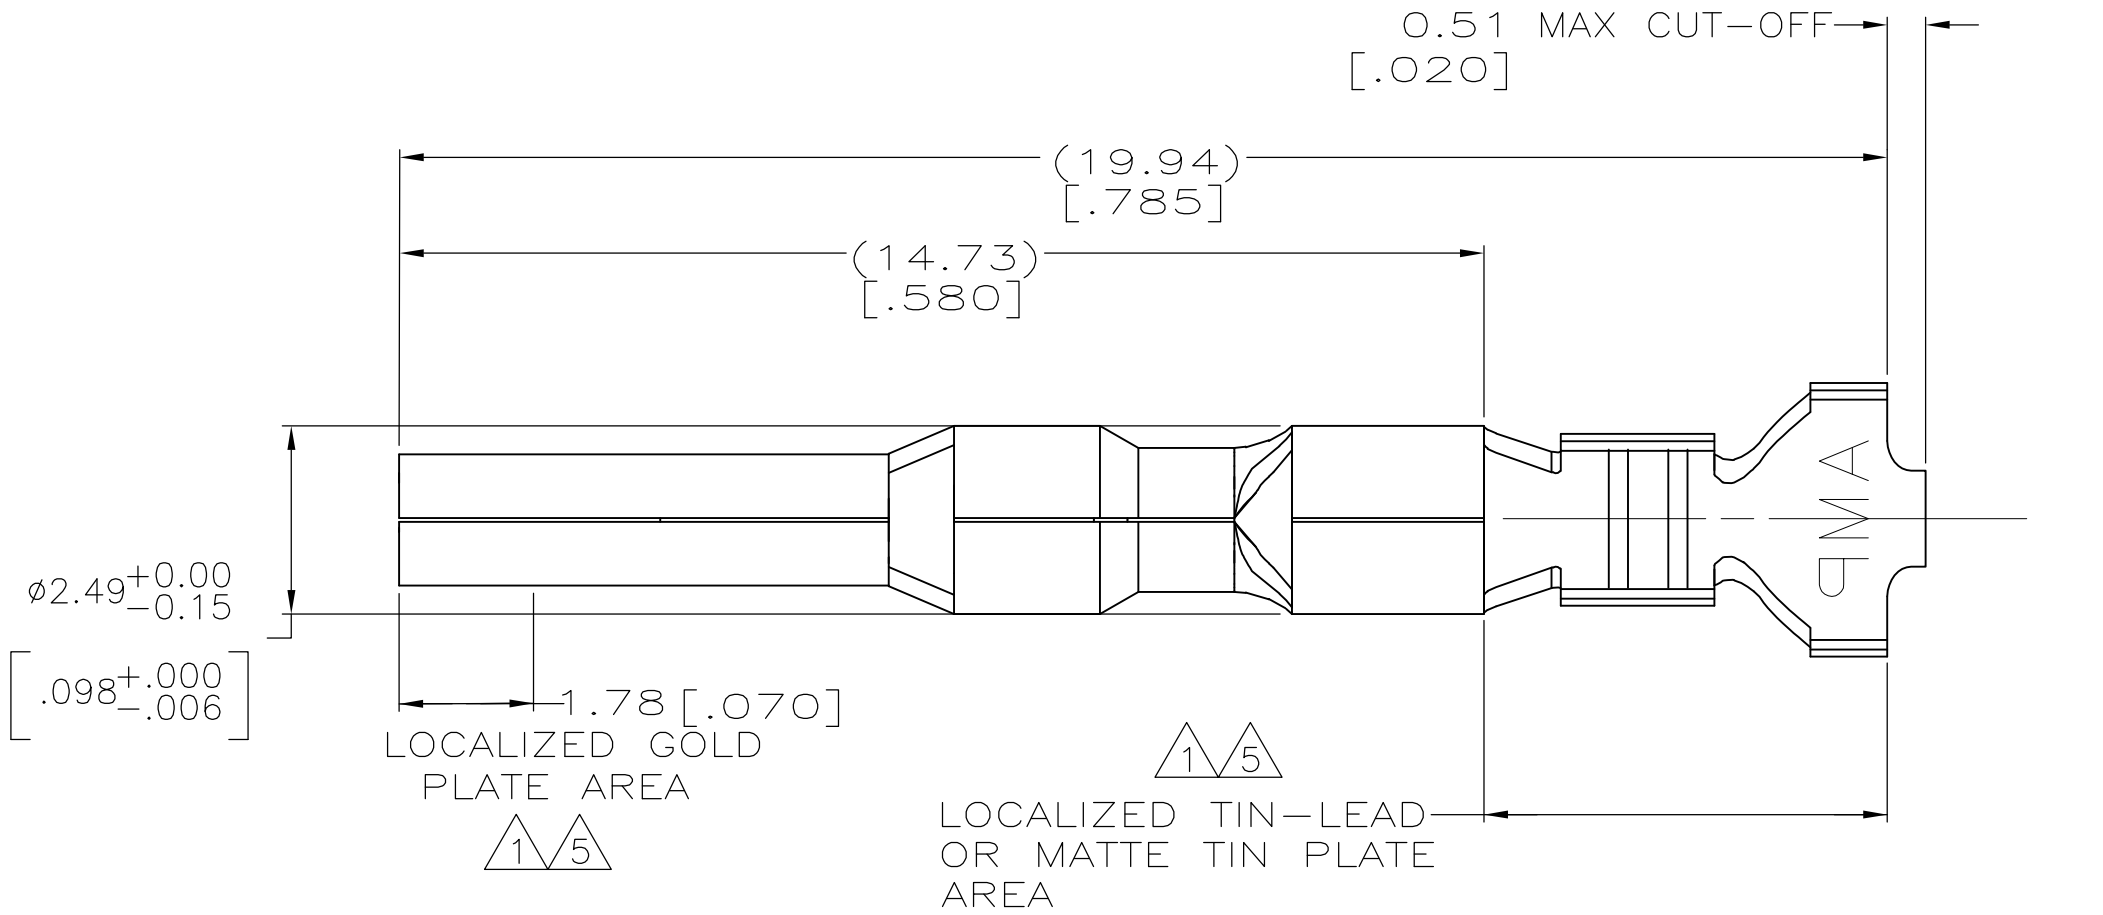

SECTION B-B
SCALE 20:1

1. 0.00076 [0.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [0.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.0013 [0.000050] MIN NICKEL.
2. WIRE RANGE: 0.3 – 0.9MM² (22–18 AWG).
3. INSULATION RANGE: 1.50–2.79[0.059–.110] DIA.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.
5. 0.00076 [0.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [0.000100] MIN MATTE TIN IN LOCALIZED TIN PLATE AREA OVER 0.0013 [0.000050] MIN NICKEL.

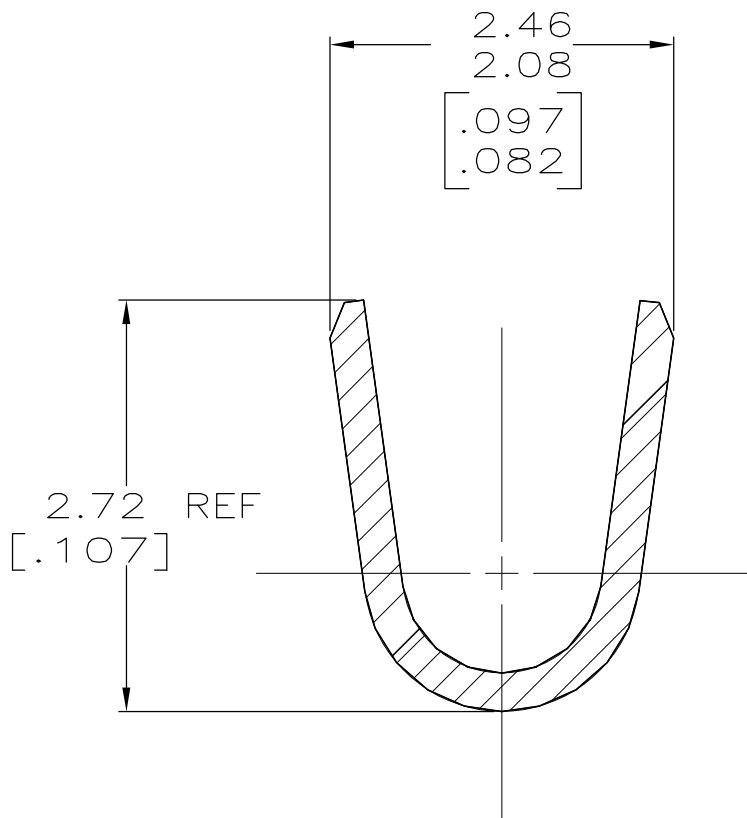

SECTION A-A
SCALE 20:1

5	0.25[.010] BRASS	1-794229-0
1	0.25[.010] BRASS	794229-3
PRE-TIN	0.25[.010] BRASS	794229-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 1-15-97	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK R. SWING 1-15-97				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± -		PRODUCT SPEC			
	1 PLC ± -		APPLICATION SPEC			
MATERIAL		FINISH	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE TABLE		SEE TABLE	A2	00779	C=794229	-
CUSTOMER DRAWING				SCALE	SHEET	REV
				10:1	1 OF 1	F1