


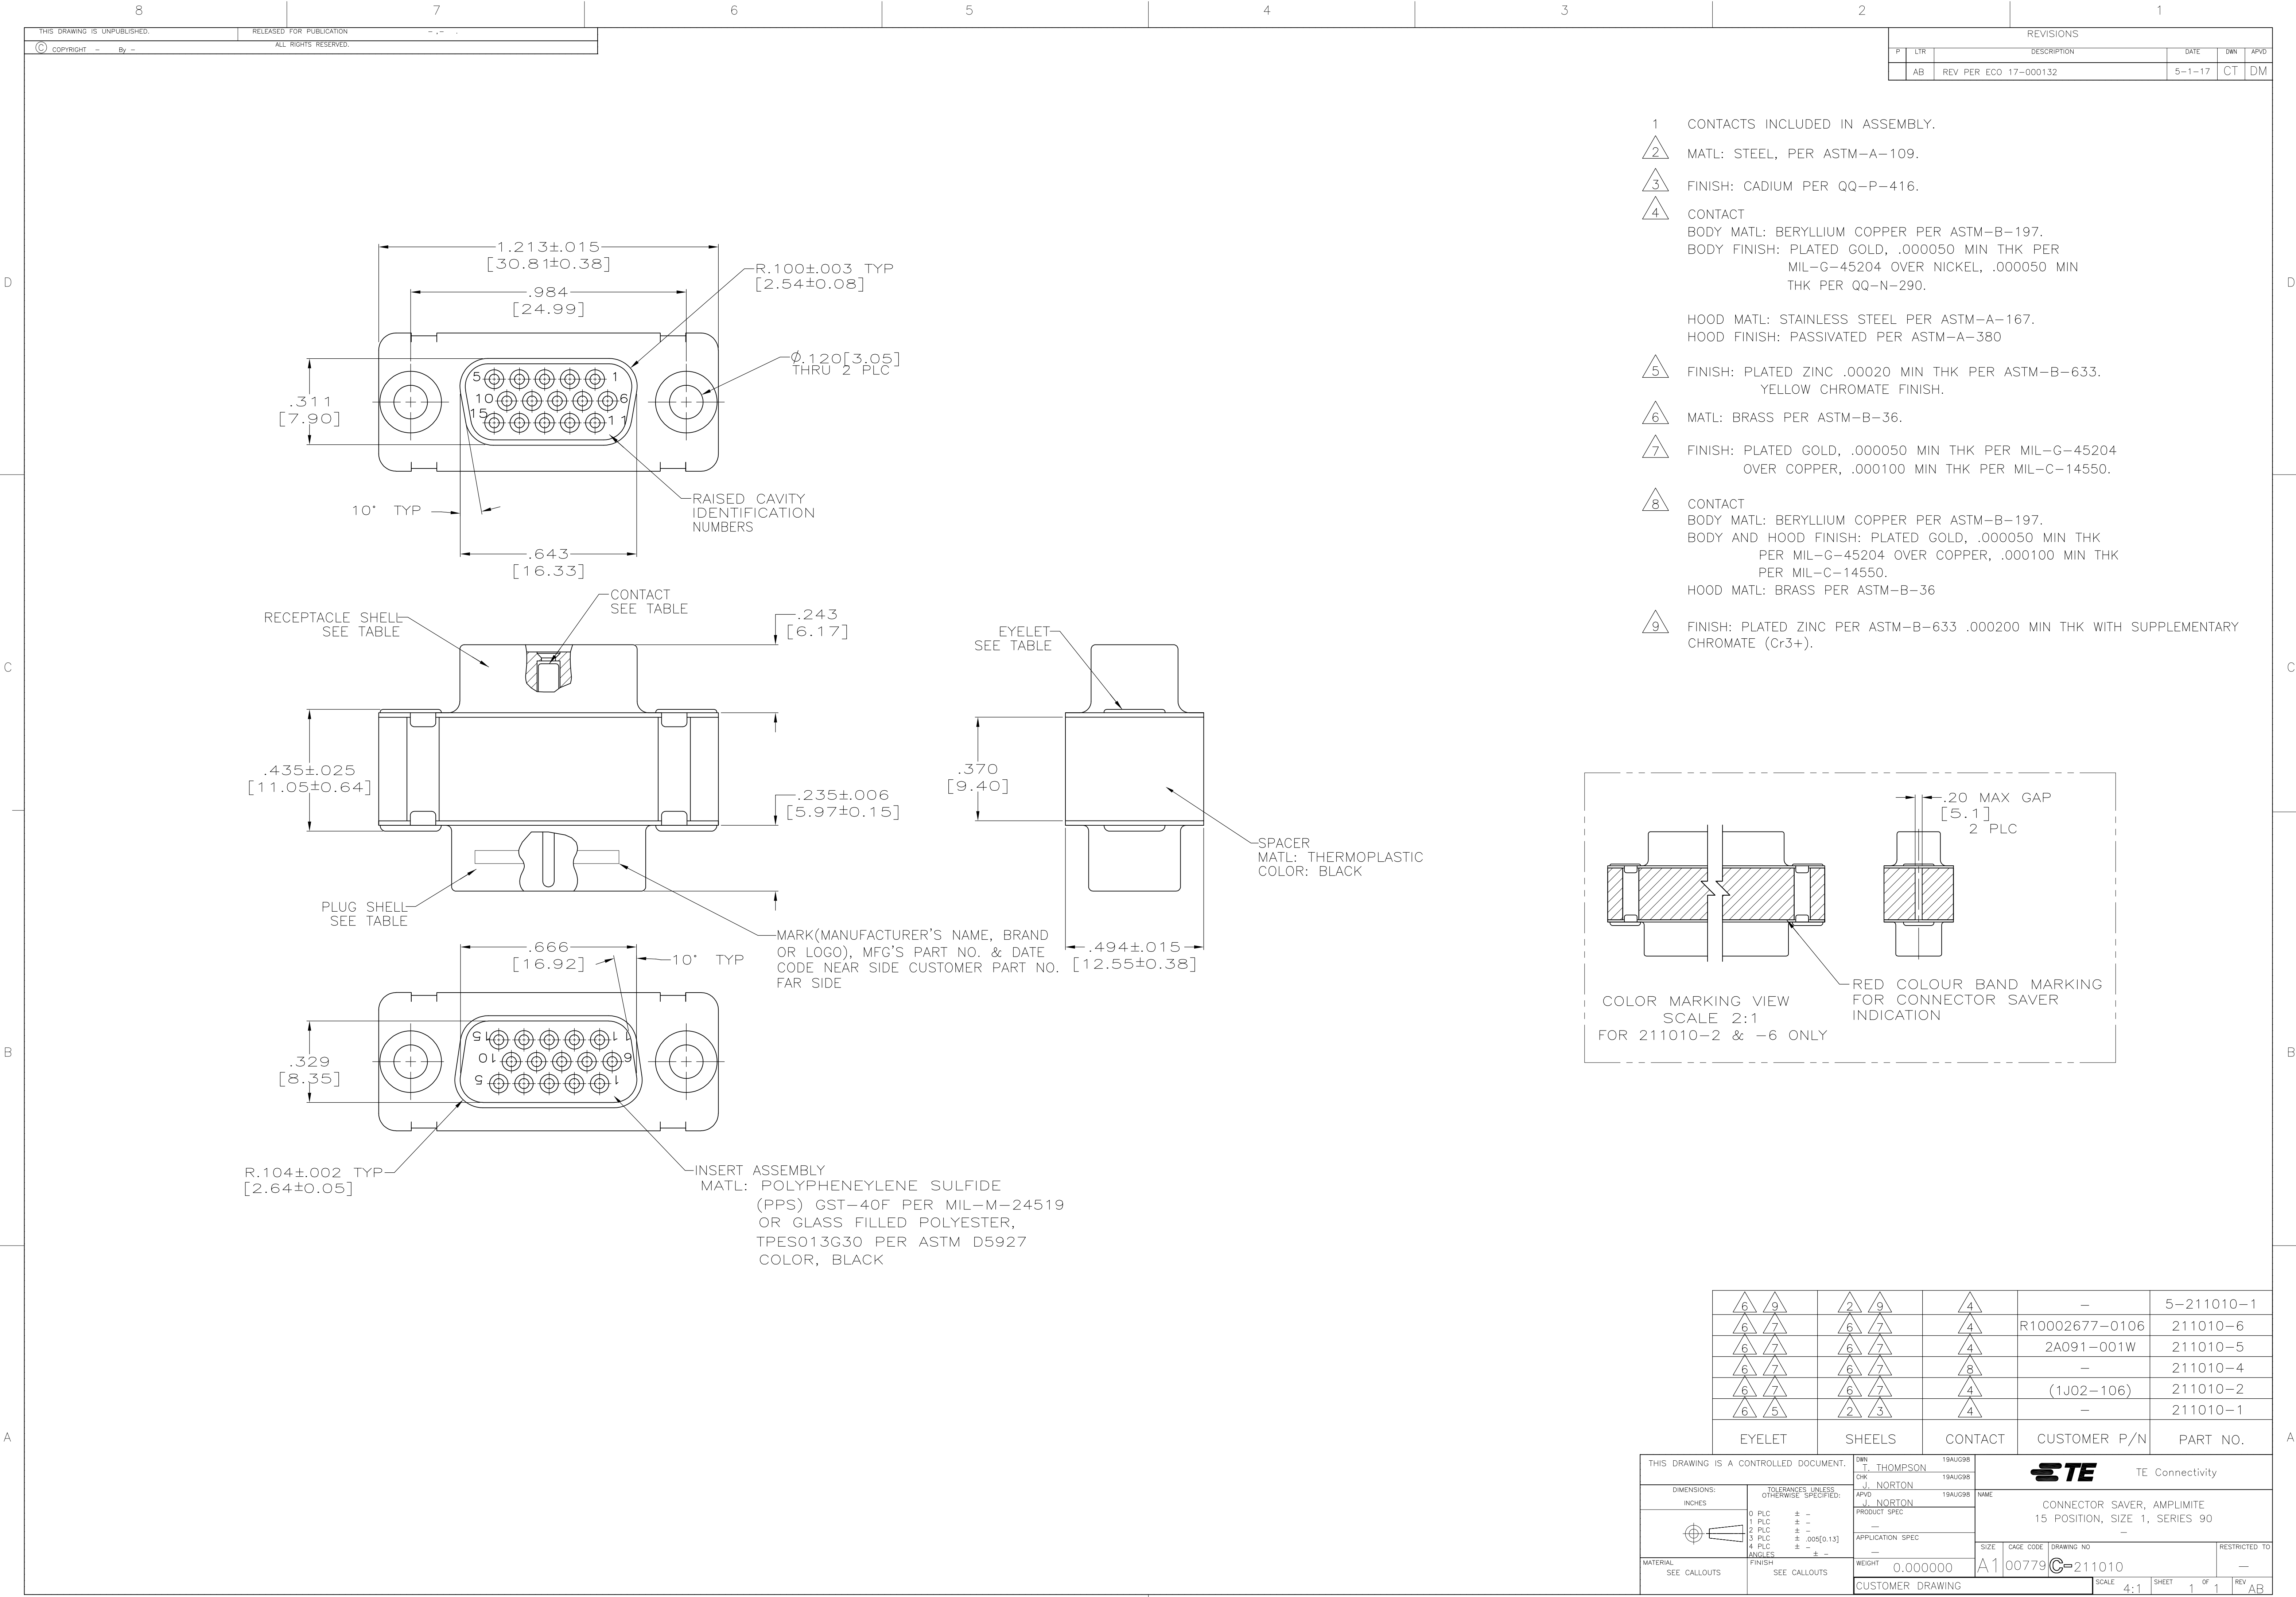

- 1

CONTACTS INCLUDED IN ASSEMBLY.
- 2

MATL: STEEL, PER ASTM-A-109.
- 3

FINISH: CADMIUM PER QQ-P-416.
- 4

CONTACT
BODY MATL: BERYLLIUM COPPER PER ASTM-B-197.
BODY FINISH: PLATED GOLD, .000050 MIN THK PER MIL-G-45204 OVER NICKEL, .000050 MIN THK PER QQ-N-290.
- 5

HOOD MATL: STAINLESS STEEL PER ASTM-A-167.
HOOD FINISH: PASSIVATED PER ASTM-A-380
- 6

FINISH: PLATED ZINC .00020 MIN THK PER ASTM-B-633.
YELLOW CHROMATE FINISH.
- 7

MATL: BRASS PER ASTM-B-36.
- 8

FINISH: PLATED GOLD, .000050 MIN THK PER MIL-G-45204 OVER COPPER, .000100 MIN THK PER MIL-C-14550.
- 9

CONTACT
BODY MATL: BERYLLIUM COPPER PER ASTM-B-197.
BODY AND HOOD FINISH: PLATED GOLD, .000050 MIN THK PER MIL-G-45204 OVER COPPER, .000100 MIN THK PER MIL-C-14550.
HOOD MATL: BRASS PER ASTM-B-36
- 9

FINISH: PLATED ZINC PER ASTM-B-633 .000200 MIN THK WITH SUPPLEMENTARY CHROMATE (Cr3+).

6 9	2 9	4	—	5-211010-1
6 7	6 7	4	R10002677-0106	211010-6
6 7	6 7	4	2A091-001W	211010-5
6 7	6 7	8	—	211010-4
6 7	6 7	4	(1J02-106)	211010-2
6 5	2 3	4	—	211010-1
EYELET		SHEELS	CONTACT	CUSTOMER P/N
				PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. THOMPSON 19AUG98	 TE Connectivity				
		CHK J. NORTON 19AUG98					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. NORTON 19AUG98	NAME	CONNECTOR SAVER, AMPLIMITE 15 POSITION, SIZE 1, SERIES 90 —			
		PRODUCT SPEC					
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005(0.13) 4 PLC ± — ANGLES ± —	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		—					
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT 0.000000	A1	00779	C=211010	—	
		CUSTOMER DRAWING		SCALE	4:1	SHEET 1 OF 1	REV AB