

SIGN	DATE	DESCRIPTION	APPROVER
△	02/27'07	Part No. is changed.	Aaron
△	10/13'11	Operating temperature is changed	ChenMing
△	10/13'11	Remove the "VDE" mark	ChenMing
△	10/13'11	The dimension is changed from 22.90 to 22.9	ChenMing
△		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

## Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated

## Electrica

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval:
- Critical dimension: ▽

△ TN 06 2 x 1 0 xxxx G

0 Black  
9 White

RoHS compliant  
(lead<4%)  
In copper Alloy




0000 Standard @ Logo  
000A Standard ANY Logo  
Any special item by  
customer request,  
please contact sales  
department.

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TN-4.5mm 180D Series 6P Without cover						
PART NO.	TN062X10XXXXG			DWG NO.	8TN0202		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	<div> <div> </div> <div> UNIT: mm SCALE: NONE SHEET: 01/01 </div> </div>		
			ChenMing 2011.10.13				
				Tolerance		X.	±0.50
						X.X	±0.30
						X.XX	±0.10
						X°	±1°

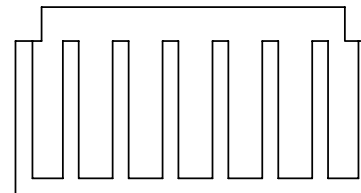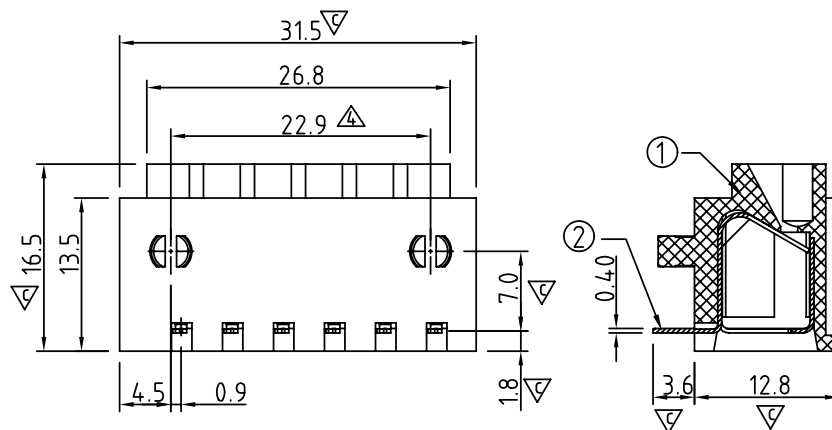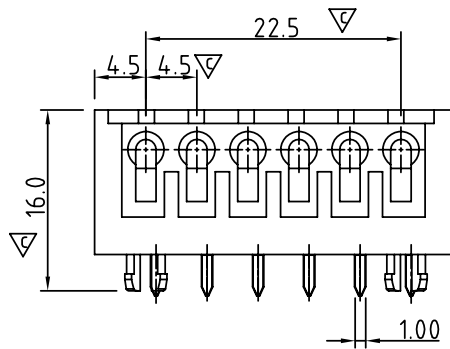

## P.C.B LAYOUT

